12R5.2

::Driver:_____ ::Date:_____

::Track:_____


::Event:_____

Setup sheet for Team Associated's 12R5.2

::Front Suspension

Ride height: _____

Upper arm mounts: ☐ 0° ☐ 5° ☐ 10°

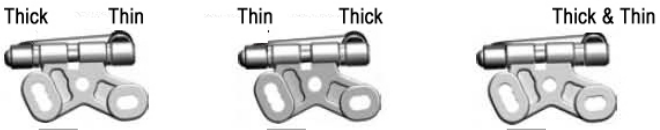

☐ 1.80° ☐ 3.25° ☐ 6.15°

Camber: ° Toe: °

Droop: _____

Bumpsteer shims: _____

King pin lube: _____

Springs: _____

Front Brace: ☐ None ☐ Soft ☐ Hard _____

Front width: _____

Roll Center

Shims on top of the steering block: _____

Shims between bulkhead and caster block: _____

Notes:

::Rear Suspension

Ride height adjuster: _____

Chassis ride height: _____

Pod ride height: _____

Droop: _____

Rear width: _____

Shims under pivot: _____

Center damper

Brand: _____

Spring: _____

Oil: _____


Position: High Low



Side damper

Springs: _____

Oil: _____

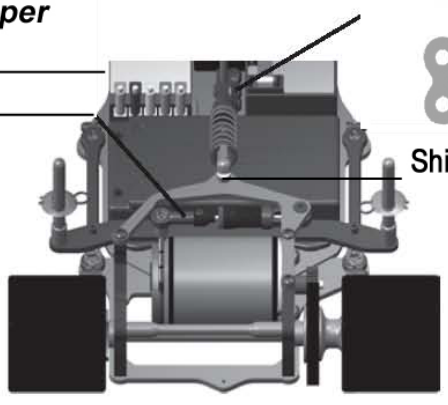

Shims: _____

Notes:

::Front Tires

Brand & compound: _____


Diameter: _____

Wheel: _____

Tire treatment: _____

Treatment time: _____

Surface treated: _____



Notes:

::Rear Tires

Brand & compound: _____


Diameter: _____

Wheel: _____

Tire treatment: _____

Treatment time: _____

Surface treated: _____



Notes:

::Body

Brand & model: _____

Notes:

::Track Info

Composition: ☐ Asphalt ☐ Carpet

Surface: ☐ Smooth ☐ Bumpy

Traction: ☐ High ☐ Medium ☐ Low

Notes:

::Motor / Battery

Motor: _____ Rotor: _____

Timing: _____

Pinion: _____ Spur: 90

Rollout: 0.000

Battery: _____

Plugs position: ☐ Front ☐ Back

::Speed Control

ESC: _____

Setting: _____

::Transmitter

Turning Circle: _____

Steering Expo: _____

Brake E.P.: _____

Throttle Expo: _____

Notes: