RC10B2 SETUP SHEET FOR THE 9000, 9011 KITS

TEAM ASSOCIATED

driver _____

track _____

date _____

FRONT SUSPENSION


FRONT BLOCK CARRIER (caster setting)

❑ 15° ❑ 20° ❑ 25° ❑ 30°


FRONT RIDE HEIGHT: _____

STEERING BLOCK _____ _____

CAMBER _____

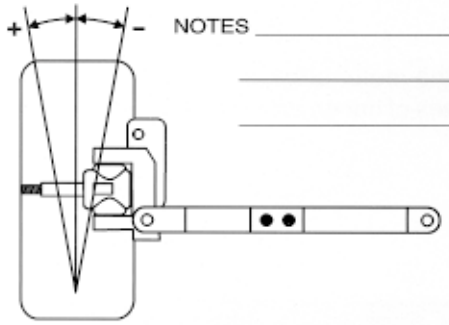

NOTES _____

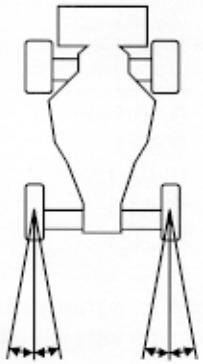

❑ TOE-IN _____°

❑ TOE-OUT _____°


FRONT SHOCKS

❑ STD ❑ OTHER OIL _____ PISTON _____

BODY _____ SHAFT _____ SPRING _____

LIMITERS, inside _____ outside _____

NOTES _____

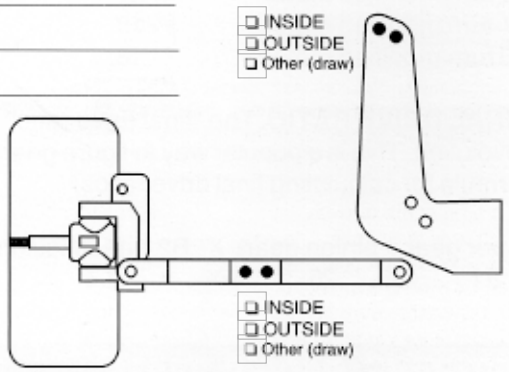

REAR SUSPENSION


SUSPENSION MOUNTS: ❑ 2° ❑ 3°

WHEEL HUB: ❑ 0° ❑ 1.5° ❑ 3°

REAR RIDE HEIGHT: _____


ANTI-SQUAT ❑ STD ❑ OTHER _____

CAMBER _____

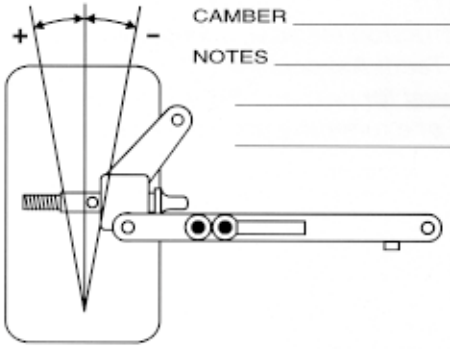

NOTES _____

WHEEL HUB PLACEMENT REAR

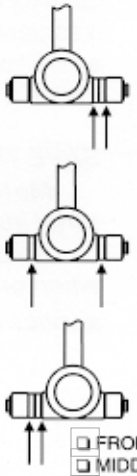


REAR SHOCKS

❑ STD ❑ OTHER OIL _____

PISTON _____ SPRING _____

LIMITERS, inside _____ outside _____

NOTES _____

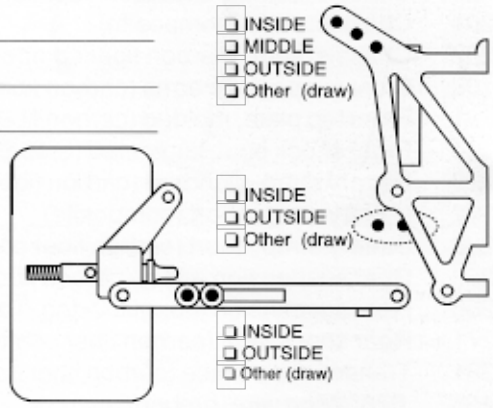

OTHER

TIRES & WHEELS

FRONT TIRES _____ ❑ FOAM _____

REAR TIRES _____ ❑ FOAM _____

FRONT WHEELS ❑ 1 PIECE ❑ 3 PIECE ❑ OTHER

CHASSIS ❑ STD ❑ SHORT ❑ GRAPHITE

MOTOR, TRANSMISSION & ELECTRICAL

MOTOR _____ PINION _____ SPUR GEAR _____

DRIVESHAFTS _____

SLIPPER ❑ STD ❑ HYDRA ❑ VISCO OIL _____

BATTERY TYPE _____ PLACEMENT ❑ FRONT ❑ MIDDLE ❑ REAR

RADIO _____ SPD. CONT. _____ SERVO _____

COMMENTS/EXCUSES _____

Editable by Arn0 at PetitRC.com