SET UP

Serpent 748 NATRIX e electric powered

RACE		DATE	
TRACK		QUALIFYING POSITION	
DRIVER		QUALIFYING TIME	
TRACTION: LOW ☐ MEDIUM ☐ HIGH ☐		STARTING POSITION	
TRACK TEMP		AIR TEMP	FINAL POSITION

FRONT DRIVE TRAIN REAR

FRONT	REAR
☐ GEAR DIFF cst	☐ GEAR DIFF cst
☐ ONE WAY	☐ SOLID
☐ SPOOL	

SHOCK ABSORBERS

FRONT	REAR
OIL cst	OIL cst
SPRINGS	SPRINGS

○ Open ● Closed

FRONT ANTI-ROLL BARS REAR

FRONT				REAR				
☐	☐	☐	☐	☐	☐	☐	☐	☐
1.8	2.2	2.5	2.8	1.6	1.8	2.0	2.2	2.5

FRONT TYRES REAR

RIGHT	LEFT	Controlled Tyre ☐	RIGHT	LEFT
		MAKE		
		SHORE		
		DIAMETER		
		5-MIN WEAR		

RATIO CONFIGURATION

SPUR GEAR			
PITCH		TEETH	
PINION			
PITCH		TEETH	
FINAL DRIVE RATIO		ROLL OUT	mm

ELECTRONICS

BATTERY:	2S ☐	3S ☐	4S ☐
BRAND		CAPACITY	
MOTOR			
BRAND	TYPE	TIMING	
ESC			
BRAND		TYPE	
CONFIGURATION			


AERODYNAMIC CONFIGURATION

BODY

BRAND TYPE

BODY POSITION mm

BUMPER HOLES CUT ☐ YES ☐ NO

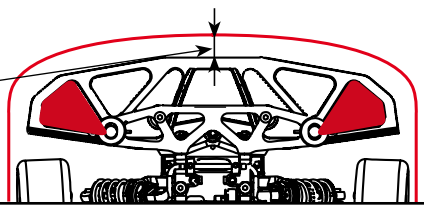

REMARKS

