# R12 SETUP SHEET
## 1/10 Electric Touring Car

ARC

RACE
TRACK
NAME
CITY
DATE

TEMPERATURE AIR TRACK

| QUALIFYING | BEST LAP TIME SEC | FINAL | RACE LENGTH MIN |
|---|---|---|---|
| | | | |

TRACK CONDITION: ☐ CARPET ☐ ASPHALT ☐ INDOOR ☐ OUTDOOR ☐ BUMPY ☐ SMOOTH ☐ TECHNICAL ☐ MIXED ☐ FAST

TRACTION: ☐ LOW ☐ MEDIUM ☐ HIGH

### TRANSMISSION

BELT
FRONT ☐ STD ☐ SOFT
REAR ☐ STD ☐ SOFT

GEAR DIFF OIL

NUMBER OF GEARS ☐ 2 ☐ 4

MOTOR | ESC

PINION T SPUR GEAR 1 T FDR

### SHOCK SET

☐ PDS FRONT ☐ PDS REAR

| FRONT | | REAR |
|---|---|---|
| | OIL | |
| | SPRING | |
| | PISTON | |
| % | REBOUND | % |

### ANTI-ROLL BAR

FRONT mm REAR mm

TIRES
ADDITIVE
ADDITIVE TIMING

FL FR RL RR TREATED AREA

BODY MOUNT DISTANCE mm

BODY | WING

### STEER BLOCK SHIMS

1.0mm / 0mm
0.5mm / 0.5mm
0mm / 1.0mm

### STEER BLOCK SETUP


R118041

BUMP STEER SHIMS mm


Arno / PetitRC

NOTES

## FRONT

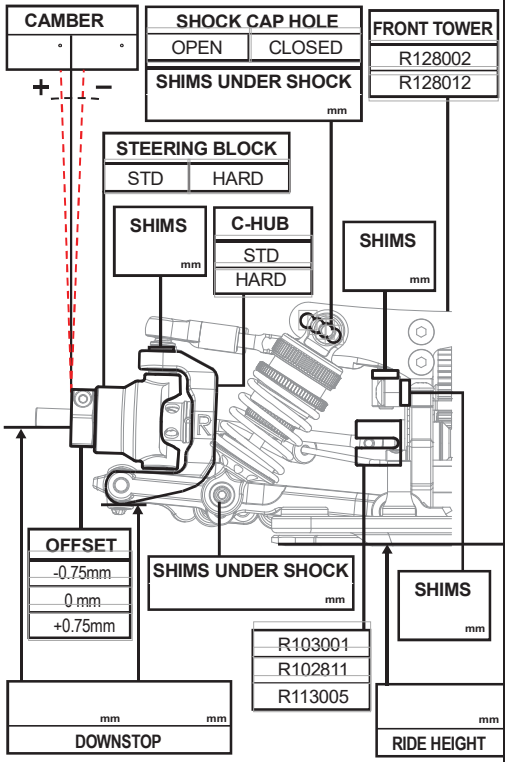


## REAR

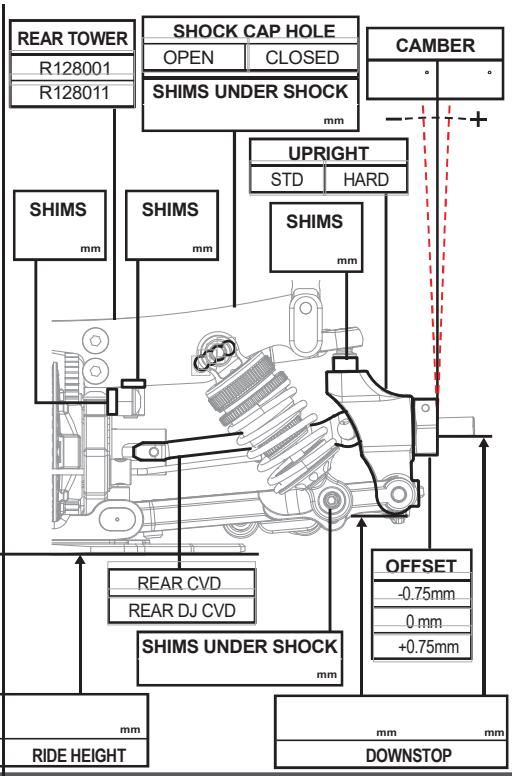


| FRONT ARM | | ARM HARDNESS | | |
|---|---|---|---|---|
| SHORT | LONG | HARD | STD | SOFT |

SHOCK POSITION

| REAR ARM | | ARM HARDNESS | | |
|---|---|---|---|---|
| SHORT | LONG | HARD | STD | SOFT |

SHOCK POSITION

## SUSPENSION INSERT CHART

FF ☐ 0 ☐ 0.5 ☐ 1.0 ☐ 1.5 ☐ 2.0
☐ Alu ☐ Brass
SHIMS mm

FR ☐ 0 ☐ 0.5 ☐ 1.0 ☐ 1.5 ☐ 2.0
☐ Alu ☐ Brass
SHIMS mm
☐ Alu ☐ Brass
SHIMS mm

RF ☐ 0 ☐ 0.5 ☐ 1.0 ☐ 1.5 ☐ 2.0
☐ Alu ☐ Brass
SHIMS mm


RR ☐ 0 ☐ 0.5 ☐ 1.0 ☐ 1.5 ☐ 2.0
☐ Alu ☐ Brass
SHIMS mm

## ATS SETUP


ACTIVE TOE

ATS OUTSIDE SHIMS mm

ATS INSIDE SHIMS mm

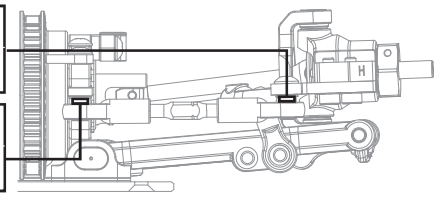

ATS BLOCK



TOE OUT ° IN °

| FRONT UPPERDECK | REAR UPPERDECK |
|---|---|
| R128005 | R128005 |
| R128016 | R128016 |

REAR ARM
STANDARD
ATS SYSTEM

BATTERY WEIGHT g

BATTERY MOUNT
TAPE
R119016

mm
mm

DIFF HEIGHT
HIGH
LOW

BALL END
STANDARD
LOW FRICTION

CHASSIS
ALUMINUM CARBON
mm ver

R128009

REAR BODY POST
STANDARD
HORIZONTAL