# R8.4EL SET-UP SHEET ARC

RACE
TRACK
DRIVER
CITY
DATE

| TEMPERATURE | AIR | TRACK |
|---|---|---|
| | | |

| QUALIFYING POSITION | BEST LAPTIME (SEC) | FINAL POSITION | RACE LENGTH (MIN) |
|---|---|---|---|
| | | | |

TRACK CONDITION ☐ TECHNICAL ☐ MIXED ☐ FAST

TRACTION ☐ LOW ☐ MEDIUM ☐ HIGH

## GEAR RATIO CHART

| Spur / Pinion | 56 | 57 | 58 | 60 | 61 | 62 |
|---|---|---|---|---|---|---|
| 22 | ☐ 6.11 | ☐ 6.22 | ☐ 6.33 | ☐ 6.55 | ☐ 6.65 | ☐ 6.76 |
| 23 | ☐ 5.84 | ☐ 5.95 | ☐ 6.05 | ☐ 6.26 | ☐ 6.37 | ☐ 6.47 |
| 24 | ☐ 5.60 | ☐ 5.70 | ☐ 5.80 | ☐ 6.00 | ☐ 6.10 | ☐ 6.20 |
| 25 | ☐ 5.38 | ☐ 5.47 | ☐ 5.57 | ☐ 5.76 | ☐ 5.86 | ☐ 5.95 |
| 26 | ☐ 5.17 | ☐ 5.26 | ☐ 5.35 | ☐ 5.54 | ☐ 5.63 | ☐ 5.72 |
| 27 | ☐ 4.98 | ☐ 5.07 | ☐ 5.16 | ☐ 5.33 | ☐ 5.42 | ☐ 5.51 |
| 28 | ☐ 4.80 | ☐ 4.89 | ☐ 4.97 | ☐ 5.14 | ☐ 5.23 | ☐ 5.31 |
| 29 | ☐ 4.63 | ☐ 4.72 | ☐ 4.80 | ☐ 4.97 | ☐ 5.05 | ☐ 5.13 |
| 30 | ☐ 4.48 | ☐ 4.56 | ☐ 4.64 | ☐ 4.80 | ☐ 4.88 | ☐ 4.96 |

## SHOCK

| Front | | Rear |
|---|---|---|
| | OIL | |
| | SPRING | |
| | PISTON | |

## TIRE

| Front | | Rear |
|---|---|---|
| Front Left ° / Front Right ° | Tire Shore | Rear Left ° / Rear Right ° |
| Front Left mm / Front Right mm | Tire ∅ | Rear Left mm / Rear Right mm |
| | Tire Additive | |

## BODY

Bumper: ☐ Standard ☐ Cut

BODY MOUNT DISTANCE mm


| BODY | WING mm |
|---|---|
| | |

## NOTE

WHEEL BASE mm mm

BUMP STEER mm


CASTER mm

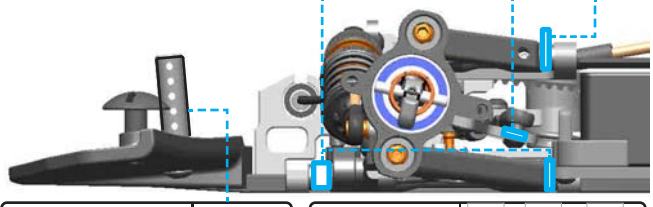


TOWER POSITION mm

FRONT ARM ☐ S ☐ M ☐ H

REAR UPRIGHTSHIMS mm




### STEERING BLOCK SETUP



| CENTER R806021 | CENTER | BACKWARD | FORWARD | LOWER | UPPER |
|---|---|---|---|---|---|
| | | | | | |

### ECCENTER HUB




| ☐ Up | ☐ Middle | ☐ R806021 |
|---|---|---|

REAR ARM ☐ S ☐ M ☐ H

## FRONT

RIDE HEIGHT mm

FRONT UPPER ARM ☐ ☐ ☐

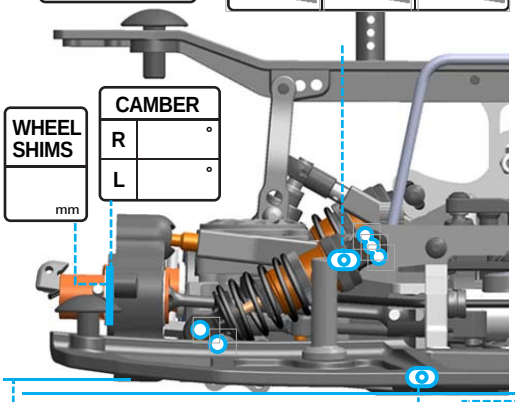

WHEEL SHIMS mm

CAMBER R ° L °

DOWN STOP mm

FRONT LOW ARM ☐ ☐ ☐

REAR ROLL CENTER ☐ ☐

I-TYPE


## REAR

☐ 1 HOLE

2 HOLES ☐ INSIDE

2 HOLES ☐ OUTSIDE

RIDE HEIGHT mm

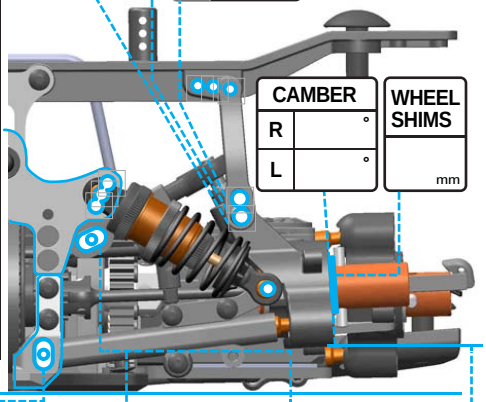


CAMBER R ° L °

WHEEL SHIMS mm

REAR UPPER LINK ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

DOWN STOP mm

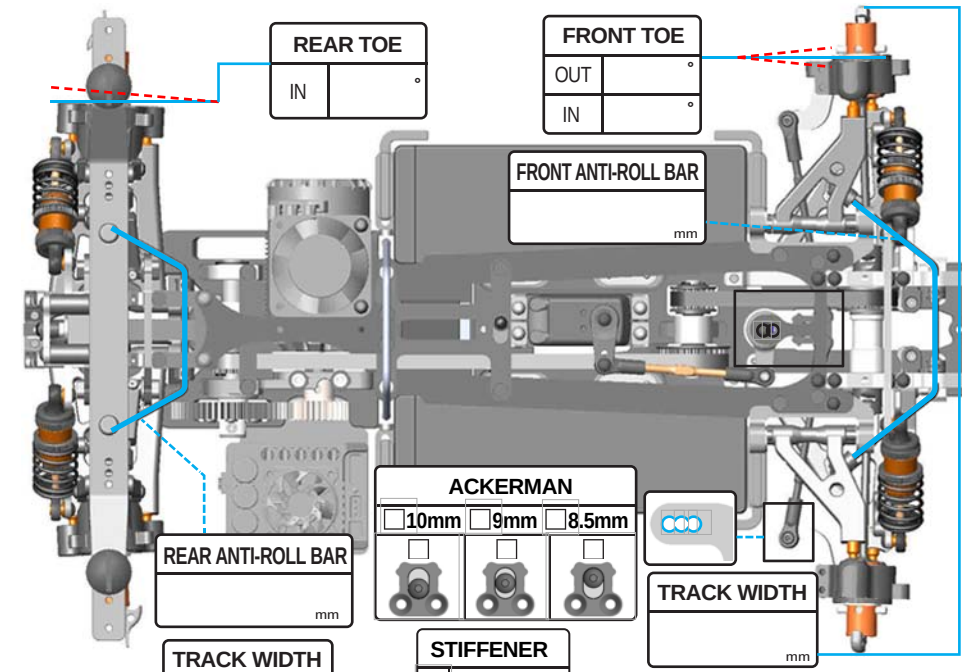

REAR TOE IN °

FRONT TOE OUT ° IN °

FRONT ANTI-ROLL BAR mm

ACKERMAN ☐ 10mm ☐ 9mm ☐ 8.5mm ☐ ☐ ☐

REAR ANTI-ROLL BAR mm

TRACK WIDTH mm

STIFFENER ☐ REMOVED ☐ R828004

TRACK WIDTH mm