# RB4ES SET-UP SHEET ARC

RACE
TRACK
DRIVER
CITY
DATE

| TEMPERATURE | AIR | TRACK |
|---|---|---|
| | | |

| QUALIFYING POSITION | BEST LAPTIME (SEC) | FINAL POSITION | RACE LENGTH (MIN) |
|---|---|---|---|
| | | | |

TRACK CONDITION ☐ TECHNICAL ☐ MIXED ☐ FAST
TRACTION ☐ LOW ☐ MEDIUM ☐ HIGH

## GEAR RATIO CHART

| Spur / Pinion | 56 | 57 | 58 | 60 | 61 | 62 |
|---|---|---|---|---|---|---|
| 22 | ☐ 6.11 | ☐ 6.22 | ☐ 6.33 | ☐ 6.55 | ☐ 6.65 | ☐ 6.76 |
| 23 | ☐ 5.84 | ☐ 5.95 | ☐ 6.05 | ☐ 6.26 | ☐ 6.37 | ☐ 6.47 |
| 24 | ☐ 5.60 | ☐ 5.70 | ☐ 5.80 | ☐ 6.00 | ☐ 6.10 | ☐ 6.20 |
| 25 | ☐ 5.38 | ☐ 5.47 | ☐ 5.57 | ☐ 5.76 | ☐ 5.86 | ☐ 5.95 |
| 26 | ☐ 5.17 | ☐ 5.26 | ☐ 5.35 | ☐ 5.54 | ☐ 5.63 | ☐ 5.72 |
| 27 | ☐ 4.98 | ☐ 5.07 | ☐ 5.16 | ☐ 5.33 | ☐ 5.42 | ☐ 5.51 |
| 28 | ☐ 4.80 | ☐ 4.89 | ☐ 4.97 | ☐ 5.14 | ☐ 5.23 | ☐ 5.31 |
| 29 | ☐ 4.63 | ☐ 4.72 | ☐ 4.80 | ☐ 4.97 | ☐ 5.05 | ☐ 5.13 |
| 30 | ☐ 4.48 | ☐ 4.56 | ☐ 4.64 | ☐ 4.80 | ☐ 4.88 | ☐ 4.96 |

## SHOCK

| Front | | Rear |
|---|---|---|
| | OIL | |
| | SPRING | |
| | PISTON | |


## TIRE

| Front | | Rear |
|---|---|---|
| Front Left ° / Front Right ° | Tire Shore | Rear Left ° / Rear Right ° |
| Front Left mm / Front Right mm | Tire Ø | Rear Left mm / Rear Right mm |
| | Tire Additive | |

## BODY

Bumper: ☐ Standard ☐ Cut


BODY MOUNT DISTANCE: mm

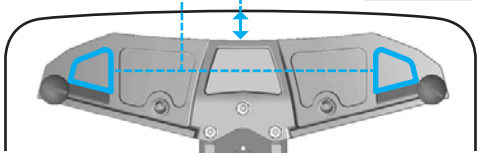

BODY | WING mm


## NOTE

WHEEL BASE: mm mm
BUMP STEER: mm
CASTER: mm

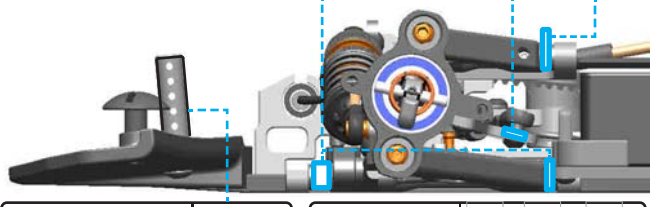


TOWER POSITION: mm
FRONT ARM: ☐ S ☐ M ☐ H

REAR UPRIGHTSHIMS: mm




STEERING BLOCK SETUP



CENTER R806021 | CENTER | BACKWARD | FORWARD | LOWER | UPPER

ECCENTER HUB




☐ Up ☐ Middle ☐ R806021


REAR ARM: ☐ S ☐ M ☐ H

## FRONT

RIDE HEIGHT: mm

FRONT UPPER ARM




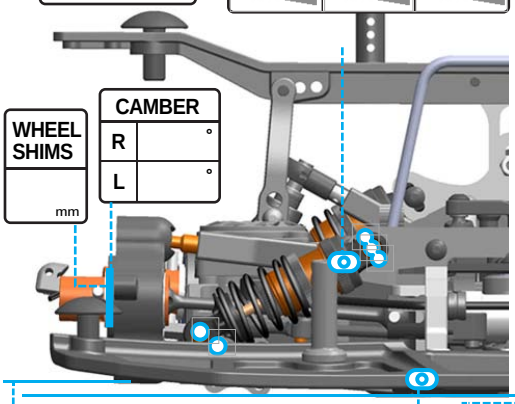


CAMBER: R ° / L °
WHEEL SHIMS: mm

DOWN STOP: mm


FRONT LOW ARM



REAR ROLL CENTER




I-TYPE




## REAR

1 HOLE
2 HOLES: ☐ INSIDE
2 HOLES: ☐ OUTSIDE
RIDE HEIGHT: mm

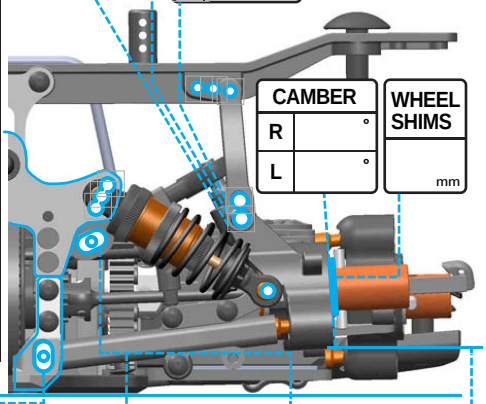


CAMBER: R ° / L °
WHEEL SHIMS: mm

REAR UPPER LINK



DOWN STOP: mm

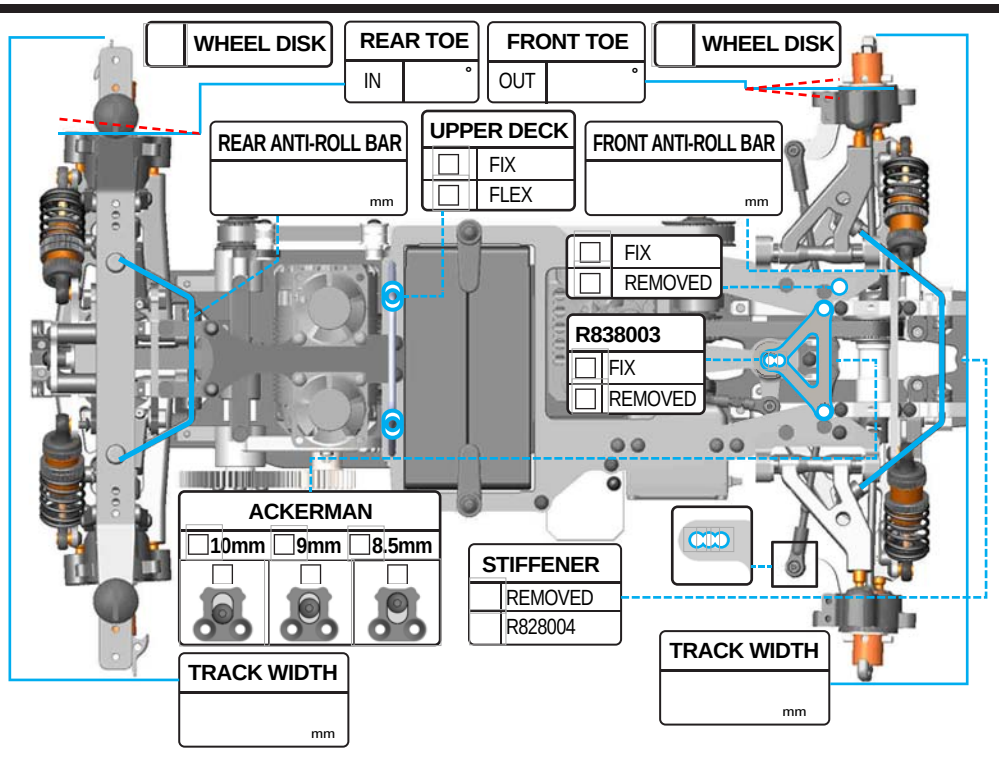

WHEEL DISK
REAR TOE: IN °
FRONT TOE: OUT °
WHEEL DISK

REAR ANTI-ROLL BAR: mm

UPPER DECK: ☐ FIX ☐ FLEX

FRONT ANTI-ROLL BAR: mm

☐ FIX ☐ REMOVED

R838003: ☐ FIX ☐ REMOVED

ACKERMAN: ☐ 10mm ☐ 9mm ☐ 8.5mm

STIFFENER: ☐ REMOVED ☐ R828004

TRACK WIDTH: mm

TRACK WIDTH: mm