ECLIPSE 2 SETUP SHEET

DRIVER DETAILS

NAME	
DATE	
EVENT	
LOCATION	
RACE RESULT	
QUALIFYING POSITION	
FASTEST LAP TIME	

TRACK CONDITIONS

GRIP LEVEL	High ☐	Medium ☐	Low ☐
TYPE	Tight ☐	Mixed ☐	Open ☐
SURFACE	Asphalt ☐	Carpet ☐	
CONDITION	Smooth ☐	Bumpy ☐	
TRACK DIMENSIONS			
TEMPERATURE	°C	°F	


MOTOR & GEARING

MOTOR	
MOTOR OPTIONS	
ROTOR DIAMETER	
TIMING	
SPUR GEAR SIZE	
PINION SIZE	
ROLLOUT	mm / rev

TYRES & ADDITIVE

	Front	Rear
COMPOUND		
FOAM DIAMETER	mm	mm
TYRE ADDITIVE		
ADDITIVE TIME	min	min
ADDITIVE COVERAGE	%	%
SIDEWALL GLUE		

TOP DESK STIFFNESS ADJUSTMENT

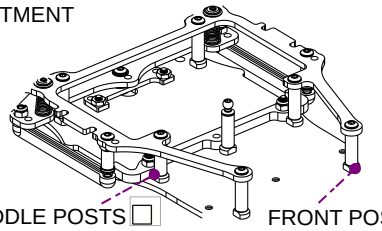


MIDDLE POSTS ☐ FRONT POSTS ☐

ELECTRONICS & BODYSHELL

BODYSHELL				HEIGHT		mm
FRONT PIN HEIGHT Bottom	0 ☐	1 ☐	2 ☐	3 ☐	4 ☐	Top
FRONT HANGERS	1DOT ☐		2DOT ☐		3DOT ☐	
REAR HANGERS	1DOT ☐		2DOT ☐		3DOT ☐	
E.S.C						
SERVO						
RECEIVER						
BATTERY						

FRONT

CAMBER	0.75° ☐	1.5° ☐	☐
RIDE HEIGHT			mm
TOE			°
DAMPING			cSt
DROOP			mm
CASTER	WASHER A (REAR)	mm	ANGLE
	WASHER B (FRONT)	mm	

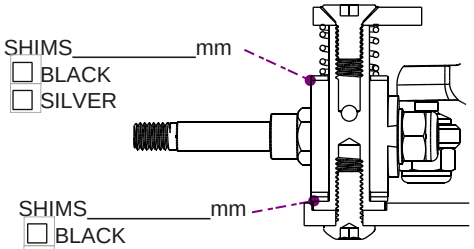

SHIMS_____mm
☐ BLACK
☐ SILVER

SHIMS_____mm
☐ BLACK
☐ SILVER


FRONT SPRINGS


☐ BLACK - SOFT
☐ SILVER - MEDIUM
☐ GOLD - HARD
☐ WHITE - ULTRA

☐ _____

REAR

RIDE HEIGHT		mm
ROLL DAMPING		cSt
BUMP DAMPING		cSt
DROOP		mm
ANTI SQUAT	KIT ☐	☐
DIFF PRELOAD	360° KIT ☐	° ☐
PIVOT LENGHT	LONG ☐	SHORT ☐

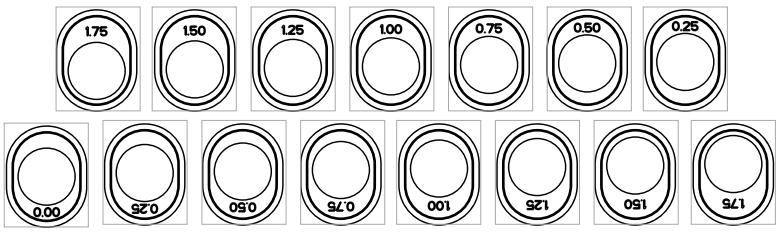

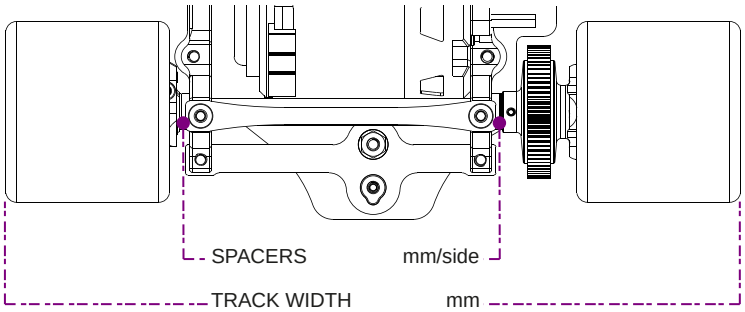

SPACERS mm/side

TRACK WIDTH mm

ROLL SPRINGS (SIDE):_____
☐ ☐ ☐ ☐

BUMP SPRING (CENTRE):_____
☐ ☐ ☐ ☐

SOFTER ◄ ► HARDER
U4838 BLACK - U4839 SILVER - U4840 GOLD - U4841 NICKEL

NOTES

Alterations: Arn0 / PetitRC.com