


SETUP SHEET


www.bmt-team.com

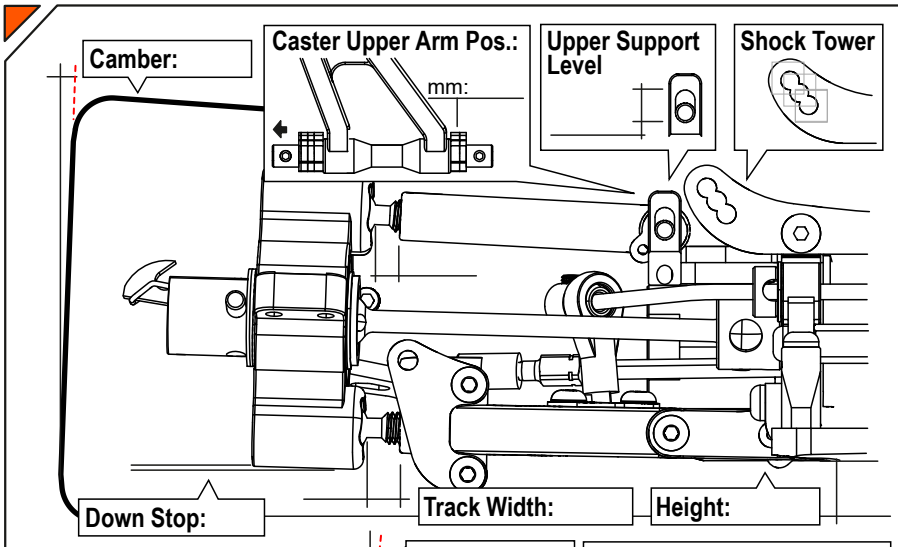


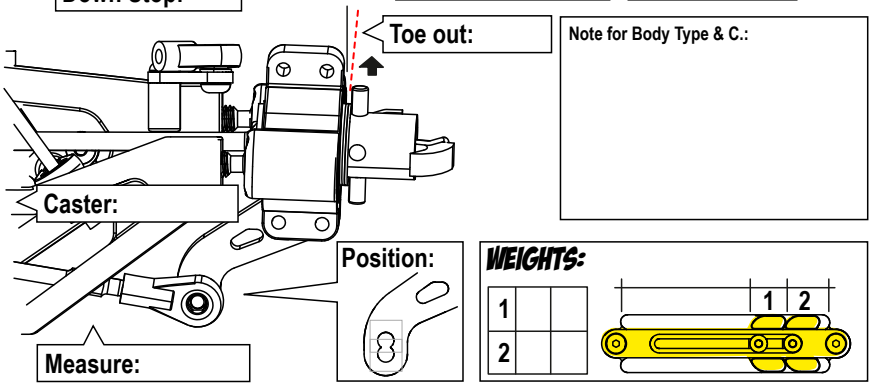

Note for Body Type & C.:

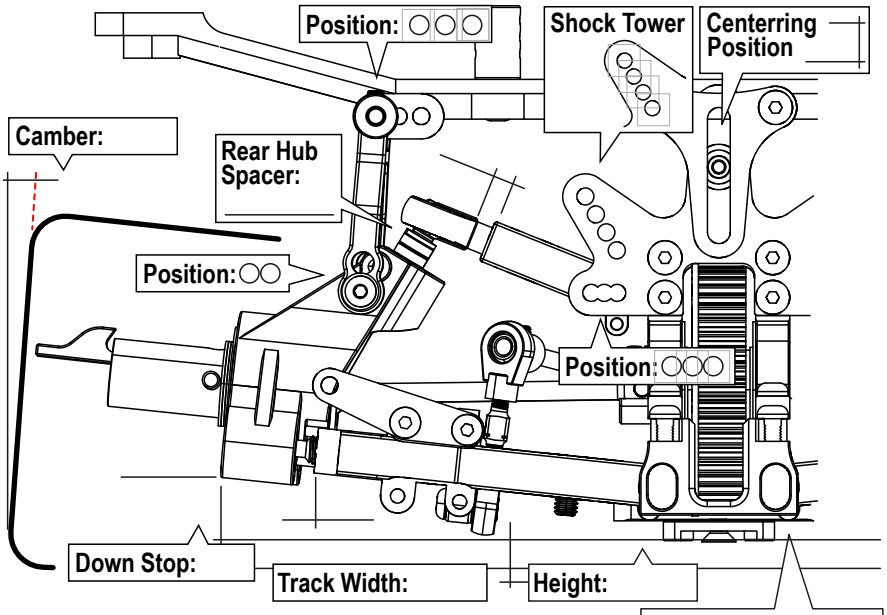

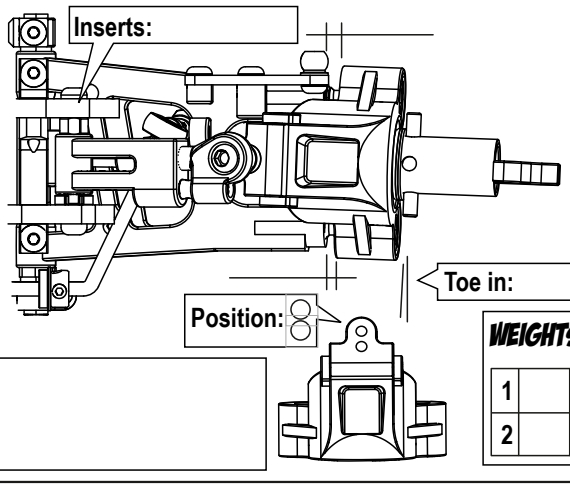



Inserts: IN OUT

DRIVER:

DATE:

TRACK:

SURFACE: ☐ Smooth ☐ Rough

TRACTION: ☐ Low ☐ Medium ☐ High

LAYOUT: ☐ Slow ☐ Mixed ☐ Fast

POWERTRAIN

TYPE
FUEL
GLOW PLUG
PIPE / MANIFOLD

CLUTCH SETTINGS

SHOE/BELL
CLEARANCE (mm)
AXIAL PLAY (mm)
SPRING
TENSION (mm)

TYRES

FRONT		BRAND	REAR	
LEFT	RIGHT		LEFT	RIGHT
		SHORE		
		DIAMETER START		
		DIAMETER STOP		

SHOCK ABSORBERS

FRONT	REAR
PISTON	PISTON
OIL	OIL
SPRING	SPRING

FRONT - ANTI ROLL BAR

2,1 ☐ 2,3 ☐ 2,5 ☐ opt:

REAR - ANTI ROLL BAR

2,6 ☐ 2,8 ☐ 3,0 ☐ opt:

SERVO SAVER POSITION

_____mm ☐ FRONT ☐ REAR

PINION 1ST: ☐ 18T ☐ 19T ☐ 20T

PINION 2ND: ☐ 23T ☐ 24T ☐ 25T

SPUR 1ST: ☐ 59T ☐ 60T ☐ 61T

SPUR 2ND: ☐ 55T ☐ 56T ☐ 57T

Arno