1/10 SCALE 2WD BUGGY

HYPER H2

SETUP SHEET


HoBAO

Name: **Date:**

Event: **Track:**

Track Conditions

- ☐ Smooth ☐ Hard Packed ☐ Blue Grove ☐ Wet
- ☐ Rough ☐ Loose ☐ Dry ☐ Dusty
- ☐ Grass ☐ Low Traction ☐ High Traction Temp _____ °C/°F
- ☐ Astro Turf ☐ Med Traction ☐ Other _____

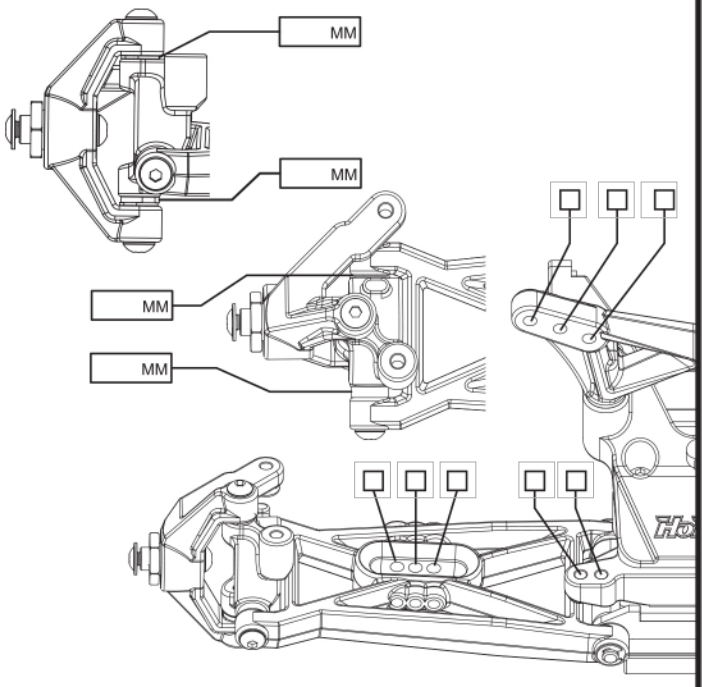

Front Suspension

Toe: _____

Ride Height: _____

Camber: _____

Caster: ☐ 30° ☐ 35°

Kick Angle: ☐ 20° ☐ 25°


Shock Oil: _____

Piston: _____

Spring: _____

Bump Steer Spacer: _____

Rear Suspension

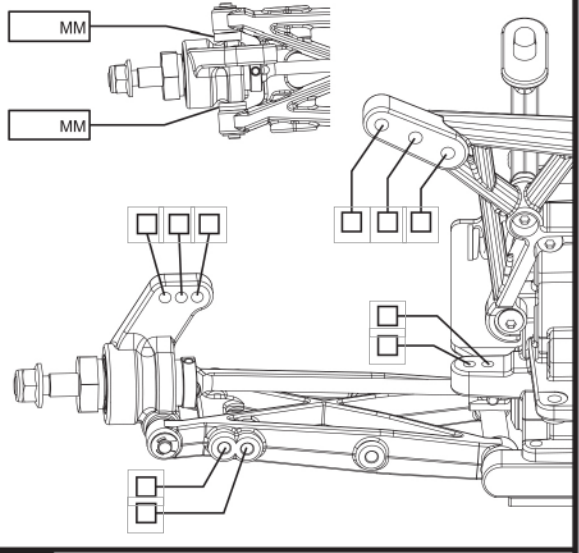

Chassis Configuration: ☐ Rear Motor ☐ Mid Motor

Toe: _____

Anti-Squat: ☐ 1° ☐ 2° ☐ 3°

Ride Height: _____

Camber: _____

Wheelbase: _____

Sway Bar: _____

Shock Oil: _____

Piston: _____

Spring: _____

Differential: ☐ Ball ☐ Gear Fluid: _____

Battery Position: _____

Front Tires

Tire: _____

Compound: _____

Insert: _____

Wheel: _____

Rear Tires

Tire: _____

Compound: _____

Insert: _____

Wheel: _____

Electronics

Radio: _____

Servo: _____

ESC: _____

Intial Brake: _____

Drag Brake: _____

Throttle Profile: _____

Timing Advance: _____

Throttle/Brake Expo: _____

Servo Expo: _____

Throttle/Brake EPA: _____

Motor: _____

Pinion: _____ Spur: _____

Battery: _____

Notes

Editable: Arn0 at PetitRC.com