HONG NOR

iX5B SETUP SHEET

NAME: _____ TRACK COMPOSITION: _____

DATE: _____ LAYOUT: ☐ TIGHT ☐ MIXED ☐ TECHNICAL

RACE: _____ TRACTION: ☐ LOW ☐ MEDIUM ☐ HIGH

TRACK: _____ SURFACE: ☐ SMOOTH ☐ BUMPY

AIR TEMP ☐ °F ☐ °C

LAPS

BEST LAP TIME

in LAP

DIFFERENTIAL OIL

FRONT	CENTER	REAR
☐ STD	☐ STD	☐ STD

GEARING

SPUR GEAR T

PINION GEAR T

TIRES

FRONT TYPE

COMPOUND

INSERT FOAM

REAR TYPE

COMPOUND

INSERT FOAM

ELECTRIC MOTOR

TURN /

RPM

KV


BRAND

ELECTRIC SPEED CONTROLLER

BRAND

TYPE

FRONT

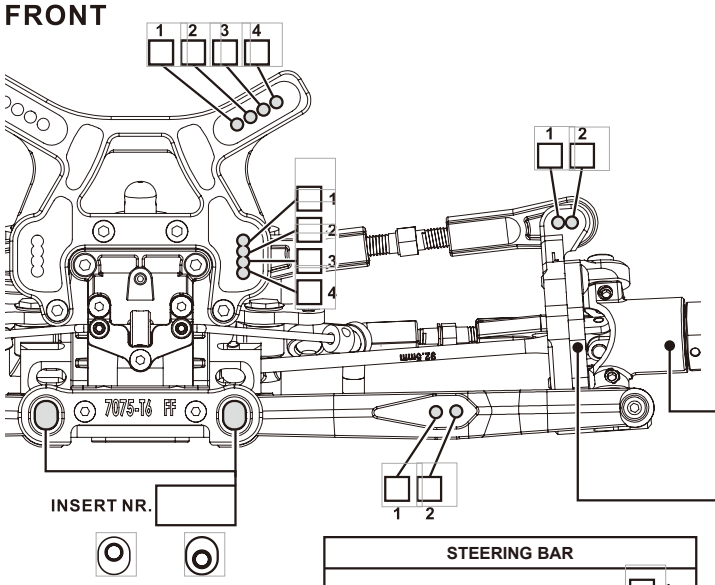


RIDE HEIGHT mm

SWAY BAR mm

CAMBER ANGLE °

TOE ANGLE °


☐ PLASTIC ☐ ALUM




STEERING BLOCK ☐ +2° ☐ +4°

FRONT SPINDLE CARRIERS CASTER ☐ 15° ☐ 17.5° ☐ 20°

STEERING BAR

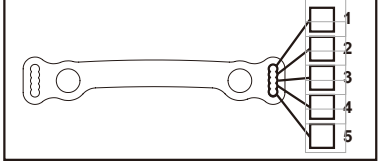

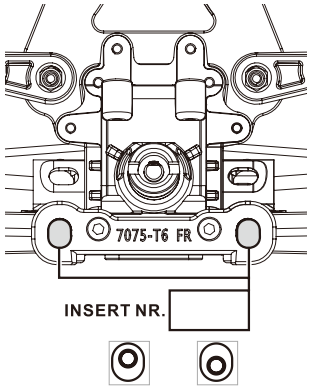


SHOCK

	FRONT
SHOCK LENGTH	mm
OIL wt.	
PISTON	mm
SPRING	



REAR

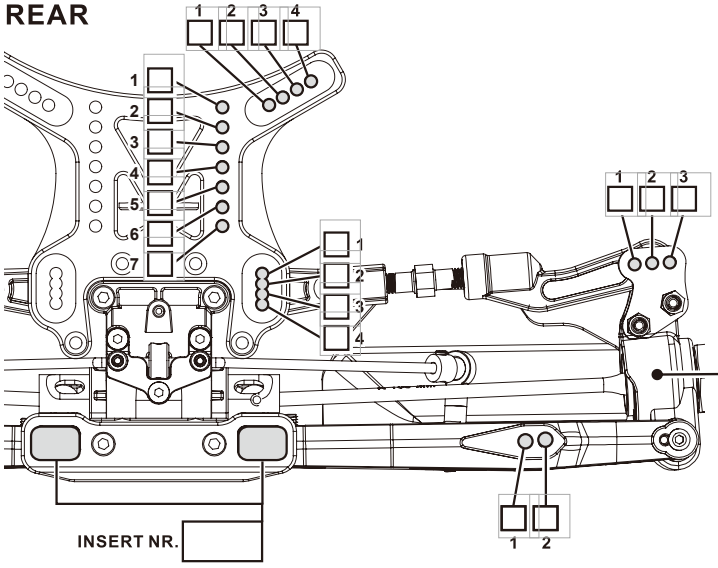


RIDE HEIGHT mm


SWAY BAR mm


CAMBER ANGLE °

☐ PLASTIC ☐ ALUM



WHEEL HUB ☐ PLASTIC ☐ ALUM

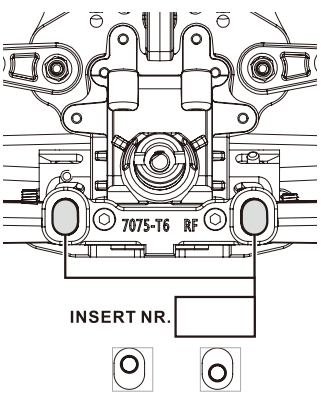




REAR HUB BUSHING

WHEELBASE SHIMS ☐ 0mm ☐ 2mm ☐ 2.5mm ☐ 4.5mm

SHOCK

	REAR
SHOCK LENGTH	mm
OIL wt.	
PISTON	mm
SPRING	



Arn0