

ULTIMA RT5 SET UP SHEET

KYOSHO® THE FINEST RADIO CONTROL MODELS

Name _____ Date _____ Truck / City _____ Event _____

Front Suspension



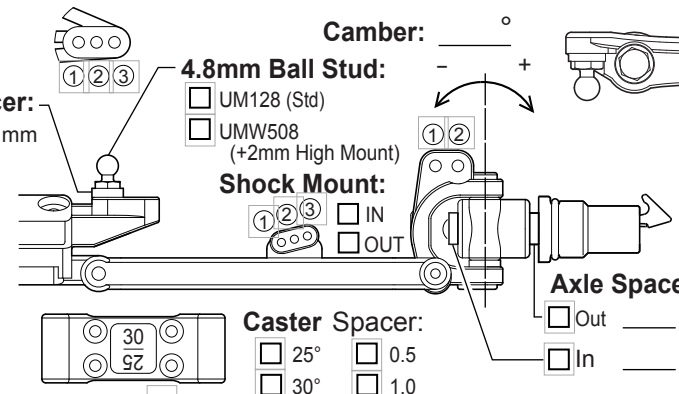

Upper Spacer: ____ mm

4.8mm Ball Stud:
- ☐ UM128 (Std)
- ☐ UMW508 (+2mm High Mount)

Shock Mount: ☐ IN ☐ OUT

Camber: ____ ° (– +)


Ackerman Steer Spacer: ____ mm

4.8mm Ball Stud:
- ☐ LA246 (-1mm Low Mount)
- ☐ UM129 (Std)

Bump Steer Spacer: ____ mm

Axle Spacer:
- ☐ Out ____ mm
- ☐ In ____ mm

Axle Height Spacer:
- ☐ Up
- ☐ Down



Toe: ☐ In ☐ Out ____ °

Front Bulkhead Weight Placement:
- ☐ None
- ☐ Bulkhead Inside ____ oz ____ g
- ☐ On the skid plate ____ oz ____ g * 1oz=28g


Sus Mount: ☐ UM503 ☐ UM567

Caster Spacer:
- ☐ 25° ☐ 0.5
- ☐ 30° ☐ 1.0
- ☐ None

Wheelbase: ☐ Long ☐ Middle ☐ Short


Comments: _____

Rear Suspension

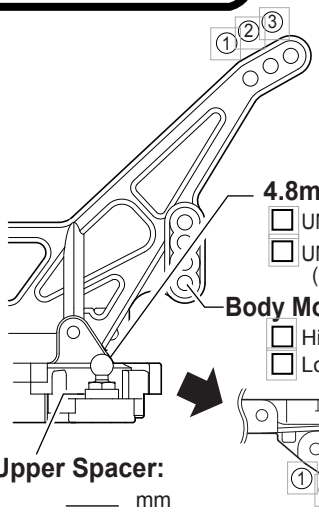


Sus Holder Spacer:
F ☐ 0.5 ☐ 1.0 ☐ None
R ☐ 0.5 ☐ 1.0 ☐ None

Anti-Squat: ____ °



Upper Spacer: ____ mm




Wheelbase:
F: ____ mm
R: ____ mm

4.8mm Ball Stud:
- ☐ UM128 (Std)
- ☐ UMW508 (+2mm High Mount)

Body Mount Position:
- ☐ High
- ☐ Low

Sway Bar: ☐ None ☐ ____mm

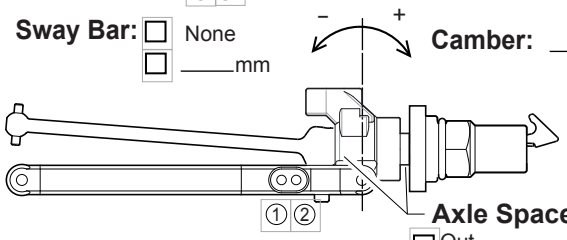

Camber: ____ ° (– +)

Rear Hub add Toe:
- ☐ 0°Type-B (UM519)
- ☐ 0°Type-B2 (UM519-2)
- ☐ 0°Alu (UMW516-0)
- ☐ 0.5°Alu (UMW516-05)
- ☐ 1°Alu (UMW516-1)

Axle Spacer:
- ☐ Out ____ mm
- ☐ In ____ mm

Lower Sus Holder:

	Normal	Aluminum(Opt)
Narrow	☐ RF	☐ UMW511+UMW512
Wide	☐ RF2	☐ UMW514+UMW515

Upper Spacer: ____ mm

Comments: _____


Editable by Arn0 at PetitRC dot com

Diff.

- ☐ Gear Diff. #____
- ☐ Ball Diff.

Shock

	Front	Rear
Shock Piston:	____	____
Shock Oil:	# ____	# ____
Shock Spring:	____	____
Limiters:	in ____ mm out ____ mm	in ____ mm out ____ mm
Shock Length(A):	____ mm	____ mm



Shock Top Type: ☐ Std:RB5 ☐ Low:SC ☐ Std:RB5 ☐ Low:SC

5.8mm Ball End:
Front: ☐ S ☐ M ☐ L
Rear: ☐ S ☐ M ☐ L

Material

- Front Lower Plate: ☐ Nomal ☐ Hard (UMW522)
- Rear Bulkhead: ☐ Nomal ☐ Hard (UMW506)
- Rear Chassis: ☐ Nomal ☐ Hard (UMW505B)
- Servo Saver: ☐ Nomal ☐ Hard (LA221HB)
- Pinion Gear: ☐ Steel ☐ Aluminium
- Shock Ring: ☐ O-ring ☐ X-ring ☐ Red ☐ Clear

Body / Wing / Chassis


Wing: ____ Body: ____


Lip hight: ____

Battery Placement: ☐ Front ☐ Rear

Battery Post: ☐ Pla ☐ Alu

Weight Placement: * 1oz=28g





Ride Height: F ____ mm R ____ mm

Tire

	Front	Rear
Tire:	____	____
Inserts:	____	____
Wheel:	____	____
Traction Compound:	____	

Comment :

Electronics

- Motor: ____
- Pinion/Spur: ____
- Battery: ____
- ESC: ____
- Radio: ____
- Servo: ____
- Throttle/Brake:
- EPA: ____ Expo: ____
- Initial brake: ____
- Drag brake: ____
- Throttle profile: ____
- Steering expo: ____
- Steering speed: ____

Ver.1.00