
DF2 Setup Sheet


KYOSHO

Name _____ Date _____ Track _____ Event _____

Front Suspension




Upper Spacer: ____ mm



4.8mm Ball Stud:
- ☐ UM128 (Std)
- ☐ UMW508 (+2mm High Mount)

Camber: ____ °



4.8mm Ball Stud:
- ☐ LA246 (-1mm Low Mount)
- ☐ 97050M (Std)


Ackerman Steer Spacer: ____ mm

4.8mm Ball Stud Spacer: ____ mm

Axle Spacer:
- ☐ Out ____ mm
- ☐ In ____ mm

Wheel Hub: ____ mm


Bump Steer Spacer: ____ mm



Toe: ☐ In ☐ Out ____ °

Tie Rod: _____

Caster:



☐ 25° ☐ 30°

Spacer: ☐ 0.5 ☐ 1.0 ☐ None

Caster Block: ☐ 0° ☐ 2° ☐ 4°

Caster Block position: ☐ IN (wide/Std) ☐ OUT (Narrow)

Axle Height Spacer: ☐ ___mm ☐ ___mm

Front Bulkhead Weight Placement:
- ☐ None
- ☐ Bulkhead Inside ____ oz ____ g
- ☐ On the skid plate ____ oz ____ g

*1oz=28g


- ☐ A (UM502)
- ☐ B (UM721/Std)
- ☐ C (UM567)

Front Axle: ☐ UM569 (RB6) ☐ UM506 (RB5)

Comments: _____


Wheelbase: F:____mm R:____mm

Rear Suspension




Shock Stay:
- ☐ LA217(SP)
- ☐ LA217H

Spacer: ____ mm



Shock stay hight: ____

Sus. Holder(RF): ☐ IN ☐ OUT _____

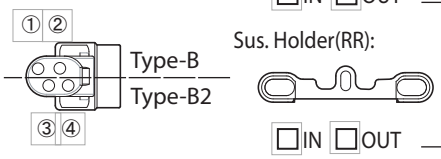


Sus. Holder(RR): ☐ IN ☐ OUT _____

Wing Height:

Type-B / Type-B2

Camber Angle: ____ °


Sway Bar: _____




Ride Height: ____ mm


Sus. Holder Spacer:

Front



Rear





Spacer: ____ mm

Wheel Spacer: ____ mm


Hub Spacer: F: ____ mm R: ____ mm

Rear Sus. Arm:
- ☐ LA272(UM566,UM521)(SP)
- ☐ UM521-1(1-Hole)
- ☐ LA255

Rear Hub add Toe:
- ☐ 0°Type-B(UM519)
- ☐ 0°Type-B2(UM516-2)
- ☐ 0°Alu(UMW516-0)
- ☐ 0.5°Alu(UMW516-05)
- ☐ 1°Alu(UMW516-1)

Shock

	Front	Rear
Shock Piston:	_____	_____
Shock Oil:	# _____	# _____
Shock Spring:	_____	_____
Limiters:	in ____ mm out ____ mm	in ____ mm out ____ mm
Shock Length(A):	_____ mm	_____ mm



A

Shock Top Type: ☐ Std:RB5 ☐ Low:ZX5FS ☐ Std:RB5 ☐ Low:ZX5FS

5.8mm Ball End:
- Front: S ☐ M ☐ L ☐
- Rear: S ☐ M ☐ L ☐

Tires

	Front	Rear
Tire:	_____	_____
Inserts:	_____	_____
Wheel:	_____	_____

Traction Compound: _____

Body/Wing/Other

Body: _____

Wing: _____

Lip hight: _____

Wing Angle: 4° ☐ 7° ☐ 10° ☐

Battery Post: ☐ Pla ☐ Alu

Slipper Type:
- ☐ Direct
- ☐ Separates

Slipper Sheet(F-R):
- ☐ Red-White
- ☐ Red-Red
- ☐ White-White

Center Post: ☐ Pla ☐ Alu

Back bone screw: ☐ F ☐ R

Comments

Electronics

Editable by Arn0 at Petitrc.com

Motor: _____

Pinion/Spur: _____

Battery: _____

ESC: _____

Radio: _____

Servo: _____

Throttle/Brake:

EPA: _____ Expo: _____

Initial brake: _____

Drag brake: _____

Throttle profile: _____

Steering expo: _____

Steering speed: _____

- ☐ Smooth
- ☐ Bumpy
- ☐ Low Traaction
- ☐ Med. Traction
- ☐ High Traction
- ☐ Blue Groove
- ☐ Clay
- ☐ Sandy
- ☐ Soft Dirt
- ☐ Grass
- ☐ Wet
- ☐ Dry
- ☐ Dusty
- ☐ _____

Spring

Soft ↑	Pink
	White
	Gold
	Red
	Yellow
	Orange
↓ Hard	Green

Sway Bar

1.0	White
1.1	Pink
1.2	Red
1.3	Orange
1.4	Yellow
1.5	Blue
1.6	Green