
ULTIMA RB7SS Setup Sheet

KYOSHO THE FINEST RADIO CONTROL MODELS

Name _____ Date _____ Track / City _____ Event _____

Front Suspension




Shock Stay:
- ☐ UM707(Std.)
- ☐ UMW739 Carbon
- ☐ UMW744 Wing
- ☐ UMW747 Wing Mount

Toe: ☐ In ☐ Out ____°


Tie Rod: _____

Sway Bar: ☐ _____ mm

Front Bulkhead Weight Placement:
- ☐ None
- ☐ Bulkhead Inside ____ oz / g
- ☐ On the skid plate ____ oz / g



Upper Spacer: ____ mm

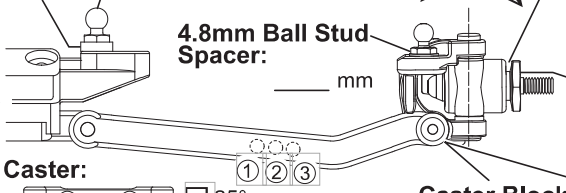

4.8mm Ball Stud:
- ☐ UM128(Std.)
- ☐ UMW508 (+2mm High Mount)

Camber: ____° (– / +)

4.8mm Ball Stud Spacer: ____ mm


Caster:
- ☐ 25°
- ☐ 30°

Spacer:
- ☐ A (UM502)
- ☐ B (UM721/Std)
- ☐ C (UM567)
- ☐ B(UMW722/Brass)
- ☐ B(UMW723/Alu)

Caster Block:
- ☐ 0.5 ☐ 0°
- ☐ 1.0 ☐ 2° ☐ IN (wide/Std)
- ☐ None ☐ 4° ☐ OUT (Narrow)

Caster Block Position:

AL. Steering Support:
- ☐ None
- ☐ UMW724




4.8mm Ball Stud:
- ☐ LA246 (-1mm Low Mount)
- ☐ 97050M (Std.)

Ackerman Steer Spacer: ____ mm
- ☐ UMW701 Aluminum ST Plate
- ☐ UMW702 Aluminum Crank Arm

Axle Spacer:
- ☐ Out ____ mm
- ☐ In ____ mm

Wheel Hub:
- ☐ UM758(Std.)
- ☐ UM506
- ☐ UM506

Axle Height Spacer:
- ☐ ____ mm
- ☐ ____ mm



Bump Steer Spacer: ____ mm


Knuckle:
- ☐ UM763(std.)
- ☐ UM714

Comments: _____

Wheelbase: F: ____ mm R: ____ mm

Rear Suspension


Shock Stay :
- ☐ Std.
- ☐ UMW740



Sus Holder Spacer:

F	R
☐ 0.5	☐ 0.5
☐ 1.0	☐ 1.0
☐ None	☐ None


Anti-Squat: ____°



Type-B (UM519)

Type-B2 (UM519-2)

Upper Spacer: _____ mm



Wheelbase:
F : _____ mm
R : _____ mm

Camber: ____° (– / +)


Sway Bar: ☐ _____ mm

Wheelbase:
F : _____ mm
R : _____ mm


Wing Stay :



4.8mm Ball Stud:
- ☐ UM129
- ☐ UMW508 (+2mm High Mount)
- ☐ 97050M
- ☐ UM128(Std.)



Upper Spacer: ____ mm

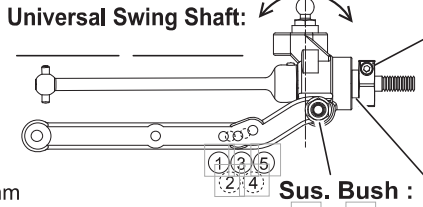


Universal Swing Shaft: _____ _____


Drive Hub :
- ☐ 4mm (TFW113)
- ☐ 4.5mm (LAW30GM)
- ☐ 5.2mm (UMW523)
- ☐ 6.2mm (UM773/Std.)

Rear Hub Carrier :
- ☐ 0°Type-B (UM519)
- ☐ 0°Type-B2 (UM519-2)
- ☐ 0° Alu (UMW704-0)
- ☐ 0.5°Alu (UMW704-05)
- ☐ 1°Alu (UMW704-1)

RR:



Mid:



Lower Sus. Holder:

Plastic
- ☐ RF ☐ RF2L
- ☐ RF2

Option
- ☐ UMW511GM (RF/Alu)

Sus. Bush :
- ☐ In ☐ Out / Std.

(Opt/Adjustable) Block
- ☐ UMW705(RF/Alu) _____
- ☐ UMW725(RF-MID/Bra) _____

(Opt/Adjustable)
- ☐ UMW706(RR-RWD) _____
- ☐ UMW707(RR-MID) _____

Axle Spacer:
- ☐ Out ____ mm
- ☐ In ____ mm

Toe : _____°


Diff.

☐ Gear Diff. # _____

☐ Ball Diff. ☐ Steel ☐ Aluminum

Shock

	Front	Rear
Shock Piston:	_____	_____
Shock Oil:	# _____	# _____
Shock Spring:	_____	_____
Limiters:	in ____ mm ____ out ____ mm	in ____ mm ____ out ____ mm
Shock Length(A):	_____ mm	_____ mm
O-ring :	_____	_____




Shock Top : ☐ Alu.(UM719) ☐ UM753-1B(Std.)

Ball End :
- Front: ☐ S ☐ M ☐ L
- Rear: ☐ S ☐ M ☐ L

Spring Sheet :
- Front: ☐ Std. ☐ Low
- Rear: ☐ Std. ☐ Low

Battery Placement:


Foam:
- ☐ Front
- ☐ Rear
- ☐ None



Transmission

- ☐ Rear Motor
- ☐ Mid-Ship 3 Gear
- ☐ Mid-Ship 4 Gear
- ☐ Mid-Ship Laydown
  - ☐ Direct Gear
  - ☐ Slipper Clutch

Chassis

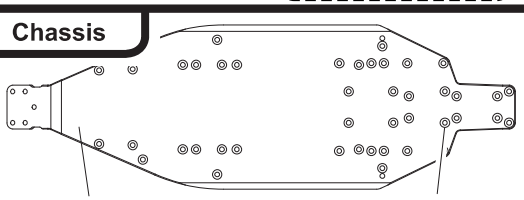

F _____ mm Ride Height: R _____ mm

Battery Type

- ☐ Straight
- ☐ Separate
- ☐ Short ☐ LCG

_____

Tire

	Front	Rear
Tire:	_____	_____
Inserts:	_____	_____
Wheel:	_____	_____


Traction Compound or comment:

Truck Condition

- ☐ Smooth
- ☐ Bumpy
- ☐ Low Traction
- ☐ Med. Traction
- ☐ Higt Traction
- ☐ Wet
- ☐ Dry
- ☐ Sandy
- ☐ Soft Dirt
- ☐ Grass
- ☐ Blue Groove
- ☐ Clay
- ☐ Dusty
- ☐ Carpet
- ☐ _____

Rear Wing

- ☐ UM767/Std.
- ☐ Step 3.0 - Straight
- ☐ Step 3.0 - Round
- ☐ Other _____



____ mm

Lip: ____ mm

Other

Servo : _____

Motor : _____

ESC : _____

Pinion / Spur : _____

NOTES

PetitRC.com