LAZER ZX7 SETUP SHEET

KYOSHO
THE FINEST RADIO CONTROL MODELS


Name _____ Date _____ Track / City _____ Event _____

Front Suspension


Shock Position:



Upper Arm Position:




4.8mm Ball Stud:
- ☐ UM129 (Std)
- ☐ 97050M



Upper Spacer: _____ mm

Camber: _____ °

Bump Steer Spacer: _____ mm




Toe:
- ☐ In
- ☐ Out _____ °

Sway Bar:
- ☐ None
- ☐ _____ mm

Shock Stay:
- ☐ Std.
- ☐ Carbon (LAW58)
- ☐ _____

Spacer: _____ mm

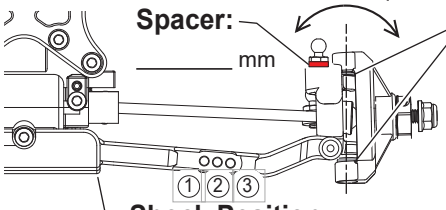

Axle-Height Spacer:
- ☐ Up
- ☐ Down

Caster Block:
- ☐ 7°
- ☐ 10°
- ☐ 13°

Ackerman Spacer: _____ mm



Lower Sus Holder Block:
Front _____ Rear _____

Lower Sus Holder Spacer:
Front _____ mm Rear _____ mm

Shock Position

Wheelbase: Front _____ mm
Rear _____ mm

Sus Bushing
- ☐ Wide
- ☐ Narrow (STD)


Comments

Front Diff


- ☐ Gear _____
- ☐ Ball _____

Rear Suspension


Shock Position:



Upper Arm Position:



4.8mm Ball Stud:
- ☐ 97050M (Std)
- ☐ UM129




Upper Spacer: _____ mm

Shock Stay:
- ☐ Std.
- ☐ Carbon (LAW59)
- ☐ _____


Toe In: _____ °

Camber: _____ °

Sus. Arm:
- ☐ LA272
- ☐ UM713B
- ☐ UM762(Std)

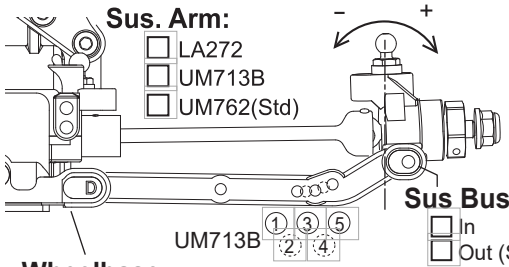


Hub Carrier:



Type-B (UM519)
Type-B2 (UM519-2)

- ☐ 0°Type-B(UM519)
- ☐ 0°Type-B2(UM519-2)
- ☐ 0°Alu(UMW704-0)
- ☐ 0.5°Alu(UMW704-05)
- ☐ 1°Alu(UMW704-1)

Upper Spacer: _____ mm



Sway Bar:
- ☐ None
- ☐ _____ mm

Wing Stay Position

Lower Sus Holder Block:
Front _____ Rear _____


Lower Sus Holder Spacer:
Front _____ mm Rear _____ mm

UM713B

Sus Bushing
- ☐ In
- ☐ Out (Std)

Wheelbase:
Front _____ mm
Rear _____ mm

Shock Position



① ② LA272

Wheelbase:
Front _____ mm
Rear _____ mm

Notes

Comments

Center Drive

- ☐ Diff. Gear
- ☐ Slipper Clutch


_____

Rear Diff.

- ☐ Gear _____
- ☐ Ball _____

Shocks

	Front	Rear
Piston:	_____	_____
Oil:	_____	_____
Spring:	_____	_____
Limiters:	in _____ mm out _____ mm	in _____ mm out _____ mm
Length (A):	_____ mm	_____ mm



Top Type: ☐ Alu. (UM719) ☐ UM753-1B (Std)


Ball End:
- Front: ☐ S ☐ M ☐ L
- Rear: ☐ S ☐ M ☐ L

Spring Cup

Front	Rear
☐	☐
☐	☐

Chassis

Centre Bulk
☐ Front (Std) ☐ Rear



Front Ride Height Rear

_____ mm _____ mm

Electronics

Motor: _____
Pinion/Spur: _____
ESC: _____
Radio: _____
Servo: _____

Notes

Tires


	Front	Rear
Tire:	_____	_____
Compound:	_____	_____
Insert:	_____	_____
Wheel:	_____	_____

Notes

Body & Wing

Body: _____

Wing Dam Height: _____ mm



Wing: _____

Wing Angle: ☐ 4° ☐ 7° ☐ 10°

Lip Height: _____ mm

Material

Screw: ☐ Steel ☐ Titamium

Pinion Gear: ☐ Steel ☐ Aluminium

Shock O-Ring: ☐ O-ring ☐ X-ring ☐ Red ☐ Clear

NOTES

Track Condition

Am0 - Petitrc

- ☐ Smooth
- ☐ Bumpy
- ☐ Low Traction
- ☐ Med. Traction
- ☐ High Traction
- ☐ Wet
- ☐ Dry
- ☐ Sandy
- ☐ Soft Dirt
- ☐ Grass
- ☐ Blue Groove
- ☐ Clay
- ☐ Dusty
- ☐ _____