SETUP SHEET

Driver: _____

Date: _____

Track: _____

❑ Indoor ❑ Outdoor ❑ Tight / ❑ Open

❑ Carpet ❑ Concrete ❑ Asphalt

❑ Sealed ❑ Smooth ❑ Rough

FRONT SUSPENSION

Toe ❑ In ❑ Out _____

Ride Height _____

Camber ❑ - ❑ + _____

Caster:
- ❑ Kickup _____
- ❑ Antidive _____
- ❑ Carrier _____

Sway Bar ❑ No ❑ Yes size_____

Droop Height: _____

Pivot Support: _____

Arm Spacing
- ❑ FWD
- ❑ MDL
- ❑ BACK

Front Drive:
- ❑ Diff
- ❑ One-Way
- ❑ Spool

Ackerman Position
- ❑ Forward
- ❑ Back

Camber Ball Stud:
- ❑ (Chrome)
- ❑ (Black)


Pulley
- ❑ Standard 42F 42R
- ❑ Overdrive 41F 42R
- ❑ Underdrive 42F 41R

# of washers under steering/ tie-rod ball studs

Spindle ball stud:_____

Bellcrank ball stud:_____

and size of washers under camber ball stud_____

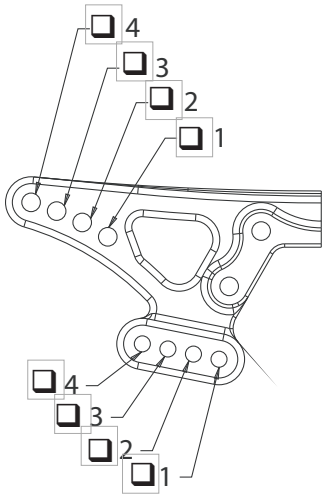

RollCenter:
❑ High ❑ Low
❑ Other _____

Front Shocks
Oil: _____ Shock Length: _____
Piston: _____ ❑ Standard / ❑ Drilled
Spring: _____
Limiters: ❑ Inside _____ ❑ Outside _____

NOTES: _____

REAR SUSPENSION

Toe ❑ In ❑ Out _____

Ride Height _____

Camber ❑ - ❑ + _____

Sway Bar ❑ No ❑ Yes size_____


Droop Height: _____

Pivot Support: _____


and size of washers under camber ball stud_____

Arm Spacing
- ❑ FWD
- ❑ MDL
- ❑ BACK

Camber Ball Stud:
- ❑ (Chrome)
- ❑ (Black)

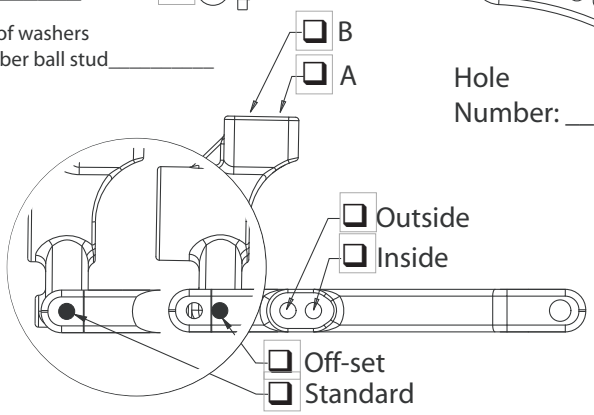

Hole Number: ___

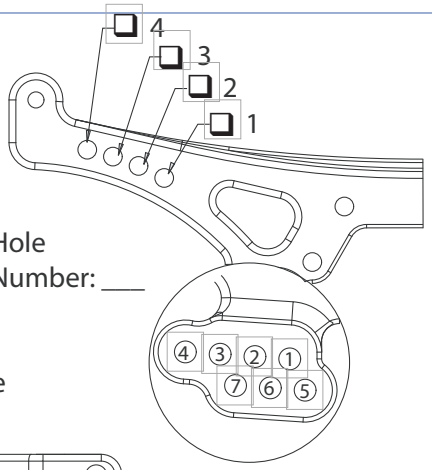

RollCenter:
❑ High ❑ Low
❑ Other _____

Rear Shocks
Oil: _____ Shock Length: _____
Piston: _____ ❑ Standard / ❑ Drilled
Spring: _____
Limiters: ❑ Inside _____ ❑ Outside _____

NOTES: _____

TIRES:

	Compound	Insert	Wheel	Tire Dia.	Vehicle Weight
Front:					
Rear:					

Battery Placement: ❑ Back ❑ Forward ❑ Split: #Fwd___ #Back___ ❑ Tire Additive:_____

Transponder Position: _____

Notes: _____

Motor:_____

Pinion:_____/_____

Spur: _____

Body: _____

Body Height: _____

Wing: _____

Editable by Arn0 at PetitRC.com