XBILITY RC SET-UP SHEET

DRIVER | DATE

QUAL POS. | FINAL POS. | LAPS / TIME | BEST LAPTIME

TRACK

NAME

COMPOSITION ☐ CARPET ☐ RCP

LAYOUT ☐ TECHNICAL ☐ MIXED ☐ FAST

TRACTION ☐ LOW ☐ MEDIUM ☐ HIGH


BODY

MODEL | BUMPER

WING | BODY TYPE


CHASSIS

☐ ALUM ☐ RECEIVER BRASS WEIGHT ☐ STEEL

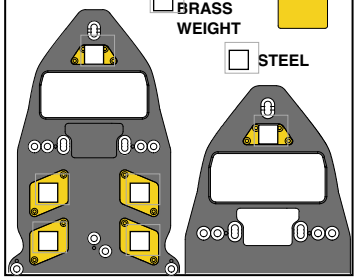

TOTAL FRONT WIDTH

mm

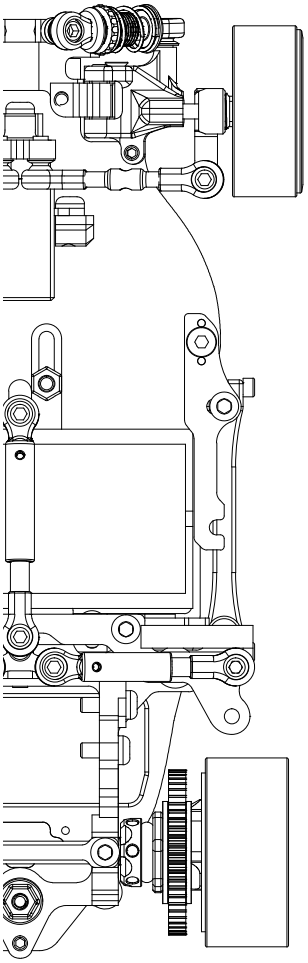

TOTAL REAR WIDTH

mm

ELECTRONICS

MOTOR | SERVO

ESC | BATTERY

BATTERY POSITION ☐ FRONT ☐ CENTER ☐ BACK

COMMENTS

WEIGHTS


BODY WEIGHT | CAR WEIGHT | TOTAL WEIGHT

grs + grs = grs

FRONT % WEIGHT DISTRIBUTION % BACK

FRONT


SHIMS mm | OIL / GREASE

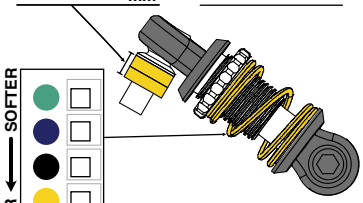

SOFTER / HARDER

CASTER ☐ 0° ☐ 1.5° ☐ 3°

TOE deg | AXLE TRAIL mm

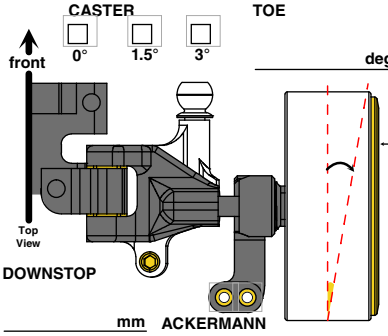


front / Top View

DISCS ☐ SIDE GLUE ☐ NONE ☐

TYRE DIAMETER mm

RIM OFFSET mm model

DOWNSTOP mm | ACKERMANN




FRONT BUCKLE

CAMBER GAIN


CAMBER deg

ROLL CENTER



BUMP STEER mm

STEERING ANGLE deg




HORN ACKERMANN mm

HORN TYPE

MID

SIDE IN SHIMS mm | OIL / GREASE | SIDE OUT SHIMS mm




SIDE DAMPERS

FRONT SHIMS mm | OIL / GREASE | BACK SHIMS mm

PRE-LOAD SHIMS


LINK SHIMS mm

MOUNT ☐ Front ☐ Back

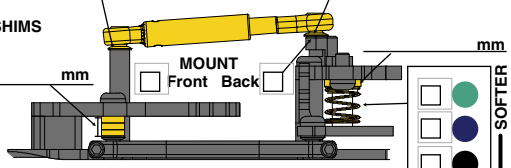

SOFTER / HARDER

HARD-MOUNT SHIMS mm




LINK POSITION

DAMPER POSITION

PIVOT MOUNTING POSITION

PIVOT SHIM ☐ 0mm ☐ 1mm ☐ 2mm

REAR



SOFTER / HARDER

DROOP mm

POD-ANGLE mm

REAR SCREW POSITION

RIDE HEIGHT ECCENTRIC BUSHINGS


+1	+0.8	+0.6	+0.4	+0.2	0	-0.2	-0.4	-0.6	-0.8	-1

TYRE DIAMETER mm model | RIM OFFSET mm model

PINION / GEAR | DIFF TYPE | GREASE

BALL TYPE | LOCK ☐ Soft ☐ Med ☐ Hard

REAR HEIGHT mm

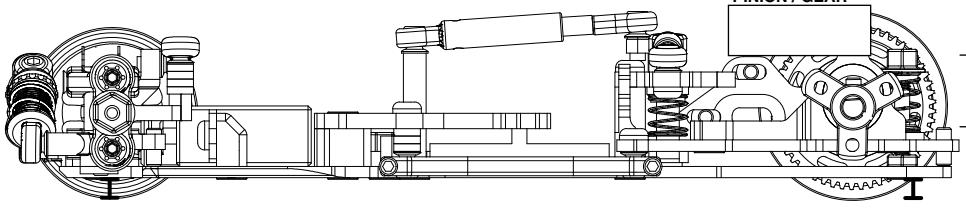

FRONT HEIGHT mm

WWW.XBILITYRC.COM

XBONE