HONG NOR

X5 3 LCG

SETUP SHEET

NAME: _____ TRACK COMPOSITION: _____

DATE: _____ LAYOUT: ☐ TIGHT ☐ MIXED ☐ TECHNICAL

RACE: _____ TRACTION: ☐ LOW ☐ MEDIUM ☐ HIGH

TRACK: _____ SURFACE: ☐ SMOOTH ☐ BUMPY

AIR TEMP ☐ °F ☐ °C

LAPS

BEST LAP TIME

in LAP

DIFFERENTIAL OIL

FRONT	CENTER	REAR
☐ STD	☐ STD	☐ STD

CLUTCH

SHOE BRAND

COMPOUND ☐ ALUM ☐ CARBON

SPRING BRAND

TENSION mm

CLUTCH SHOES SHOE

GEARING

SPUR GEAR T

PINION GEAR T

TIRES

FRONT TYPE

COMPOUND

INSERT FOAM

REAR TYPE

COMPOUND

INSERT FOAM

ENGINE

TYPE

PORT

PLUG


☐ NORMAL ☐ TURBO

HEAD CLEARANCE

PIPE

FUEL BRAND

FRONT

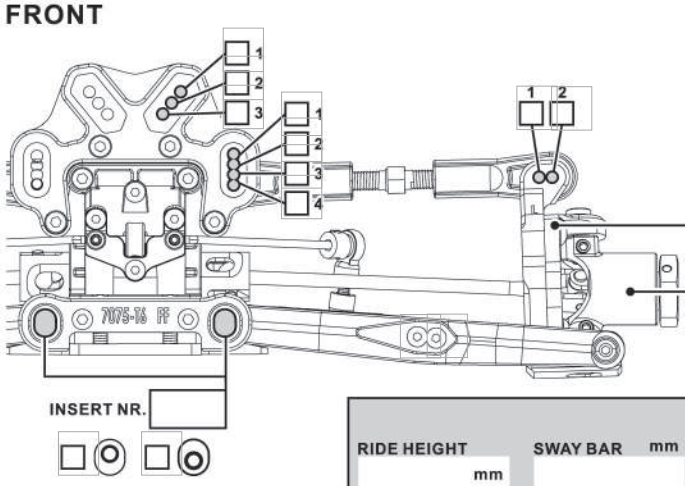

FRONT SPINDLE CARRIERS CASTER ☐ 15° ☐ 17.5° ☐ 20°

STEERING BLOCK ☐ +2° ☐ +4°

INSERT NR.


RIDE HEIGHT mm

SWAY BAR mm

CAMBER ANGLE °


TOE ANGLE °

☐ PLASTIC ☐ ALUM

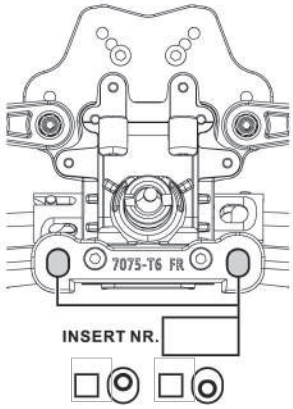

INSERT NR.

STEERING BAR



FRONT SHOCK

SHOCK LENGTH mm


OIL wt.

PISTON mm

SPRING



REAR

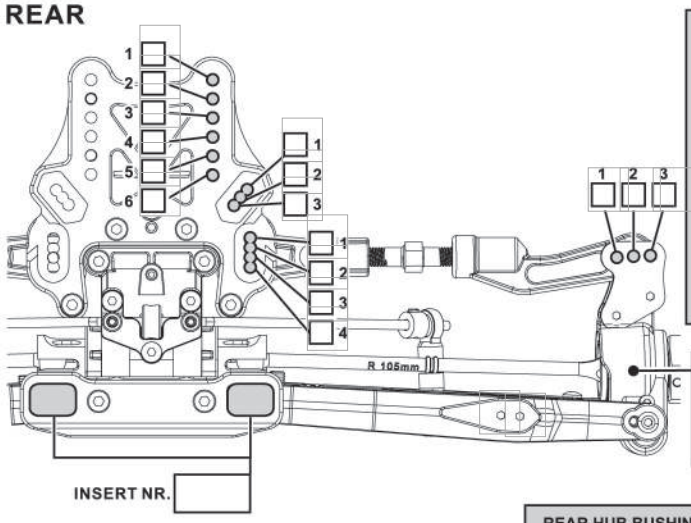

RIDE HEIGHT mm

SWAY BAR mm


CAMBER ANGLE °

☐ PLASTIC ☐ ALUM


WHEEL HUB ☐ PLASTIC ☐ ALUM

INSERT NR.

REAR HUB BUSHING

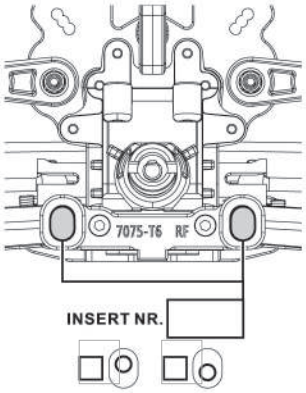

INSERT NR.



WHEELBASE SHIMS ☐ 0mm ☐ 2mm ☐ 2.5mm ☐ 4.5mm

REAR SHOCK

SHOCK LENGTH mm

OIL wt.

PISTON mm

SPRING

