AWESOMATIX A800 MMCX

SETUP SHEET
M. Mächler / Arn0

NAME	Christoph Thiele	DATE 27.01.2019	TEMP. °C AIR / TRACK /
COUNTRY		ASPHALT ☐ (OUTDOOR ☐ INDOOR ☐)	CARPET ☑
RACE	HPI Challenge Bremen	TRACK CONDITION TECHNICAL ☐	MIXED ☑ FAST ☐
TRACK	RC World OHZ Bremen	TRACTION LOW ☑	MEDIUM ☑ HIGH ☐

FRONT

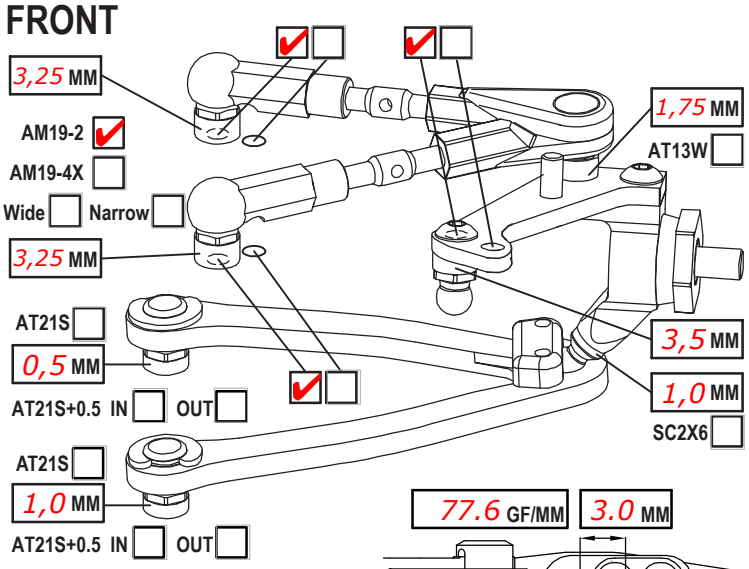

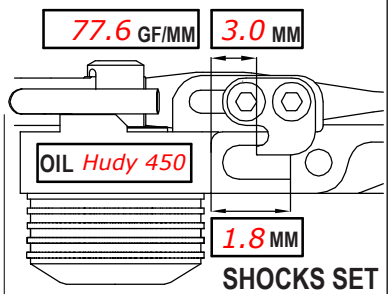

SHOCKS SET

CAMBER ANGLE / °	2	ROTOR	STD ☑ ☐
CASTER ANGLE / °	4	SPRING	STD ☐ S ☑
TOE ANGLE / °	1 pro Seite	DAMPER	D2.2 ☑ ☐
RIDE HEIGHT / MM	5,2	SRS/RHS ARR.	I ☑ II ☐
DOWNSTOP / MM	5,6	PSS SETUP -	MM A ☐ B ☐
UPWNSTOP / MM	-		
STABILIZER Ø / MM	1,2		
LOW ARM C04M1+0.5 ☐	+9 ☑		
STEER. ARM AM14LS ☑	☐		
WHEEL SPACER / MM	-		

FRONT DRIVE SPOOL ☑ GB2B ☐ LOW ☑ HIGH ☐

DIFF. OIL | DIFF WASHERS

DOGBONE DRIVE ST02 ☑ | WHEELHUB AM06WL ☑ ☐

REAR

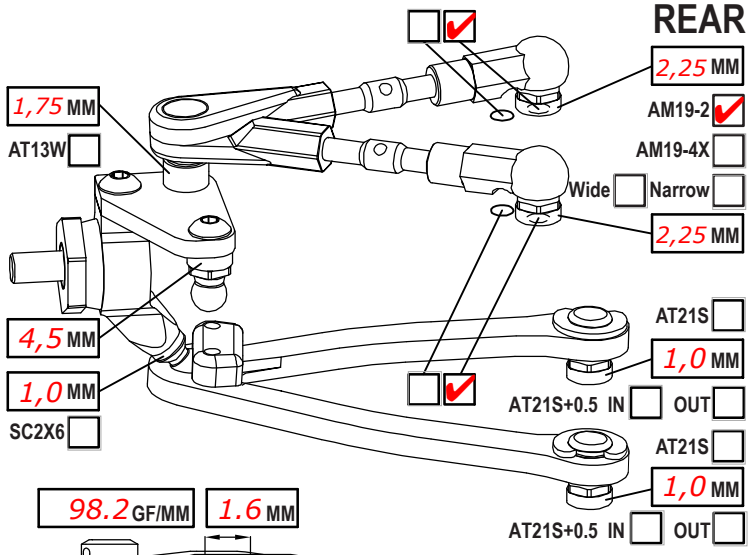

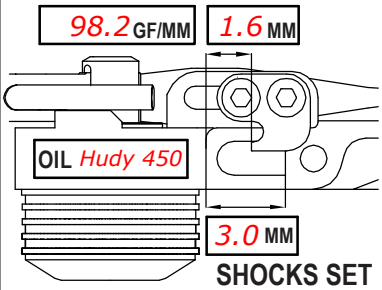

SHOCKS SET

CAMBER ANGLE / °	2	ROTOR	STD ☑ ☐
CASTER ANGLE / °	-2 short	SPRING	STD ☐ S ☑
TOE ANGLE / °	2,5	DAMPER	D2.2 ☑ ☐
RIDE HEIGHT / MM	5,4	SRS/RHS ARR.	I ☑ II ☐
DOWNSTOP / MM	5,2	PSS SETUP -	MM A ☐ B ☐
UPWNSTOP / MM	-		
STABILIZER Ø / MM	1,1		
LOW ARM C04M1+0.5 ☐	+8 ☑		
STEER. ARM AM23 ☑	☐		
WHEEL SPACER / MM	-		

REAR DRIVE GB2B ☑ LOW ☑ HIGH ☐

DIFF. OIL Hudy 7000 | DIFF WASHERS small shim

DOGBONE DRIVE EVD ☑ | WHEELHUB AM06WL ☑ ☐

FRAME FLEX SETTING

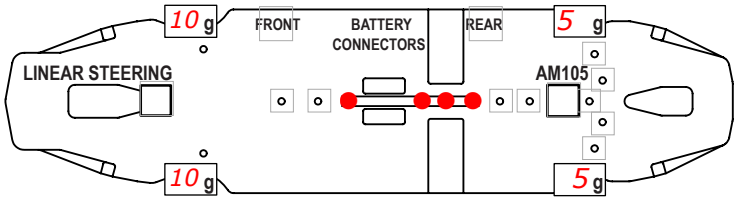

LOWER DECK C01B-X-MM ☐ C01B-X-MMA ☑ ☐

SHIM UNDER AM105 ____ ST55 ☑ ☐

ST105/ST110 DOWN/SOFT ☐ UP/STIFF ☐

MOTOR MOUNT AM77MM



☑ ☐ ST09 TOP DECK C27MM2 ☐ C27MMS ☐ ST09 ☐

TIRES	HPI 28C
INSERTS	
WHEELS	
ADDITIVE	LRP Carpet 2



TIME - FR 20min RR 20min

NOTES

MOTOR LATERAL SHIFT / MM 0	ACKERMANN SHIMS / MM 1,0
MOTOR LRP Stock 13,5T	SERVO Futaba
SPUR 103 PINION 45 RATIO 4.35	STEER TRAVEL IN 24 OUT
BODY ZOO PreoPad 0,5mm	BATTERY LRP 6400
WING ZOO	RECEIVER Futaba
ESC LRP Flow X	RADIO Futaba
ESC SETTING	
BEST LAPTIME 11,97	QUALIF./FINAL POSITION 2 / 2

COMMENTS

-C26 mount in front of Topdeck
-IFJ / IRJ
-Optional Test, Rear Damperspringposition 1,4mm
-Glued Sitewall on Front Tires

www.petitrc.com