


NAME **Max Mächler**
 COUNTRY **United States**
 RACE **IIC Las Vegas (GT-Spec)**
 TRACK **Westgate Hotel (Black CRC Carpet)**

DATE **15-18.11.2018** TEMP. °C AIR / TRACK **20 / 20**
 ASPHALT ☐ (OUTDOOR ☐ INDOOR ☐) CARPET ☒
 TRACK CONDITION TECHNICAL ☐ MIXED ☒ FAST ☐
 TRACTION LOW ☐ MEDIUM ☐ HIGH ☒


FRONT

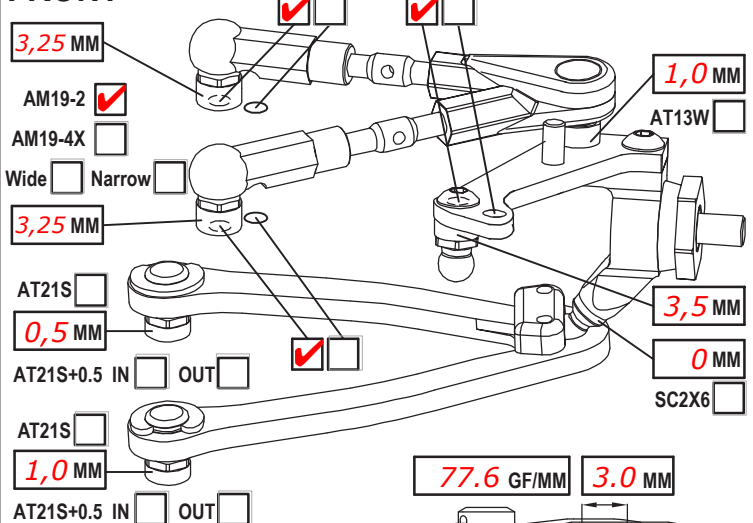

3,25 MM ☒ ☐ ☒ ☐ 1,0 MM ☐ AT13W ☐
 AM19-2 ☒ ☐ AM19-4X ☐
 Wide ☐ Narrow ☐
 3,25 MM ☐ ☐ 3,5 MM ☐ 0 MM ☐ SC2X6 ☐
 AT21S ☐ 0,5 MM ☒ ☐ AT21S+0.5 IN ☐ OUT ☐
 AT21S ☐ 1,0 MM ☐ AT21S+0.5 IN ☐ OUT ☐
 CAMBER ANGLE / ° **2,0**
 CASTER ANGLE / ° **5,0**
 TOE ANGLE / ° **1,2 per side**
 RIDE HEIGHT / MM **5,2**
 DOWNSTOP / MM **5,6**
 UPWNSTOP / MM **-**
 STABILIZER Ø / MM **1,2**
 LOW ARM C04M1+0.5 ☐ **+9** ☒
 STEER. ARM AM14LS ☒ ☐
 WHEEL SPACER / MM **-**
 FRONT DRIVE SPOOL ☒ GB2B ☐ LOW ☒ HIGH ☐
 DIFF. OIL ☐ DIFF WASHERS ☐
 DOGBONE DRIVE ST02 ☐ WHEELHUB AM06WL ☒ ☐

SHOCKS SET
 ROTOR STD ☒ ☐
 SPRING STD ☐ S ☒
 DAMPER D2.2 ☒ ☐
 SRS/RHS ARR. I ☒ II ☐
 PSS SETUP - MM A ☐ B ☐

REAR

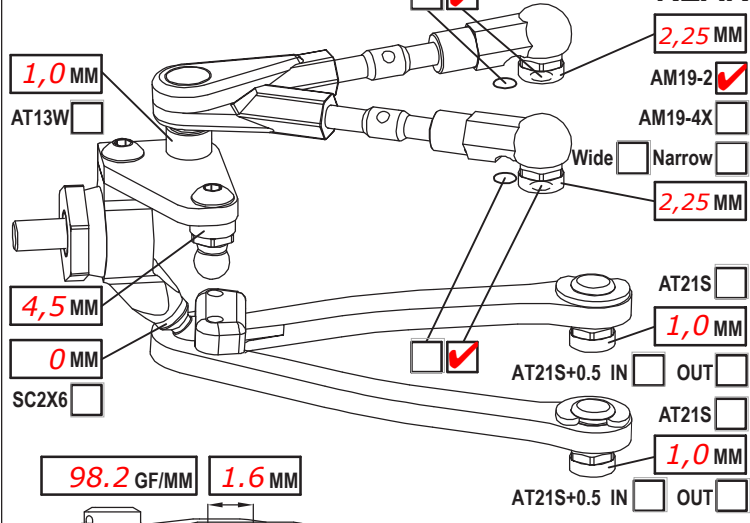

1,0 MM ☐ AT13W ☐ 2,25 MM ☒ ☐ AM19-2 ☒ ☐ AM19-4X ☐
 Wide ☐ Narrow ☐
 4,5 MM ☐ 0 MM ☐ SC2X6 ☐ 2,25 MM ☐
 AT21S ☐ 1,0 MM ☐ AT21S+0.5 IN ☐ OUT ☐
 AT21S ☐ 1,0 MM ☐ AT21S+0.5 IN ☐ OUT ☐
 CAMBER ANGLE / ° **2,0**
 CASTER ANGLE / ° **2,0**
 TOE ANGLE / ° **0**
 RIDE HEIGHT / MM **5,4**
 DOWNSTOP / MM **4,6**
 UPWNSTOP / MM **-**
 STABILIZER Ø / MM **1,1**
 LOW ARM C04M1+0.5 ☐ **+8** ☒
 STEER. ARM AM23 ☒ ☐
 WHEEL SPACER / MM **0,5**
 REAR DRIVE GB2B ☒ LOW ☒ HIGH ☐
 DIFF. OIL **10.000** DIFF WASHERS **SmallShim**
 DOGBONE DRIVE EVD ☐ WHEELHUB AM06WL ☒ ☐

SHOCKS SET
 ROTOR STD ☒ ☐
 SPRING STD ☐ S ☒
 DAMPER D2.2 ☒ ☐
 SRS/RHS ARR. I ☒ II ☐
 PSS SETUP - MM A ☐ B ☐

FRAME FLEX SETTING
 FRONT ☐ BATTERY CONNECTORS ☒ REAR ☐
 15 g ☐ 0 g ☐
 LINEAR STEERING ☐ C25 ☐ CHASSIS STIFFENER ☐ MOTOR MOUNT SCREWS ☐
 15 g ☐ 0 g ☐
 ADDITIONAL WEIGHTS ☐

LOWER DECK C01B-XAH-LA
 CHASSIS STIFFENER ST135 ☐ ST165 ☒
 C26 ☐ SHIM UNDER STIFFNER: **no** ST55 ☒ C26 ☐
TOP DECK CUTS
 ST09 ☐ TOP DECK C27X-1 ☒ VTD ☐ ST09 ☐
 STD ☐ AT63 ☐ AT63 ☐ C38 ☐ AM98 ☐ STD ☐ CUT ☐

TIRES **Gravity RC**
 INSERTS ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐
 WHEELS ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐
 ADDITIVE **SXT 3.0** TIME - FR RR

NOTES Sidewalls glued to 59.5mm

MOTOR LATERAL SHIFT / MM **0** ACKERMANN SHIMS / MM **1,0**
 MOTOR **Handout 21,5T** SERVO **MKS HBL575 SL**
 SPUR **90** PINION **47** RATIO **3.64** STEER TRAVEL IN **18** OUT **-**
 BODY **PF Ford GT** BATTERY **LRP 6400 SS G2**
 WING **Std. most backwards** RECEIVER **Sanwa RX482**
 ESC **Handout** RADIO **Sanwa M12S**
 ESC SETTING **Blinky**
 BEST LAPTIME QUALIF./FINAL POSITION **1 / 1**

AT15 bearing spacers in Wheelhubs.
AXON Oil in Diff and Dampers.