


NAME **Freddy Südhoff**
COUNTRY **Germany**
RACE **ETS Rd. 2, Germany**
TRACK **Daun**

DATE _____ TEMP. °C AIR / TRACK °C / °C
ASPHALT ☐ (OUTDOOR ☐ INDOOR ☒) CARPET ☒
TRACK CONDITION TECHNICAL ☐ MIXED ☐ FAST ☒
TRACTION LOW ☐ MEDIUM ☐ HIGH ☒


FRONT

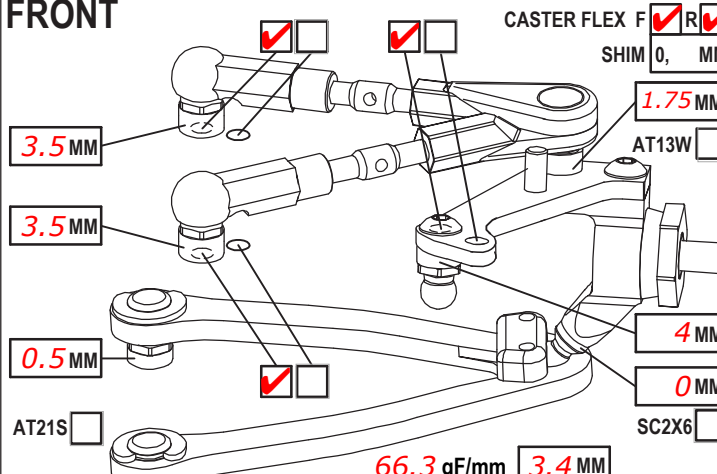

CASTER FLEX F ☒ R ☒
SHIM 0, MM
1.75 MM
AT13W ☐
3.5 MM
3.5 MM
0.5 MM
4 MM
0 MM
SC2X6 ☐
1 MM
66.3 gF/mm 3.4 MM
OIL 450
0.6 MM
SHOCKS SET
ROTOR STD ☒
SPRING STD ☐ S ☒
DAMPER D2.2 ☐
ACTION SYM. ☐ ASYM. ☐
SRS/RHS ARR. I ☒ II ☐
FRONT DRIVE GD3 ☐ SPOOL ☒ GB2B ☐ LOW ☒ HIGH ☐
DIFF. OIL _____ DIFF. WASHERS _____
DOGBONE DRIVE ST17 ☐ ST11 ☐ ST12 ☐ BB ☐ ST02 ☐
WHEELHUB AM06WL ☒ AM06S-M ☐ AM06W ☐

CAMBER ANGLE / ° **2**
CASTER ANGLE / ° **4**
TOE ANGLE / ° **1**
RIDE HEIGHT / MM **5.2**
DOWNSTOP / MM **6**
UPWNSTOP / MM _____
STABILIZER Ø / MM **1.1**
LOW ARM C04M1 ☐ +0.5 ☒
STEER. ARM AM14A ☐


REAR

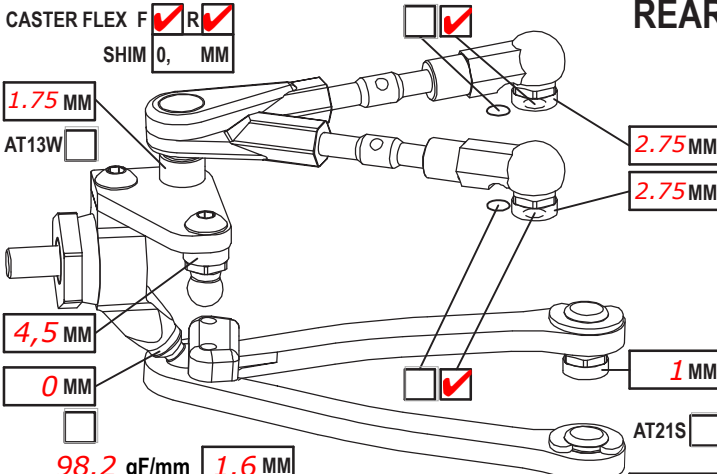

CASTER FLEX F ☒ R ☒
SHIM 0, MM
1.75 MM
AT13W ☐
2.75 MM
2.75 MM
4,5 MM
0 MM
1 MM
98.2 gF/mm 1.6 MM
OIL 450
3.0 MM
SHOCKS SET
ROTOR STD ☒
SPRING STD ☐ S ☒
DAMPER D2.2 ☐
ACTION SYM. ☐ ASYM. ☐
SRS/RHS ARR. I ☒ II ☐
REAR DRIVE GD3R ☐ GB2B ☐ LOW ☒ HIGH ☐
DIFF. OIL **5000** DIFF. WASHERS _____
DOGBONE DRIVE ST11 ☐ ST12 ☐ BB ☐ ST17 ☐ EVD ☐
WHEELHUB AM06WL ☒ AM06S-M ☐ AM06W ☐

CAMBER ANGLE / ° **2.25**
CASTER ANGLE / ° **short 2°**
TOE ANGLE / ° **2.5**
RIDE HEIGHT / MM **5.4**
DOWNSTOP / MM **4.8**
UPWNSTOP / MM _____
STABILIZER Ø / MM **1.1**
LOW ARM C04M1 ☐
STEER. ARM AM23 ☐

FRAME FLEX SETTING

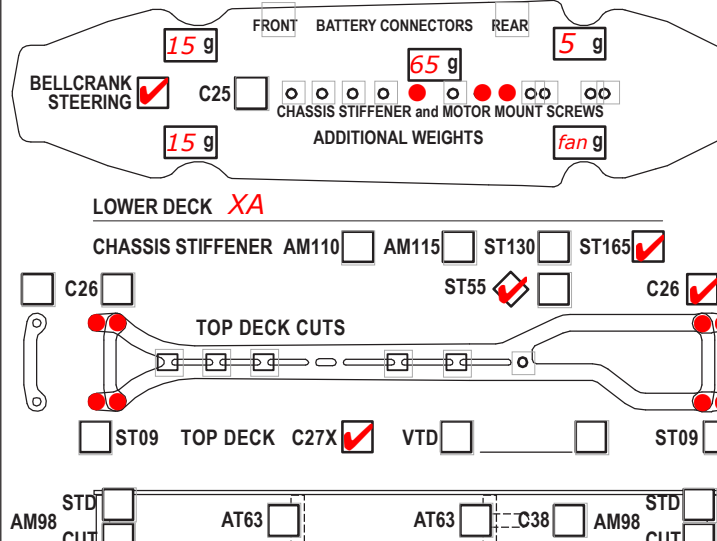

FRONT BATTERY CONNECTORS REAR
15 g 65 g 5 g
BELLCRANK STEERING ☒ C25 ☐
CHASSIS STIFFENER and MOTOR MOUNT SCREWS
ADDITIONAL WEIGHTS fan g
LOWER DECK **XA**
CHASSIS STIFFENER AM110 ☐ AM115 ☐ ST130 ☐ ST165 ☒
C26 ☐ ST55 ☒ C26 ☒
TOP DECK CUTS
ST09 TOP DECK C27X ☒ VTD ☐ ST09 ☐
AM98 STD ☐ AT63 ☐ AT63 ☐ C38 ☐ AM98 STD ☐ CUT ☐

FL FR RL RR TIRES FRONT REAR
BRAND **Volante**
INSERTS
WHEELS
ADDITIVE

MOTOR LATERAL SHIFT / MM
MOTOR **Hobbywing G3 4.5T**
SPUR **116** PINION **29** RATIO **7.60**
BODY **PF Type S pro light**
WING **Std.**
ESC **Hobbywing**
ESC SETTING
BEST LAPTIME _____ QUALIF./FINAL POSITION _____ /
CONTACT _____

ACKERMANN SHIMS / MM **1**
SERVO **MKS**
STEER TRAVEL IN _____ OUT **24**
BATTERY **Silverback Spiral III**
RECEIVER
RADIO

COMMENTS
IFJ and IRJ used, no PSS, Shim under ST165