


NAME **Max Mächler**
COUNTRY **Germany**
RACE **Charity Race 2017 2.0**
TRACK **RC-Landia Scandiano**

DATE **01-03.12.2017** TEMP. °C AIR / TRACK **5°C / 5°C**
ASPHALT ☐ (OUTDOOR ☐ INDOOR ☒) CARPET ☒
TRACK CONDITION TECHNICAL ☐ MIXED ☐ FAST ☒
TRACTION LOW ☐ MEDIUM ☐ HIGH ☒


FRONT

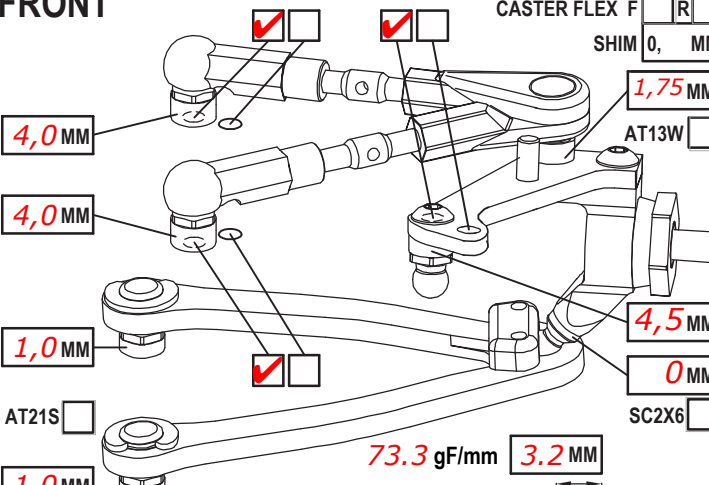

CASTER FLEX F ☐ R ☐
SHIM 0, MM
1,75 MM
AT13W ☐
4,0 MM
4,0 MM
1,0 MM
AT21S ☐
1,0 MM
73.3 gF/mm 3.2 MM
OIL 450cst
1.4 MM
SHOCKS SET
ROTOR STD ☒
SPRING STD ☐ S ☒
DAMPER D2.2 ☒
ACTION SYM. ☐ ASYM. ☐
SRS/RHS ARR. I ☒ II ☐
FRONT DRIVE GD3 ☐ SPOOL ☒ GB2B ☐ LOW ☒ HIGH ☐
DIFF. OIL
DOGBONE DRIVE ST17 ☒ ST11 ☐ ST12 ☐ BB ☒ ST02 ☐
WHEELHUB AM06WL ☒ AM06S-M ☐ AM06W ☐

CAMBER ANGLE / ° **1,25**
CASTER ANGLE / ° **5**
TOE ANGLE / ° **1,25 per side**
RIDE HEIGHT / MM **5,0**
DOWNSTOP / MM **5,8**
UPWNSSTOP / MM **-**
STABILIZER Ø / MM **1,1**
LOW ARM C04M1 ☐ **0,5** ☒
STEER. ARM AM14A ☐ **LS** ☒
WHEEL SPACER / MM **1,0**


REAR

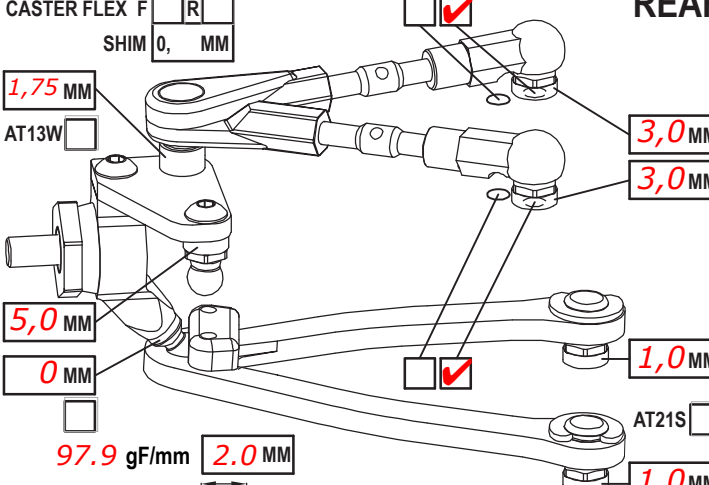

CASTER FLEX F ☐ R ☐
SHIM 0, MM
1,75 MM
AT13W ☐
3,0 MM
3,0 MM
5,0 MM
0 MM
AT21S ☐
1,0 MM
97.9 gF/mm 2.0 MM
OIL 450cst
3.4 MM
SHOCKS SET
ROTOR STD ☒
SPRING STD ☐ S ☒
DAMPER D2.2 ☒
ACTION SYM. ☐ ASYM. ☐
SRS/RHS ARR. I ☒ II ☐
REAR DRIVE GD3R ☐ GB2B ☒ LOW ☒ HIGH ☐
DIFF. OIL **10.000** DIFF. WASHERS **std.**
DOGBONE DRIVE ST11 ☐ ST12 ☐ BB ☒ ST17 ☐ EVD ☐
WHEELHUB AM06WL ☒ AM06S-M ☐ AM06W ☐

CAMBER ANGLE / ° **1,25**
CASTER ANGLE / ° **0**
TOE ANGLE / ° **1,5**
RIDE HEIGHT / MM **5,2**
DOWNSTOP / MM **4,8**
UPWNSSTOP / MM **-**
STABILIZER Ø / MM **1,0**
LOW ARM C04M1 ☐ **0,5** ☒
STEER. ARM AM23 ☒
WHEEL SPACER / MM **1,0**

FRAME FLEX SETTING

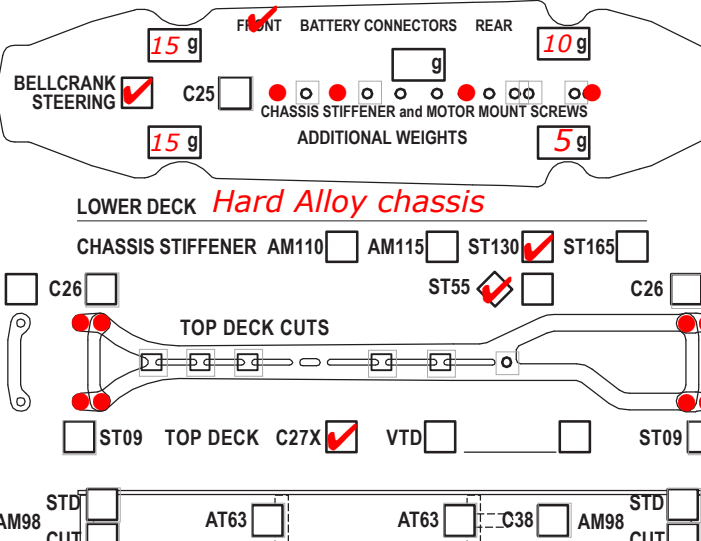

BELL CRANK STEERING ☒ C25 ☐
CHASSIS STIFFENER and MOTOR MOUNT SCREWS
ADDITIONAL WEIGHTS **5 g**
LOWER DECK **Hard Alloy chassis**
CHASSIS STIFFENER AM110 ☐ AM115 ☐ ST130 ☒ ST165 ☐
C26 ☐ ST55 ☒ C26 ☐
TOP DECK CUTS
ST09 ☐ TOP DECK C27X ☒ VTD ☐ ST09 ☐
AM98 STD ☐ CUT ☐ AT63 ☐ AT63 ☐ C38 ☐ AM98 STD ☐ CUT ☐

FL	FR	RL	RR	TIRES	FRONT	REAR
				BRAND	Volante	
				INSERTS	std.	
				WHEELS	std.	
				ADDITIVE	CS High Grip	

MOTOR LATERAL SHIFT / MM **0**
MOTOR **Handout 13,5T**
SPUR **100** PINION **38** RATIO **5.00**
BODY **PF Speed6 ProLite**
WING **ProLite Wing**
ESC **LRP FLOWX**
ESC SETTING **0-Boost**
BEST LAPTIME **11,5** QUALIF./FINAL POSITION **1 / 1**
CONTACT **Max@Awesomatix.com**

ACKERMANN SHIMS / MM **1**
SERVO **MKS HBL575 SL**
STEER TRAVEL IN **23** OUT
BATTERY **LRP 6400 SS LCG**
RECEIVER **Sanwa**
RADIO **Sanwa M12S**

COMMENTS
FF,FR, RF, RR are AT21 / No shims under ST130 / IFJ Set is used
On rear part of Topdeck a Ball-link is used for stiff up the bulkhead/Topdeck area.
Rear springs bent up to 110deg.