


NAME **Sam Isaacs**  
 COUNTRY **USA**  
 RACE **IIC Las Vegas**  
 TRACK **IIC**

DATE **10/8/16**


TEMP.°C AIR / TRACK **75°F / 75°F**

TRACK CONDITION TECHNICAL ☐ MIXED ☒ FAST ☐  
 TRACTION LOW ☐ MEDIUM ☒ HIGH ☐

### FRONT

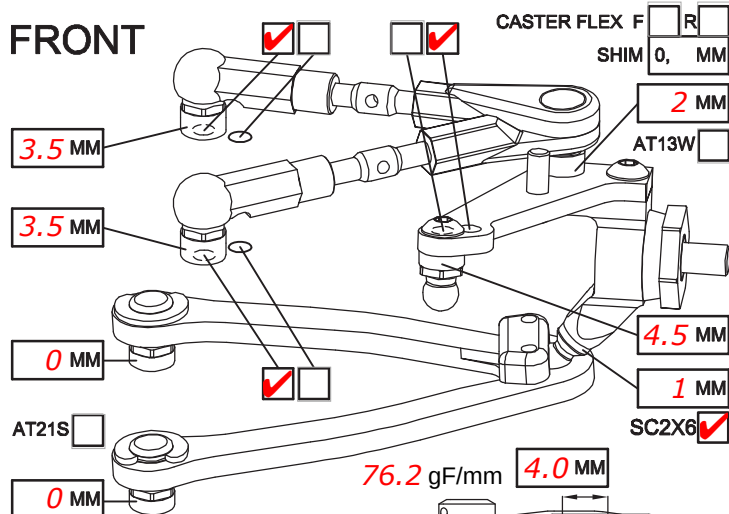


CAMBER ANGLE / ° **1.5**  
 CASTER ANGLE / ° **4**  
 TOE ANGLE / ° **1 out**  
 RIDE HEIGHT / MM **5.8**  
 DOWNSTOP / MM **1.75 ORH**  
 UPSTOP / MM  
 STABILIZER Ø / MM **1.2**  
 LOW ARM C04AL ☒  
 STEERING ARM STD ☒  
 WHEEL SPACER / MM **0**

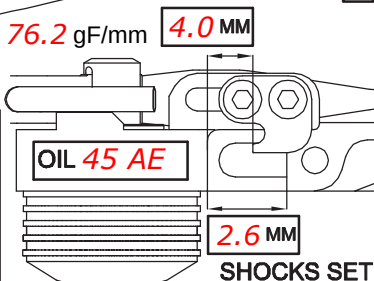


ROTOR STD ☒  
 SPRING STD ☐ S ☒  
 DAMPER D2.1 ☐ **D2.2** ☒  
 ACTION SYM. ☐ ASYM. ☐  
 SRS/RHS ARR. I ☒ II ☐

FRONT DRIVE ☐ GD3 ☐ SPOOL ☒ GD2B ☐  
 DIFF OIL ☐ DIFF WASHERS  
 DOGBONE DRIVE ST17-1 ☐ ST11 ☐ ST12 ☐ BB ☐ ST02 ☐

### REAR

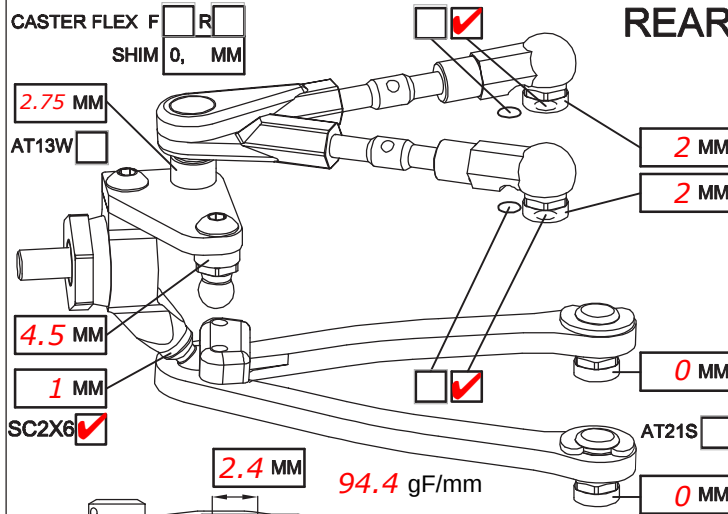


CAMBER ANGLE / ° **1.5**  
 CASTER ANGLE / ° **0**  
 TOE ANGLE / ° **2.75**  
 RIDE HEIGHT / MM **6**  
 DOWNSTOP / MM **2.25 ORH**  
 UPSTOP / MM  
 STABILIZER Ø / MM **1.2**  
 LOW ARM C04AL ☒  
 STEERING ARM STD ☒  
 WHEEL SPACER / MM **0**

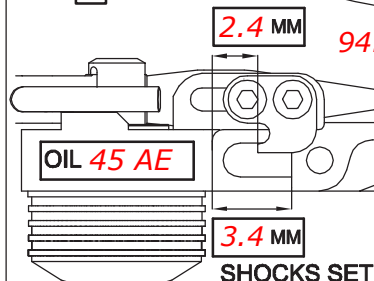


ROTOR STD ☒  
 SPRING STD ☐ S ☒  
 DAMPER D2.1 ☐ **D2.2** ☒  
 ACTION SYM. ☐ ASYM. ☐  
 SRS/RHS ARR. I ☒ II ☐

REAR DRIVE ☐ GD3R ☐ GD2B ☒  
 DIFF OIL **10K** DIFF WASHERS  
 DOGBONE DRIVE ST11 ☐ ST12 ☐ BB ☐ ST17-1 ☐ EVD ☐

### FRAME FLEX SETTING

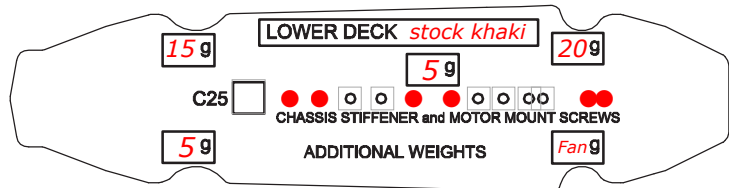

CHASSIS STIFFENER AM110 ☐ AM115 ☒ ST130 ☐

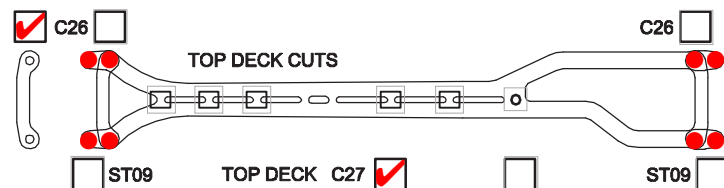

### COMMENTS

**sauce rear tires one race longer than front (2 races)**  
**no topdeck cuts**  
**stock chassis brace**  
**-try all screws in bottom of chassis**

| TIRES                        | FRONT                  | REAR                  |
|------------------------------|------------------------|-----------------------|
| BRAND <b>Gravity Handout</b> | <b>Gravity Handout</b> | <b>Gravit Handout</b> |
| INSERTS                      |                        |                       |
| WHEELS                       |                        |                       |
| ADDITIVE <b>Sxt 3.0</b>      | <b>Sxt 3.0</b>         | <b>sxt 3.0</b>        |

|                                   |                         |
|-----------------------------------|-------------------------|
| MOTOR LATERAL SHIFT / MM <b>0</b> | MOTOR <b>R1 V11 4.5</b> |
| ACKERMANN SHIMS / MM <b>0</b>     | SERVO <b>Awesomatix</b> |
| DRIVE RATIO <b>1.9</b>            | ESC <b>HW XR10 Pro</b>  |
| SPUR <b>114</b> PINION <b>27</b>  | BATTERY <b>R1 6200</b>  |
| BODY <b>IS 200, max forward</b>   | RECEIVER <b>Sanwa</b>   |
| WING <b>stock</b>                 |                         |

BEST LAPTIME **13.8** QUALIF. / FINAL POSITION **18 / 14**

ESC SETTING **XR10 Pro with softening**

COMMENTS / IMPRESSIONS

**AM06S-M Hubs**  
**-try more neutral mounted IS 200**  
**-didn't sauce outer 1/8th of tire**  
**- try 4 long @ Gate**

CONTACT