

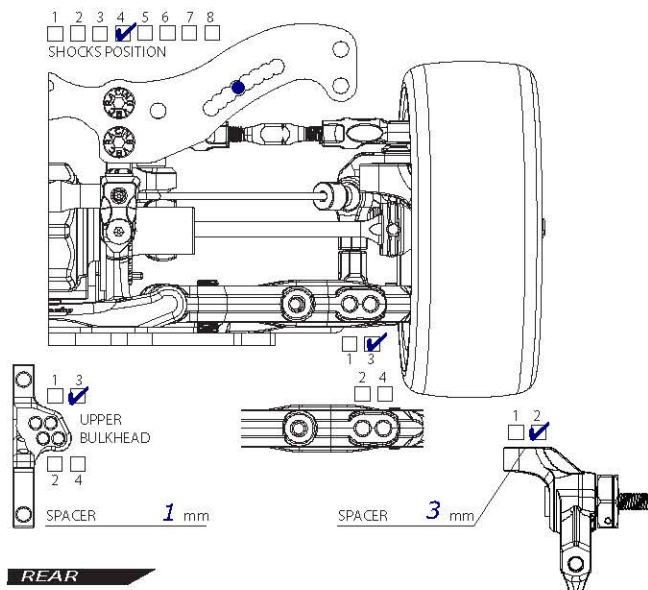
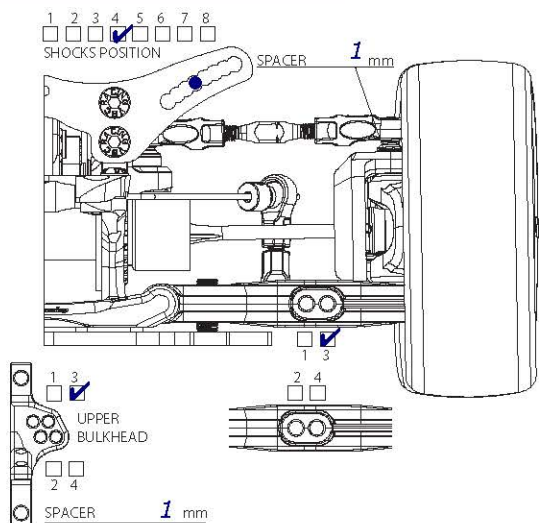
WILDFIRE DO6

1/10 4WD ELECTRIC COMPETITION TOURING CAR KIT

SETUP SHEET

vbc racingDRIVER **Ryan Maker**DATE **24-26/8/13**TRACK NAME **Hobby Habbit**RESULT **2nd**COMPOSITION **Indoor Asphalt** (INDOOR/OUTDOOR) BEST LAP **11.600**

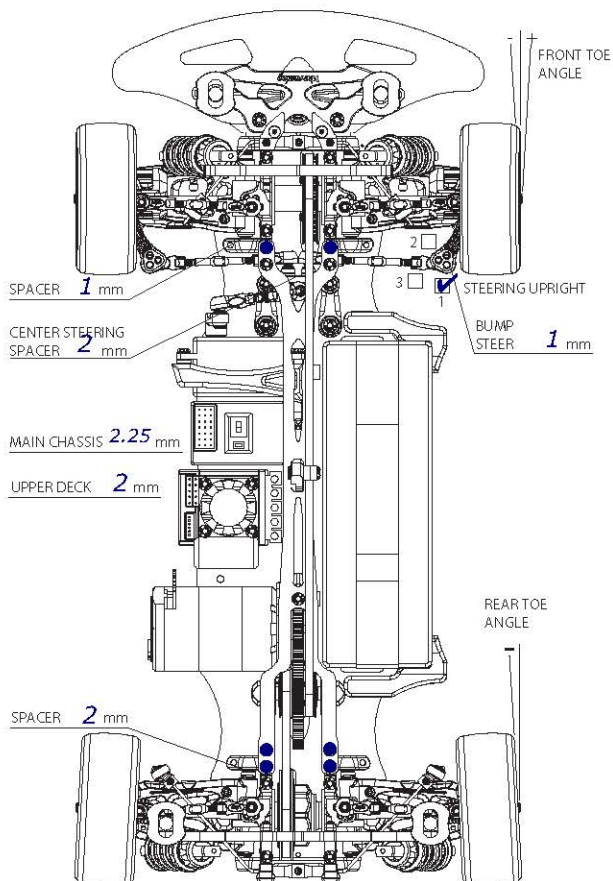
HUMIDITY

TRACK TEMP **20deg C**GRIP ☒ MEDIUM ☐ LOWSURFACE ☒ BUMPY**FRONT**


GROUND CLEARANCE	5.0 mm	DROOP	9.5mm to pin
CAMBER ANGLE	1.5 °	TOE ANGLE	1 °
CASTER BLOCK	4 °	FRONT DRIVE	DIFF (OIL)) / DIRECT
STABILIZER	1.2	1.4	WHEEL SPACER mm
SUSPENSION SHIM (FF)	0 mm	SUSPENSION SHIM (FR)	0 mm
SUSPENSION MOUNT (FF)	F00	SUSPENSION MOUNT (FR)	-C05
WHEELBASE	FRONT 3	REAR 1	BELT TENSION
AXLE TYPE / SIZE	TWO PIVOT JOINT / SINGLE JOINT (STEEL/ALUM)		mm

REAR

GROUND CLEARANCE	5.2 mm	DROOP	8mm to pin
CAMBER ANGLE	2 °	TOE ANGLE	2.5 °
REAR DRIVE	DIFF (OIL 4000)	DRIVE CUP	ALU / NUM / STEEL
STABILIZER	1.3	1.4	WHEEL SPACER mm
SUSPENSION SHIM (RF)	0 mm	SUSPENSION SHIM (RR)	0 mm
SUSPENSION MOUNT (RF)	-C10	SUSPENSION MOUNT (RR)	E15
WHEELBASE	FRONT 2	REAR 2	BELT TENSION
AXLE TYPE / SIZE	TWO PIVOT JOINT / SINGLE JOINT (STEEL/ALUM)		mm

**FRONT**

SHOCK LENGTH	61 mm
PISTON	3 holes / OTHERS
OIL	MR33 450cst
SPRING	VBC Orange
OIL SEALER CAP	✓ / MS / M / H
REBOUND	10 %
NOTES	1x VBC White O-ring

**REAR**

SHOCK LENGTH	61 mm
PISTON	3 holes / OTHERS
OIL	MR33 450cst
SPRING	VBC Red
OIL SEALER CAP	✓ / MS / M / H
REBOUND	10 %
NOTES	1x VBC White O-ring

MOTOR	SP MMM 4.5T	SPUR	153 T	PINION	36 T	PITCH	84p
TIRE	RE 32 Blue	TIRE INSERT	Foam	WHEEL	Ride		
TIRE ADDITIVE	MG V2	TIME	5	TIRE WARMER	60 deg		
ESC	SP Reventon 1.1	ESC SETTING	Mod2				
BATTERY	Silverback 7300 65C	BODY	MazdaSpeed 6 LW	REAR WING	Roche HD		
REMARKS							