

WILDFIRE DOT

1/10 4WD ELECTRIC COMPETITION TOURING CAR KIT

SETUP SHEET

Arn0

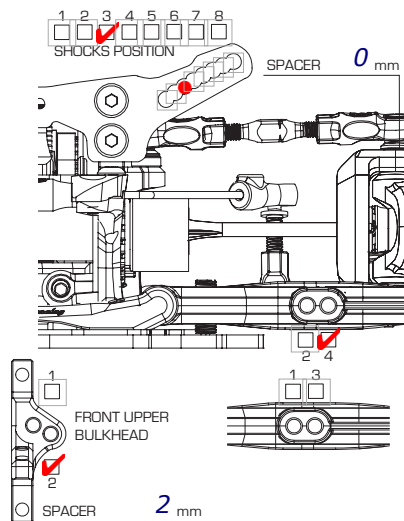
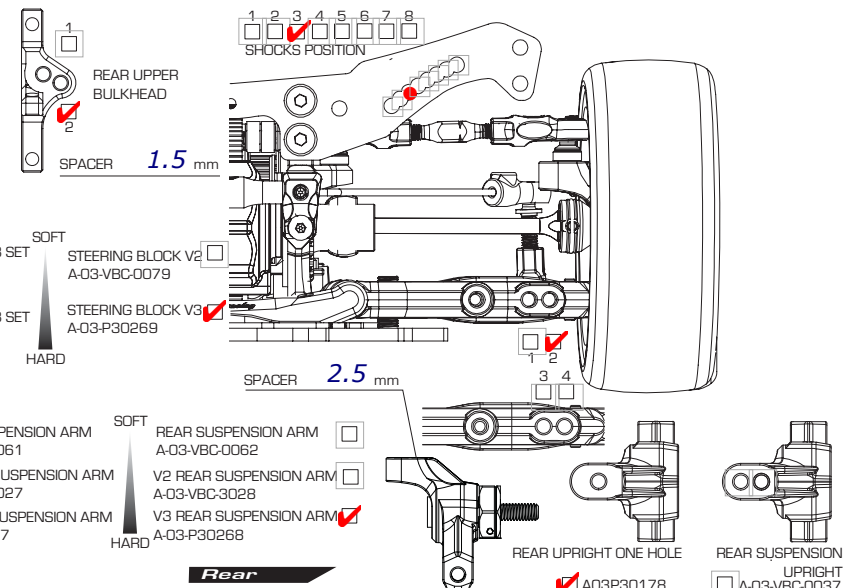


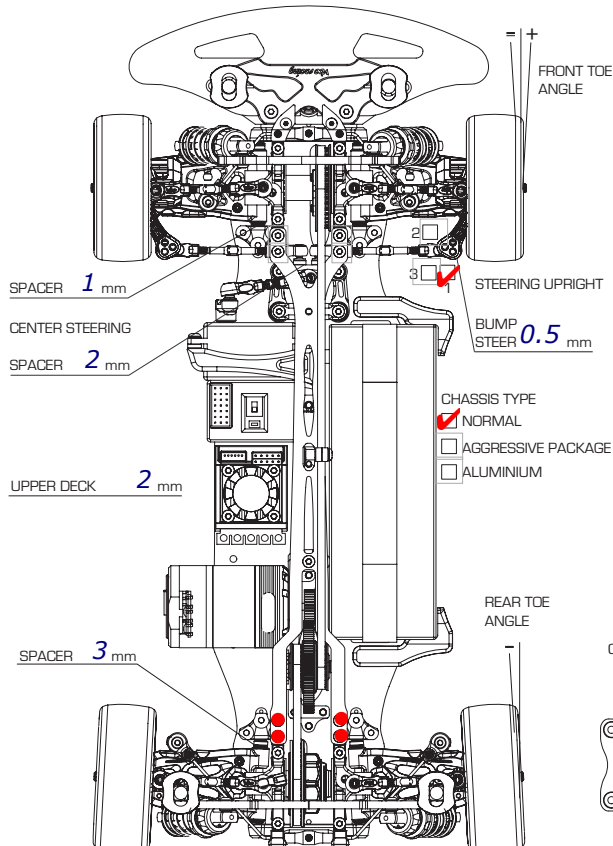
TRACK RESULT

ASPHALT / CARPET INDOOR / OUTDOOR BEST LAP

HUMIDITY TRACK TEMP AIR TEMP

GRIP LOW MEDIUM HIGH SURFACE BUMPY MEDIUM SMOOTH

 SHOCKS POSITION: 1 2 3 4 5 6 7 8 SPACER: 0 mm FRONT UPPER BULKHEAD: 1 2 SPACER: 2 mm WILD FIRE C-HUB SET VERSION 2 D-05-VBC-0064 WILD FIRE C-HUB SET VERSION 3 D-05-VBC-0066 FRONT SUSPENSION ARM A-03-VBC-0061 V2 FRONT SUSPENSION ARM A-03-VBC-3027 V3 FRONT SUSPENSION ARM A-03-P30267		 SHOCKS POSITION: 1 2 3 4 5 6 7 8 REAR UPPER BULKHEAD: 1 2 SPACER: 1.5 mm SPACER: 2.5 mm REAR SUSPENSION ARM A-03-VBC-0062 V2 REAR SUSPENSION ARM A-03-VBC-3028 V3 REAR SUSPENSION ARM A-03-P30268 REAR UPRIGHT ONE HOLE A03P30178 REAR SUSPENSION UPRIGHT A-03-VBC-0037	
Front		Rear	
GROUND CLEARANCE 5 mm DROOP 5.2 mm		GROUND CLEARANCE 5.4 mm DROOP 1 mm	
CAMBER ANGLE 1.5° TOE ANGLE 1°		CAMBER ANGLE 1.5° TOE ANGLE 3°	
CASTER ANGLE ° FRONT DRIVE DIFF (OIL) 1 / DIRECT		REAR DRIVE DIFF (OIL) 3000 DRIVE CUP ALUMINUM / STEEL	
STABILIZER 1.2 3 1.4 WHEEL SPACER mm		STABILIZER 1.2 3 1.4 WHEEL SPACER mm	
SUSPENSION SHIM (FR) 0.5 mm SUSPENSION SHIM (FR) 0.5 mm		SUSPENSION SHIM (FF) 0.5 mm SUSPENSION SHIM (FR) 0.5 mm	
SUSPENSION MOUNT (FR) F05 SUSPENSION MOUNT (FR) C0		SUSPENSION MOUNT (FF) C0 SUSPENSION MOUNT (FR) E30	
AXLE TYPE / SIZE TWO-PIECE JOINT / SINGLE JOINT (STEEL / ALUM) 50 mm		AXLE TYPE / SIZE TWO-PIECE JOINT / SINGLE JOINT (STEEL / ALUM) 49 mm	

**Front**

SHOCK LENGTH 10.8 mm

PISTON 4 hole(s) / OTHERS

OIL Muchmore 450

SPRING VBC Red

OIL SEALER CAP S / MS / H

REBOUND 20 %

NOTES

MOTOR Fleta ZX 4.5T

SPUR 116 T

PITCH

PINION 27 T

TIRE Rush 36X

TIRE INSERT

WHEEL

TIRE ADDITIVE LRP Carpet 2

BODY PF LTC-R LW

REAR WING Roche HD

ESC Fleta Pro

BATTERY

Silverback Spiral X 6300 90C

REMARKS Shock length measured between shock body and ball cup

Chassis Flex Setting (Fill in the Circle)

