

WILDFIRE D08

1/10 4WD ELECTRIC COMPETITION TOURING CAR KIT

SETUP SHEET

Arr0



TRACK

RESULT

ASPHALT

CARPET

INDOOR

OUTDOOR

BEST LAP

HUMIDITY

TRACK TEMP

AIR TEMP

GRIP LOW



MEDIUM

HIGH


SURFACE BUMPY

MEDIUM

SMOOTH

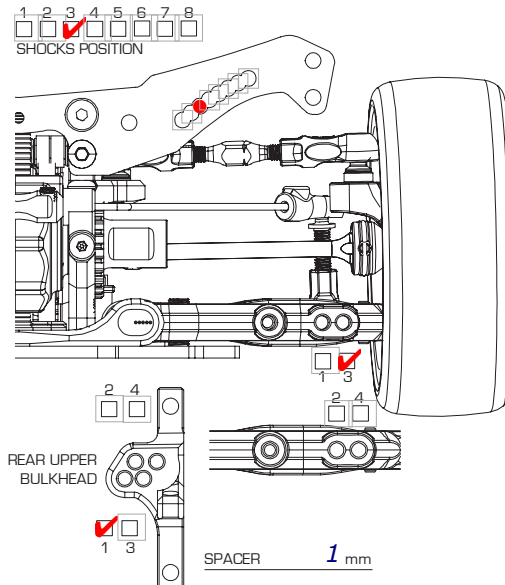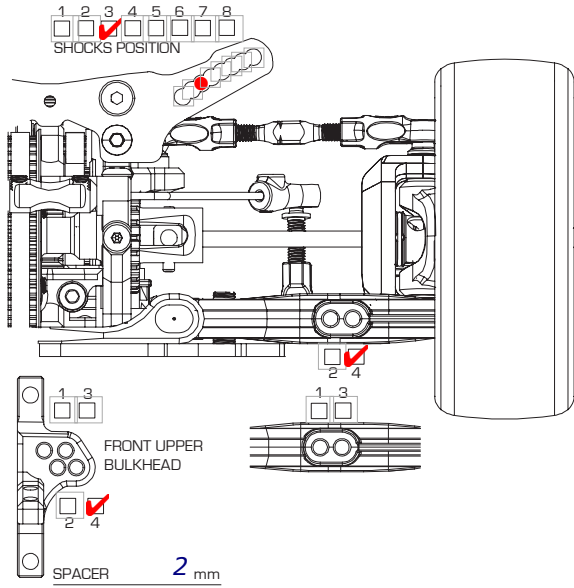

COMPOSITES

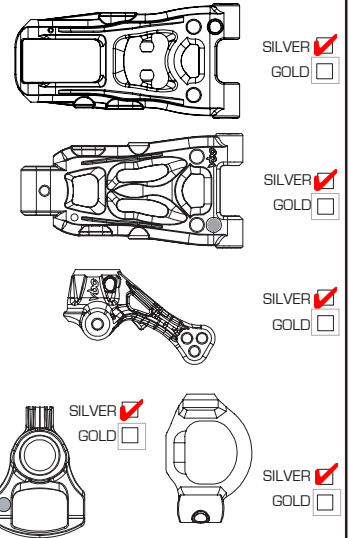


FRONT

GROUND CLEARANCE	5.2 mm	DROOP	5.2 mm
CAMBER ANGLE	1.5 °	TOE ANGLE	1 °
CASTER ANGLE	°	FRONT DRIVE DIFF (OIL)	1/DIRECT ☒
STABILIZER	1.2 ☒ 1.4	WHEEL SPACER	0 mm
SUSPENSION SHIM (FF)	0 mm	SUSPENSION SHIM (FR)	0 mm
SUSPENSION MOUNT (FF)	2 Dot Out	SUSPENSION MOUNT (FR)	1 Dot
AXLE TYPE / SIZE	TWO-PIECE JOINT ☒ SINGLE JOINT ☒ (STEEL / ALUM)		52 mm


REAR

GROUND CLEARANCE	5.4 mm	DROOP	1 mm
CAMBER ANGLE	2 °	TOE ANGLE	2.5 °
REAR DRIVE	DIFF (OIL) 3000	DRIVE CUP	ALUMINUM ☒ STEEL
STABILIZER	1.2 ☒ 1.4	WHEEL SPACER	0 mm
SUSPENSION SHIM (FF)	0 mm	SUSPENSION SHIM (FR)	0 mm
SUSPENSION MOUNT (FF)	1 Dot	SUSPENSION MOUNT (FR)	3 Dot Out
AXLE TYPE / SIZE	TWO-PIECE JOINT ☒ SINGLE JOINT ☒ (STEEL / ALUM)		49 mm

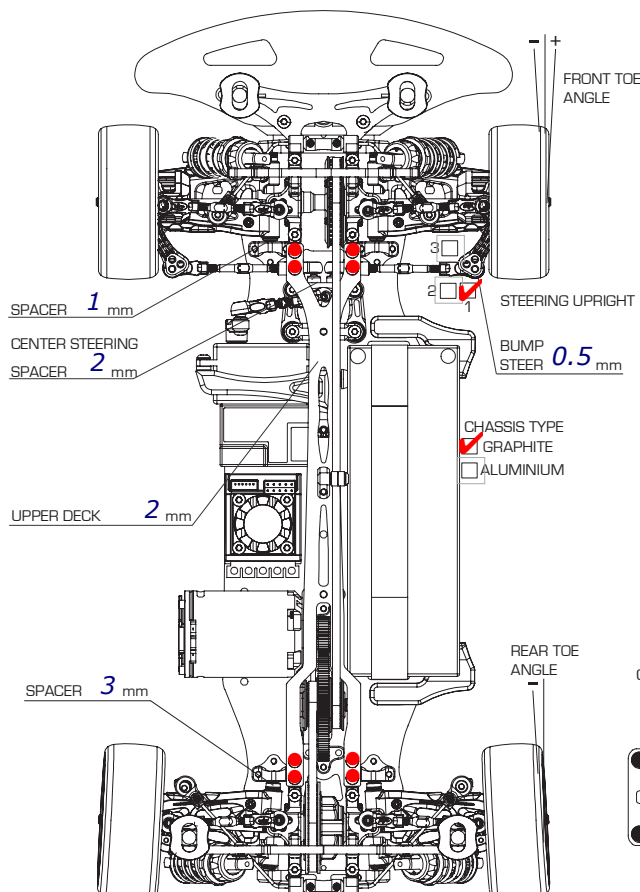

FRONT

SHOCK LENGTH	10.8 mm
PISTON	☒ 4 hole(s) / OTHERS
OIL	500 Muchmore
SPRING	VBC Red
OIL SEALER CAP	S ☒ M ☐ H
REBOUND	20 %
NOTES	Blue bladder



REAR

SHOCK LENGTH	10.8 mm
PISTON	☒ 4 hole(s) / OTHERS
OIL	500 Muchmore
SPRING	VBC Red
OIL SEALER CAP	S ☒ M ☐ H
REBOUND	20 %
NOTES	Blue bladder

MOTOR	Muchmore Fleta ZX	SPUR	116 T	PITCH	PINION	27 T
TIRE	Volante 36 GOLD	TIRE INSERT		WHEEL		
TIRE ADDITIVE	Volante Purple	BODY	Protoform LTC-R LW	REAR WING	Roche HD	
ESC	Muchmore Fleta Pro	BATTERY	Silverback Spiral II Low Profile			
REMARKS	Use D-05-VBC-0229 and D-05-VBC-0230 to tune to different tracks.					

Chassis Flex Setting (Fill in the Circle)

