

WILDFIRE D08

1/10 4WD ELECTRIC COMPETITION TOURING CAR KIT



SETUP SHEET

Arr0


vbe racing

TRACK **ETS Rnd2 MK**RESULT **12th**ASPHALT / CARPET ☒ INDOR / OUTDOOR ☐ BEST LAP **13.5**

HUMIDITY TRACK TEMP AIR TEMP

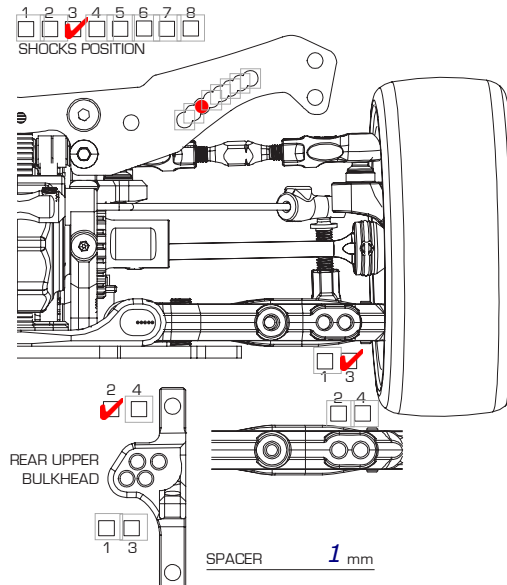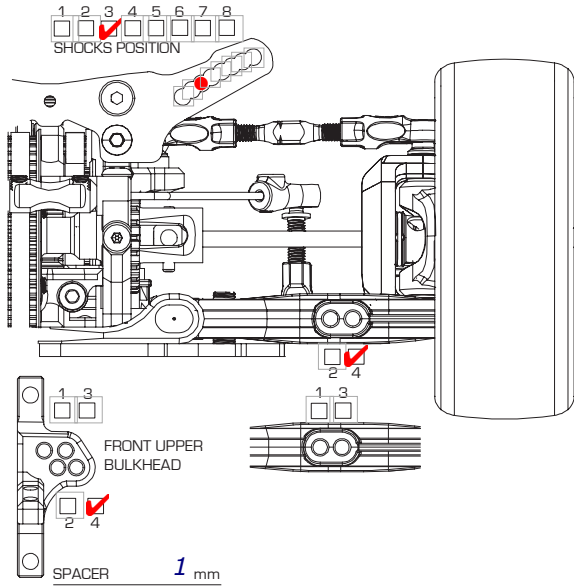GRIP LOW ☐ MEDIUM ☒ HIGH ☐ SURFACE BUMPY ☐ MEDIUM ☐ SMOOTH ☐

COMPOSITES

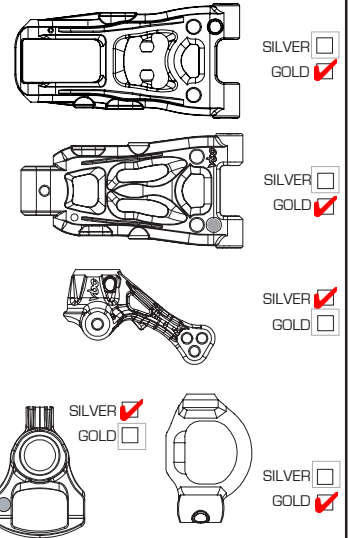

FRONT

GROUND CLEARANCE **5 mm** DROOP **5.8 Under Arm** mm

CAMBER ANGLE **-1 °** TOE ANGLE **2 °**

CASTER ANGLE **4 °** FRONT DRIVE DIFF (OIL) / DIRECT ☒

STABILIZER 1.2 1.3 ☒ 4 WHEEL SPACER **0 mm**

SUSPENSION SHIM (FF) **0** mm SUSPENSION SHIM (FR) **0** mm

SUSPENSION MOUNT (FF) **+5** SUSPENSION MOUNT (FR) **+3**

AXLE TYPE / SIZE TWO-PIECE JOINT ☒ SINGLE JOINT (STEEL / ALUM) ☒ **52 mm**

REAR

GROUND CLEARANCE **5.2 mm** DROOP **1 Under Hub** mm

CAMBER ANGLE **-1.5 °** TOE ANGLE **2.25 °**


REAR DRIVE DIFF (OIL **15k**) DRIVE CUP ALUMINUM ☒ / STEEL ☐

STABILIZER 1.2 1.3 ☒ 4 WHEEL SPACER **0 mm**

SUSPENSION SHIM (FF) **0** mm SUSPENSION SHIM (FR) **0** mm

SUSPENSION MOUNT (FF) **+3** SUSPENSION MOUNT (FR) **+4**

AXLE TYPE / SIZE TWO-PIECE JOINT ☐ SINGLE JOINT (STEEL / ALUM) ☒ **49 mm**

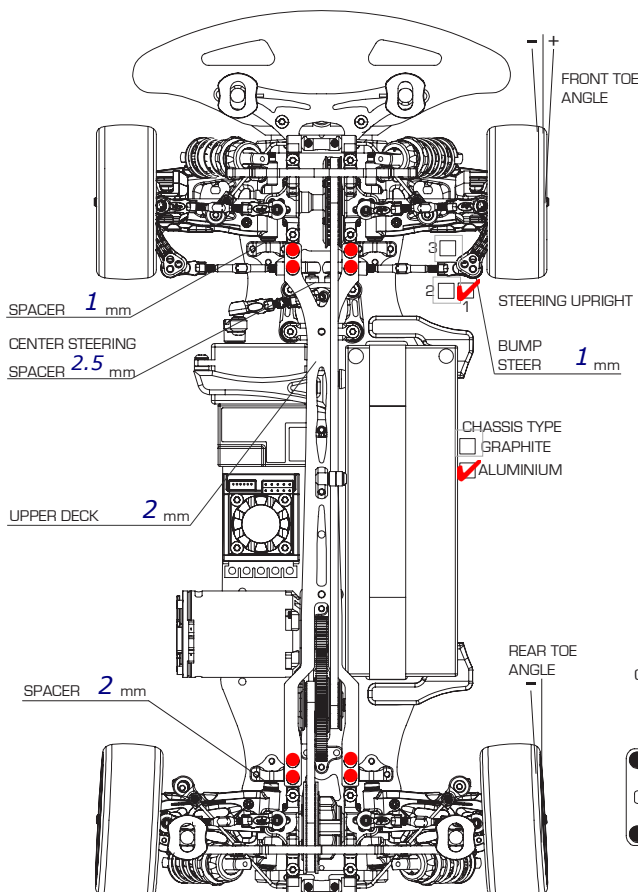

FRONT

SHOCK LENGTH **9.0** mm

PISTON 3 ☒ hole(s) / OTHERS


OIL **MR33 450**

SPRING **Xray 2.7**

OIL SEALER CAP S / MS / ☒ / H

REBOUND **10 %**

NOTES **Proto Short shocks**



REAR

SHOCK LENGTH **9.0** mm

PISTON 3 ☒ hole(s) / OTHERS

OIL **MR33 500**

SPRING **Xray 2.6**

OIL SEALER CAP S / MS / ☒ / H

REBOUND **10 %**

NOTES **Proto Short shocks**

MOTOR **MM Flea ZX 5.5** SPUR **153 T** PITCH **84** PINION **40** T

TIRE **Volante 28** TIRE INSERT WHEEL

TIRE ADDITIVE **ETS Controlled** BODY **LTC-R** REAR WING **PF Soft**

ESC **MM Flea Pro** BATTERY **Silverpack SpiralX 6300**

REMARKS

Chassis Flex Setting (Fill in the Circle)

