



Setup Sheet

Driver: Brian Preddy

Date: _____

Track: Stotfold

☐ Indoor

☐ Outdoor

☐ Tight / ☐ Open

☐ Slick

☐ Loose-Dirt

☐ Blue-Groove

☐ Smooth

☐ Rough

☐ Extra-Rough

Front Suspension (Circle or Check the Appropriate Settings)


Toe ☐ In ☒ Out 0°

Ride Height Slightly lower than rear

Camber ☒ - ☐ + 1°

Caster ☒ Stock ☐ Other _____

☒ Inner ☐ Outer



Rod Length

☐ Stock

☐ Other _____

☐ Plastic

Diff ☒ Steel

Drive Shafts

☐ Dogbone

☐ Aluminum

☐ CVD

☐ Steel

Front Shocks

Oil: 40

Piston: Orange 555 ☐ Standard / ☒ Drilled

Spring: Silver 1.5 Coil cut off

Internal Spring: _____


Limiters: ☒ Inside- Springs ☐ Outside- _____

Notes:

Sway Bar

☐ No

☒ Yes size _____

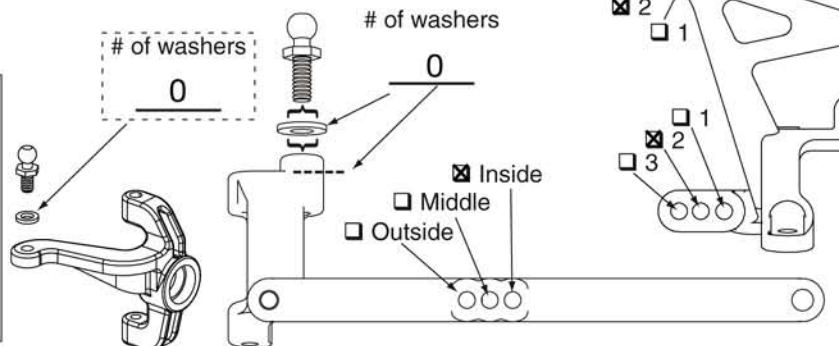

Rear Suspension

Toe-In ☒ Inside ☐ Outside 3°

Ride Height Driveshaft Level

Camber ☒ - ☐ + 1°

Pivot Support _____ ☐ No Shim ☐ Shim Under Front ☐ Shim Under Rear

☐ Plastic

Diff ☒ Steel

Drive Shafts

☒ Dogbone

☐ Aluminum

☐ CVD

☐ Steel

☐ Sliders

☐ Plastic

Rear Shocks

Oil: 30

Piston: 554 ☐ Standard / ☒ Drilled

Spring: Red


Limiters: ☒ Inside- 1 Washer ☐ Outside- _____

Notes:

Sway Bar

☒ No

☐ Yes size _____

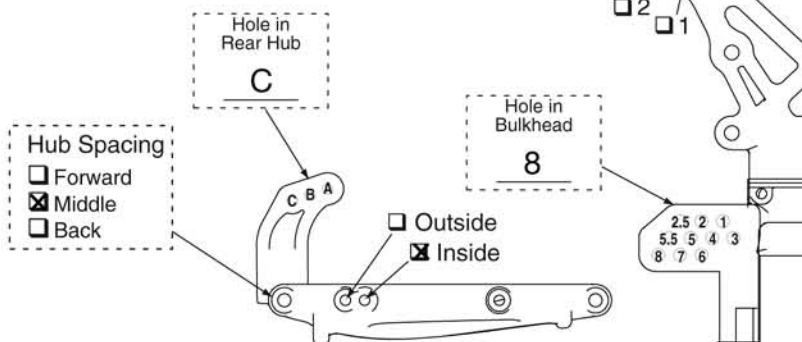

Tires _____ Compound _____ Foam _____

Front: _____

Rear: _____

Wing Setup: _____

Clicker Adjustment: ☐ Locked ☒ One-Way ☐ Soft Spring

Slipper: ☐ Yes ☐ No ☐ Stiff Spring _____

Battery Placement: ☐ Back ☒ Forward ☐ Other: _____

Notes: 78 Tooth Kevlar spur gear, Green belts allround

Motor: _____

Pinion: _____

Spur: _____