


Name: <u>Dakotah Phend</u>		Date: <u>7/2013</u>	Event: <u>Nationals</u>
City: _____ State: _____		Track: <u>LCRC</u>	
Track Conditions	☐ Indoor ☐ Tight ☐ Smooth ☐ Hard Packed ☐ Blue Groove ☒ Outdoor ☐ Open ☐ Rough ☐ Loose/Loamy ☐ Dry	☐ Wet ☐ Grass ☐ Low Bite ☐ High Bite ☐ Dusty ☐ Astro Turf ☒ Med Bite ☐ Other _____	

Front Suspension


Toe: 1 deg toe in
 Ride Height: 26mm - body off
 Camber: -1
 Steering Ackerman: long
 Sway Bar: 2.0
 Shock Type: ☐ Bladder ☒ Emulsion Oil: 30
 Piston: 3
 Spring: black
 Limiter/Droop: (remove button head pads)
 Overall Shock Length: full plus shock eyelets 2 turns
 Shock Location: 3-outside
 Bump Steer: ball side down on inside, 2mm bump wa
 Camber Link: 2
 Front Diff Fluid: 5000
 Center Diff Fluid: 7000

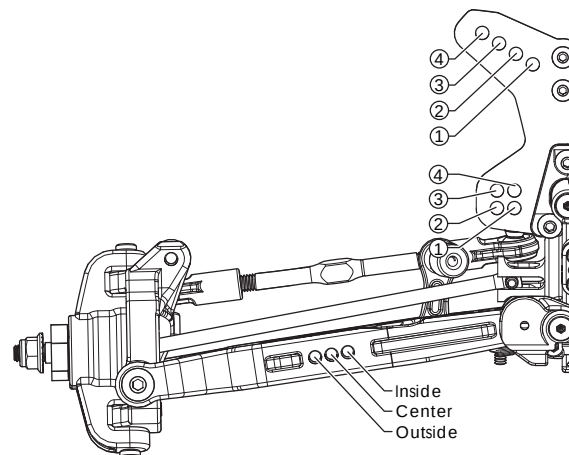

Notes: 1up insert on front outer
1 down insert on front inner
2mm washers under outside ball (bump)

Rear Suspension


Toe: 3
 Anti-Squat: 3
 Ride Height: 25mm
 Camber: -2
 Rear Hub Spacing: 4 front 0 rear
 Sway Bar: 1.8
 Shock Type: ☐ Bladder ☒ Emulsion Oil: 25
 Piston: 3
 Spring: silver
 Limiter/Droop: _____
 Camber Link: 2-b
 Shock Locations: 2-center
 Overall Shock Length: full plus 1 turn
 Rear Diff Fluid: 5000
 Battery Position: center

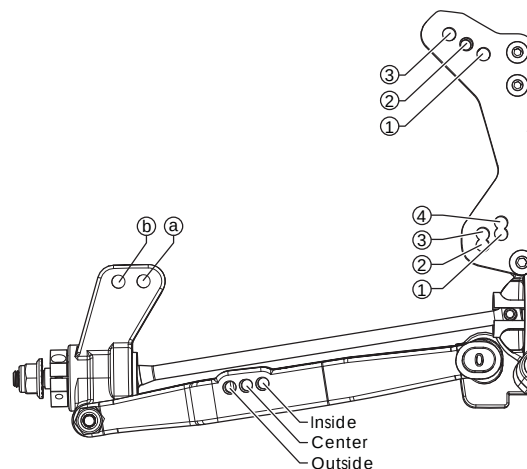

Electronics

Radio: _____	Timing Advance: _____
Servo: <u>SbU4U</u>	Throttle/Brake Expo: _____
ESC: <u>Orion R10</u>	Servo Expo: _____
Initial Brake: _____	Throttle/Brake EPA: _____
Drag Brake: _____	Motor: <u>Orion 4.0 I</u>
Throttle Profile: _____	Pinion: <u>11</u> Spur: <u>40</u>
	Battery: <u>Orion 6500</u>

Weight Placement
(Mark with "X")

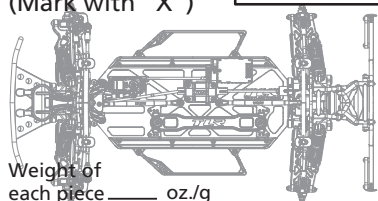

Tires	Compound	Insert	Additive
Front: <u>PL Holeshoot</u>	<u>M3</u>		
Rear: <u>PL Holeshoot</u>	<u>M3</u>		

Notes: rear hexes spaced out .5mm, will have witness marks on front of arms and steering links, dremel accordingly

Weight of each piece _____ oz./g