

SETUP SHEET

Track: OCRC

Driver: Casper

Date: 07.12.2010

☒ Indoor	☒ Smooth	☐ Slippery
☐ Outdoor	☐ Rough	☒ High-Bite
☐ Tight / ☒ Open		☐ Blue-Groove

XXX-SCT

FRONT SUSPENSION (Circle or Check the Appropriate Settings)

Toe ☐ In 1°
☒ Out

Ride Height Arms level

Camber ☒ - 1°
☐ +

Caster ☒ Stock
☐ Other

Sway Bar ☒ No
☐ Yes size:

of washers under steering / tie-rod ball studs


Spindle ball stud: 1

Bellcrank ball stud: 0

Spindle Location

☐ Top
☐ Middle
☒ Bottom

☐ A
☒ B
☐ C



☐ 4
☒ 3
☐ 2
☐ 1

of washers under ball stud
2

☐ Inside
☐ Middle
☒ Outside

☐ 1
☒ 2
☐ 3

☒ Long
☐ Short

Front Shocks

Oil: 35wt

Piston: 56 ☐ Standard ☐ Drilled

Spring: Blue (Buggy) Internal: ☐ Yes ☒ No

Limiters: ☒ Inside- 0.200 ☐ Outside- 0

REAR SUSPENSION

Alterations by Arn0 at PetitRC dot com

Toe-In ☒ Inside 3°
☐ Outside

Pivot Support 2° ☐ No Shim
☒ Shim Under Front
☐ Shim Under Rear > # of shims: 0.020

Ride Height Bones level

Camber ☒ - 1°
☐ +

Drive Shafts ☐ Dogbones ☐ Aluminum
☒ CVDs ☐ Steel

Rear Hub Spacing ☒ Forward
☐ Center
☐ Rear

Outdrives ☒ Steel
☐ Plastic

Sway Bar ☒ No
☐ Yes size


Rear Shocks

Oil: 32.5wt

Piston: 56 ☒ Standard ☐ Drilled

Spring: Pink

Limiters: ☐ Inside- 0 ☐ Outside- 0

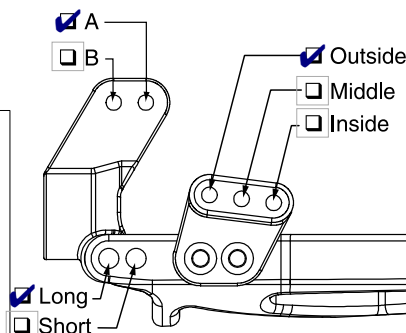

☒ 4
☐ 3
☐ 2
☐ 1

☐ 1
☒ 2
☐ 3

☒ Outside
☐ Middle
☐ Inside

☒ Long
☐ Short

Tires

Front: Aka Wishbone

Compound
Soft

Foam
Aka

Motor: 10.5 Pinion/Spur: /

Rear: JConcepts Bar Code

Gold

JConcepts

Battery Position: 3 foams in front

Weather Conditions/Notes: Alum Front pivot, 1/2 oz in nose, 1/2 in front of tower, alum rear pivot
Use LOSA2123 or LOSA2128 rear hubs