

DATE: 7/29/99DRIVER: XXX
START UP.TRACK: KAUMA
FINLAND

FRONT SUSPENSION


SPINDLE CARRIERS: ☐ 25°, ☒ 30°TOE-IN / ☐ TOE-OUT: 0RIDE HEIGHT: ARMS LEVELCAMBER: + 0SWAY BAR: ☒ NO, ☐ YES - SIZE: _____

OF WASHERS UNDER:

-STEERING BELLCRANK BALLSTUD 0-SPINDLE ARM BALLSTUD 0-FRONT INNER CAMBER BALLSTUD 2

NOTES: _____

FRONT SHOCKS

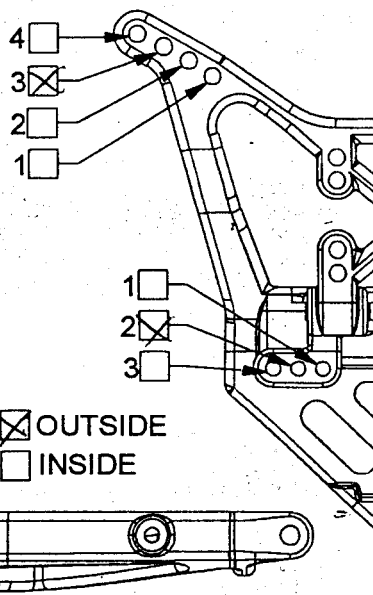
OIL: 30PISTON: 56 ☐ DRILLED / ☒ STANDARDSPRING: SILVERLIMITERS: INSIDE 0 OUTSIDE 0CARRIER
SPACERUP ☒DOWN ☐AXLE
SPACERINSIDE ☒OUTSIDE ☐

REAR SUSPENSION

ANTI-SQUAT: 0RIDE HEIGHT: IN BETWEEN BONES & ARMS LEVELCAMBER: + 0SWAY BAR: ☒ NO ☐ YES - SIZE: _____WING: FOWARD ☐ BACK ☒UP ☒ DOWN ☐HUBS: FOWARD ☐ CENTER ☒ BACK ☐DRIVE SHAFTS: DOGBONES ☒ CVD'S ☐OUTDRIVES: STEEL ☒ PLASTIC ☐

NOTES: _____

REAR SHOCKS

OIL: 25PISTON: 570 ☐ DRILLED / ☒ STANDARDSPRING: YellowLIMITERS: INSIDE 0 OUTSIDE 0FRONT TIRE: ?REAR TIRE: ?BATTERY PLACEMENT: FOWARDMOTOR: EXAMPLE 13x3PINION GEAR: 24SPUR GEAR: 84