



Setup Sheet

Track: 2000 ROAR Stock Nationals

Driver: Chris Bridgewater

Date: July 23, 2000

☐ Indoor
☒ Outdoor

☐ Smooth
☒ Rough

☐ Slippery
☐ High-Bite
☒ Blue-Groove

☐ Tight / ☒ Open

FRONT SUSPENSION (Circle or Check the Appropriate Settings)

Toe ☐ In ☐ Out 0°

Ride Height Arms just below level

Camber ☒ - ☐ + 1°


Caster ☒ Stock ☐ Other _____°

Sway Bar ☐ No ☐ Yes size _____



of washers under steering / tie-rod ball studs

Spindle ball stud: _____

Bellcrank ball stud: 1



of washers under ball stud 1

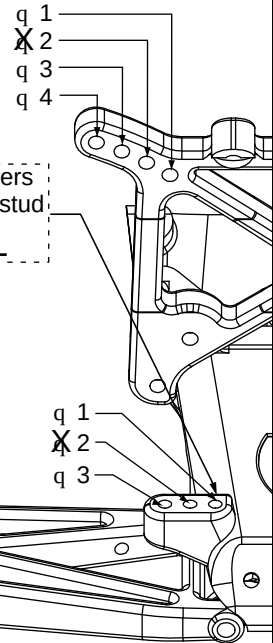

Spindle Location

☐ Top
☐ Middle
☒ Bottom

☐ Inside
☐ Middle
☒ Outside

☐ 1
☒ 2
☐ 3

Front Shocks

Oil: 35 wt Losi

Piston: 55 ☒ Standard / ☐ Drilled

Spring: Orange

Limiters: ☒ Inside- .050 ☐ Outside- 0

REAR SUSPENSION

Toe-In ☒ Inside 3°
☐ Outside _____°

Pivot Support 2 ☐ No Shim
☒ Shim Under Front ☐ Shim Under Rear > # of shims: 1

Ride Height Bones just below level



Camber ☒ - ☐ + _____°

Rear Hub Spacing ☐ Forward
☒ Center ☐ Rear

Sway Bar ☒ No ☐ Yes size _____

Drive Shafts ☒ Dogbones ☐ Aluminum
☐ CVDs ☒ Steel

Outdrives ☒ Steel
☐ Plastic

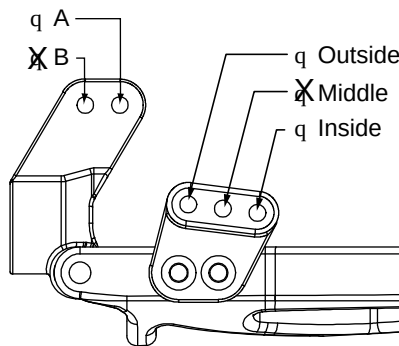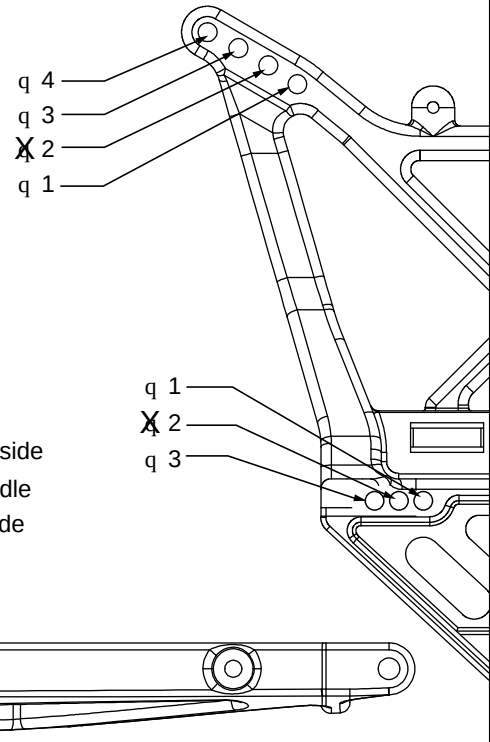

Rear Shocks

Oil: 30wt Losi

Piston: 56 ☒ Standard / ☐ Drilled

Spring: Red

Limiters: ☐ Inside- 0 ☐ Outside- 0

Tires

Front: 7505 Directional

Rear: 7641 T-2000

Compound

Silver

Red

Foam

Firm Losi

Firm Losi

Motor: Hand Out Pinion/Spur: 20 86

Battery Position: Middle

Notes: