


Name: Kenji Tsuruta		Date: 2/2/2013	Event:
City:		State:	
Track Conditions		Track: RC MANIAX ARENA	
☒ Indoor ☐ Outdoor	☒ Tight ☐ Open	☒ Smooth ☐ Rough	☒ Hard Packed ☐ Loose/Loamy
☐ Blue Groove ☐ Dry	☒ Wet ☐ Dusty	☐ Grass ☐ Astro Turf	☐ Low Bite ☒ Med Bite ☐ High Bite ☐ Other _____

Front Suspension

Toe: 0 Degree
 Ride Height: 24mm
 Camber: -1 Degree
 Caster: ☐ 0° ☐ 3° ☒ 5° ☐ 10°
 Kick Angle: ☐ 20° ☒ 25° ☐ 30°
 Sway Bar: NO
 Oil: 27.5wt
 Piston: 55
 Spring: Red
 Spindle Type: ☐ Inline ☒ Trailing
 Shock Limiters: 3mm
 Shock Location: #2 on Tower, Middle on Arm
 Bump Steer: 1mm
 Camber Link: 1

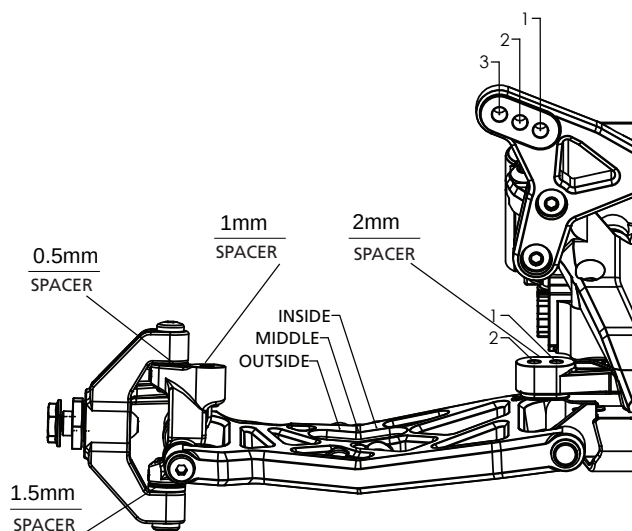


Notes: TLR1107 spindle set 4mm Trail
 TLR2059 aluminum front camber block

Translation: Arn0

Rear Suspension


Chassis Configuration: ☒ Rear Motor ☐ Mid Motor
 Toe: 3.5 Degree
 Anti-Squat: 2.5 Degree
 Roll Center: ☒ Low Roll Center (LRC) ☐ High Roll Center (HRC)
 Ride Height: 24mm
 Camber: -1.5 Degree
 Rear Hub Spacing: Middle
 Hex Width: +1.5mm Hex TLR2932
 Sway Bar: NO
 Oil: 27.5wt
 Piston: 55
 Spring: Yellow
 Shock Limiters: NO
 Camber Link: 1/B
 Shock Locations: #2 on tower, inside on Arm
 Wing/Wickerbill: Middle
 Battery Position: Forward

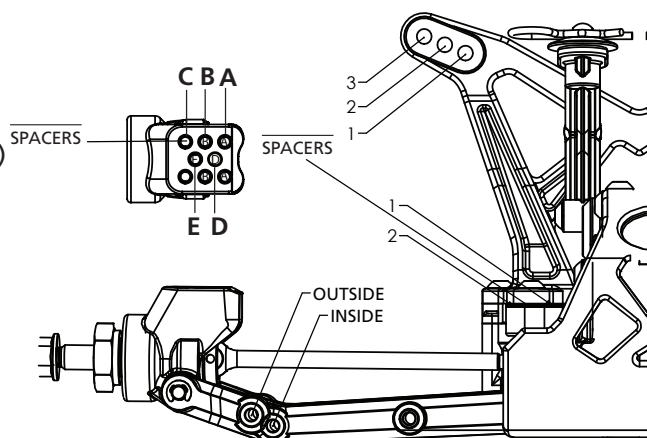

Electronics

Radio: <u>FUTABA 4PKS</u>	Timing Advance: _____
Servo: <u>BLS451</u>	Throttle/Brake Expo: _____
ESC: <u>SP Reventon-PRO</u>	Servo Expo: _____
Initial Brake: _____	Throttle/Brake EPA: _____
Drag Brake: _____	Motor: <u>SP V3.0 7.5T</u>
Throttle Profile: _____	Pinion: <u>20</u> Spur: <u>78</u>
	Battery: _____

Weight Placement
(Mark with "X")

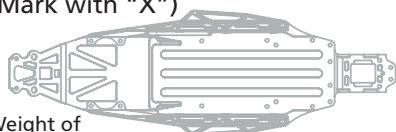

Weight of each piece _____ oz./g

Tires	Compound	Insert	Additive
Front: <u>Panther</u>	<u>Clay</u>	<u>Normal</u>	_____
Rear: <u>Panther</u>	<u>Clay</u>	<u>Tabata 2-Stage</u>	_____
Notes: TLR2060 aluminum rear camber block, TLR334000 breeder Shock Cap O-ring			
TLR5065 breeder aluminum shock cap			