

Name: _____		Date: _____		Event: _____	
City: _____		State: _____		Track: _____	
Track Conditions	☐ Indoor ☐ Outdoor	☐ Tight ☐ Open	☐ Smooth ☐ Rough	☐ Hard Packed ☐ Loose/Loamy	☐ Blue Groove ☐ Dry
	☐ Wet ☐ Dusty	☐ Grass ☐ Astro Turf	☐ Low Bite ☒ Med Bite	☒ High Bite ☐ Other	<u>Clay</u>

Front Suspension

Toe: -1°

Ride Height: 30mm

Camber: -1°

Caster: ☒ 0° ☐ 3° ☐ 5° ☐ 10°

Kick Angle: ☐ 20° ☐ 25° ☒ 30°

Sway Bar: _____

Shock Type: ☐ Bladder ☒ Emulsion Oil: 27.5wt

Piston: 56


Spring: Pink

Shock Limiters: 3mm

Shock Location: 2 - Outside

Bump Steer: 0

Camber Link: 1

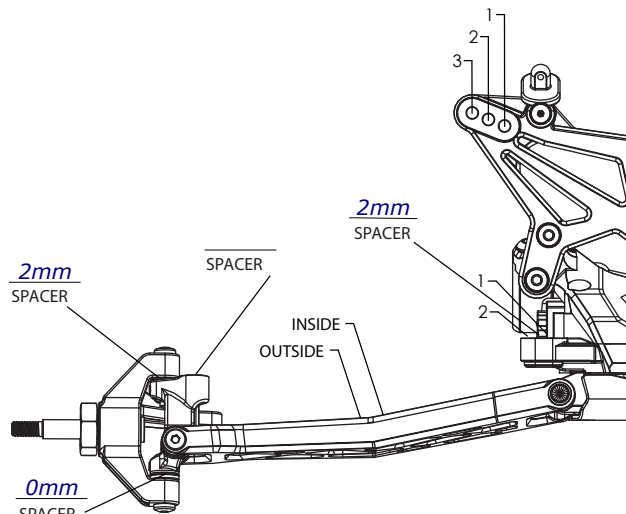

Notes: _____

Rear Suspension

Chassis Configuration: ☒ Rear Motor ☐ Mid Motor

Differential: ☒ Ball Diff ☐ Gear Diff Gear Diff Fluid: _____

Toe: 3°

Anti-Squat: 2°

Roll Center: ☒ Low Roll Center (LRC) ☐ High Roll Center (HRC)

Ride Height: 29mm

Camber: -1°

Rear Hub Spacing: _____

Hex Width: _____

Sway Bar: _____

Shock Type: ☐ Bladder ☒ Emulsion Oil: 27.5wt

Piston: 56

Spring: White (Truck) or Yellow (Buggy)


Shock Limiters: 0mm

Camber Link: 1 - C

Shock Locations: 3 - Inside

Wing: _____

Battery Position: _____

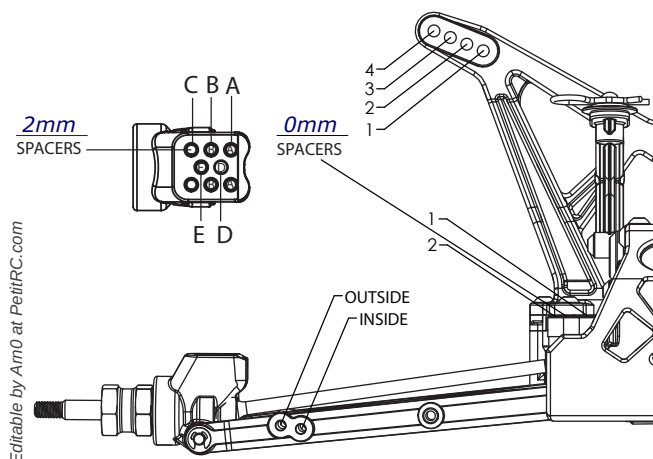

Electronics

Radio: _____	Timing Advance: _____
Servo: _____	Throttle/Brake Expo: _____
ESC: _____	Servo Expo: _____
Initial Brake: _____	Throttle/Brake EPA: _____
Drag Brake: _____	Motor: _____
Throttle Profile: _____	Pinion: _____ Spur: _____
	Battery: _____

Weight Placement
(Mark with "X")



Weight of
each piece _____ oz./g

Tires	Compound	Insert	Additive
Front: _____	_____	_____	_____
Rear: _____	_____	_____	_____
Notes: _____			