12R5.1

:: Driver: Naoto Matsukura :: Date: _____

:: Track: _____

:: Event: _____

Setup Sheet for Team Associated's 12R5.1

Reset Forms Rev. 1

:: Front Suspension

Kingpin Lube: none


Springs: 0.020"

Upper Arm Mounts: ☐ 0° ☐ 5° ■ 10°

Camber: 1.5mm


Caster:

thick thin



☐ 1.80°

thin thick



■ 3.25°

thick and thin



☐ 6.15°

Ride Height: 3.2mm

Notes: No front end brace, upper arm spaced in 1mm lower arm spaced 2mm

:: Rear Suspension

Side Spring: Black

T-Plate: _____

Ride Height Adjuster: _____


Ride Height: 3.1mm

Center Shock

Oil: AE 50wt


Spring: Gold

Position:



Side Shock

Oil: AE 20wt

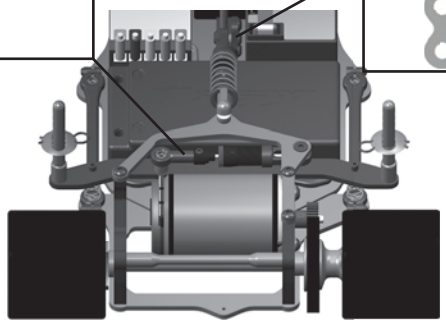

Notes: _____


:: Front Tires

Tire: Jaco Magenta

Diameter: 41.8mm

Wheel Type: Jaco Prism

Additive: mighty v2 + paragon groundeffects



Notes: 1/4 sauce


:: Rear Tires

Tire: Jaco Magenta

Diameter: 42.8mm

Wheel Type: Jaco Prism

Additive: mighty v2 + Paragon Ground Effects



Notes: Full sauce

:: Body

Body Type and Make: Black Art 002

Notes: _____

:: Track Info

smooth: ■ bumpy: ☐

traction: ■ high ☐ med. ☐ low

Notes: _____

:: Motor/Battery

Motor: Nosram 4.5T

Brush: _____ Spring: _____

Timing: -5 Gear: 23 / 88

Battery: yokomo 4400

Battery Position:

☐ Front ■ Back

:: Speed Control

S.C. : Nosram

S.C. Settings: 2/1/0/0

:: Transmitter

Turning Circle: _____

Steering Expo: _____

Brake E.P. : _____

Throttle Expo: _____

Notes: _____

:: For more setups, visit www.RC10.com and click on 'Racing'