12R5.2

::Driver: Patrick Miltat ::Date: 10-11.12.2011

::Track: ASMN Nantes

::Event: French Nationals Rd2

Setup sheet for Team Associated's 12R5.2

::Front Suspension

Ride height: 3.5mm

Upper arm mounts: ☐ 0° ☐ 5° ☑ 10°



☐ 1.80° ☑ 3.25° ☐ 6.15°

Camber: -1° Toe: 0°

Droop:

Bumpsteer shims: 1mm

King pin lube: 30k

Springs: 0.20

Front Brace: ☐ None ☐ Soft ☐ Hard

Front width:

Roll Center

Shims on top of the steering block: Full shims on top

Shims between bulkhead and caster block:

Notes:

::Rear Suspension

Ride height adjuster:

Chassis ride height: 4mm

Pod ride height: 4mm

Droop: 1mm

Rear width:

Shims under pivot:

Center damper

Brand: Associated

Spring: Gold

Oil: 35wt


Position: High ☑ Low



Side damper

Springs: Gold

Oil: 20wt

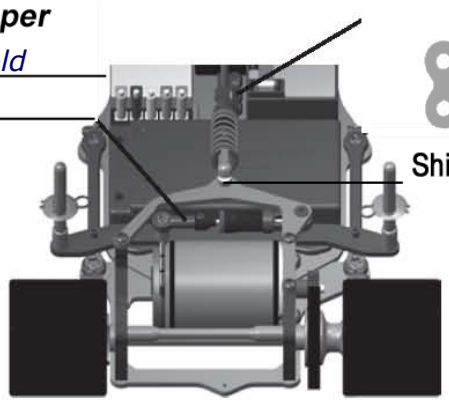

Shims: 2mm

Notes:

::Front Tires

Brand & compound: Jaco Magenta


Diameter: 41.8

Wheel: Jaco

Tire treatment: CS

Treatment time: 10min

Surface treated: 1/3



Notes:

::Rear Tires

Brand & compound: Jaco Magenta


Diameter: 43.8

Wheel: Jaco

Tire treatment: CS

Treatment time: 45min

Surface treated: Full



Notes:

::Body

Brand & model: Black Art BA004

Notes:

::Track Info

Composition: ☐ Asphalt ☑ Carpet

Surface: ☐ Smooth ☑ Bumpy

Traction: ☑ High ☐ Medium ☐ Low

Notes:

::Motor / Battery

Motor: PRT 5.0 Rotor:

Timing:

Pinion: Spur: 90

Rollout: 0.000

Battery: IP6000mAh

Plugs position: ☐ Front ☐ Back

::Speed Control

ESC: PRT10

Setting:

::Transmitter

Turning Circle:

Steering Expo:

Brake E.P.:

Throttle Expo:

Notes: