AWESOMATIX A12X

This form has been optimized for use with Adobe Acrobat.
Use of alternative PDF readers may result in formatting, display, or data entry issues.

SETUP SHEET
210426

NAME Sam Isaacs
RACE 2026 MonTech NYGP
TRACK 360v2
COUNTRY United States CLASS Modified

DATE 18.10.2026 TEMPERATURE AIR / TRACK 72F °C / 72F °C
SURFACE ASPHALT ☐ OUTDOOR ☐ INDOOR ☑ CARPET ☑
TRACK CONDITIONS BUMPY ☐ FLAT ☑ TECHNICAL ☐ MIXED ☐ FAST ☐
TRACTION LOW ☐ MEDIUM ☑ HIGH ☐

STEERING HUB POST
ST1208-C4S ☐ ST1208-C5AL ☐
ST1208-C5S ☐ ST1208-C5AL ☐
ST1208-C6S ☐ ST1208-C6AL ☐
CAMBER 1.25 deg °

SUSPENSION PLATE
C1205-X ☐ C1205AFS ☑
C1205-ZT ☐ C1205AFS-1.5 ☐
C1205-X-1.5 ☐ C1205AFS-5.0 ☐
C1205-6.0 ☐ OTHER


SERVO PLATE
C1201-X ☐ C1201AFS ☑
C1201-ZT ☐ C1201AFS-1.5 ☐
C1201 ☐ C1201AFS-5.0 ☐
OTHER

STEERING BLOCKS
AT1204-X ☑ OTHER
AT1204-ZTX ☐
BUMPSTEER SHIMS 2 mm

FRONT BUMPER
P1215 ☐
OTHER MXLR
SPACER 3 mm

REAR SPRING
SPR12XR-C0.8 ☐ SPR12X-C0.8L ☐
SPR12XR-C1.0 ☐ SPR12X-C1.0L ☑
SPR12XR-C1.2 ☐ OTHER

JOINT SET
LRC ☑ HRC ☐
ELRC ☐ EHRC ☐
JOINT SPACERS
FRONT 0.25 mm
REAR 0.5 mm

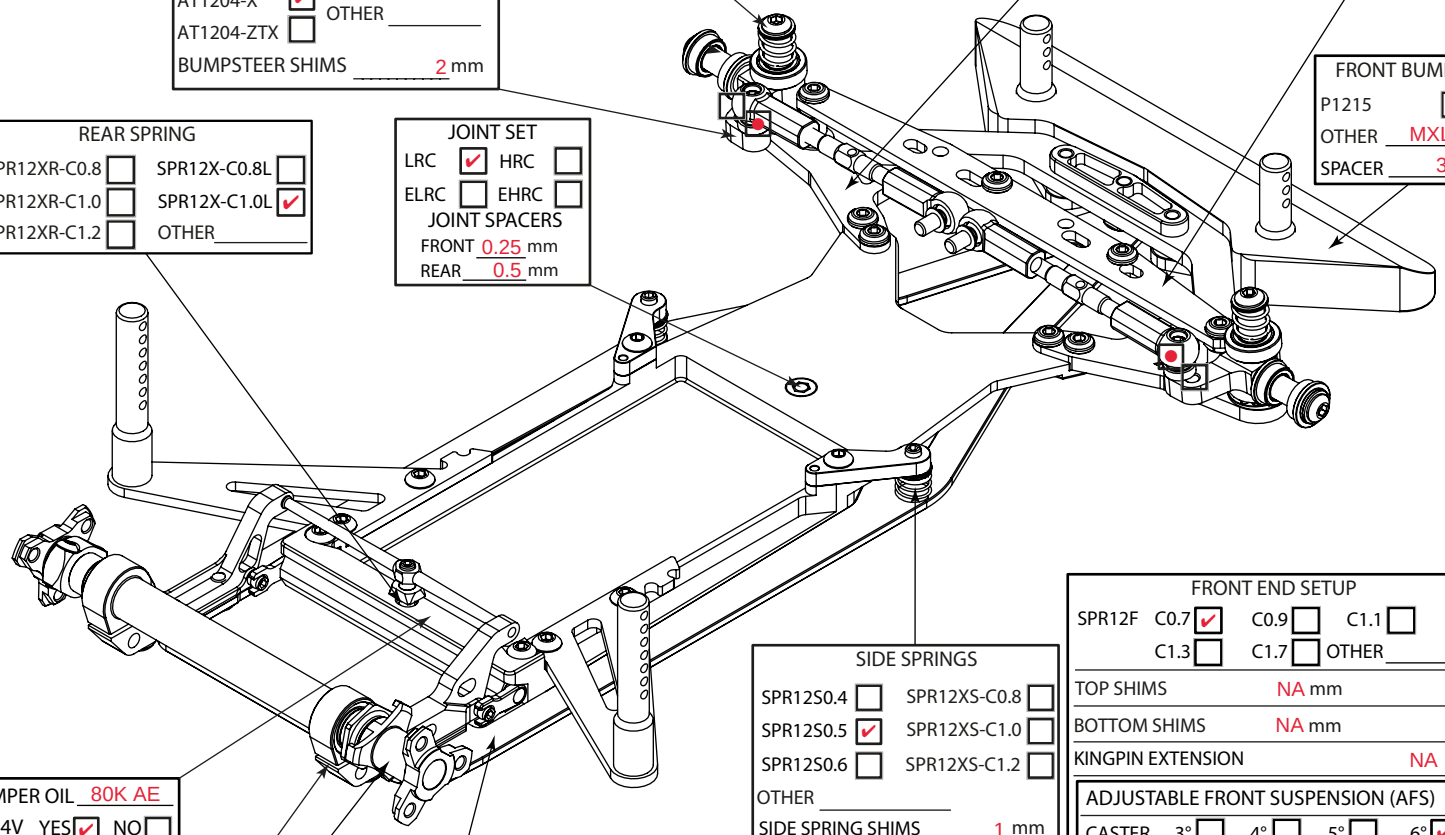

SIDE SPRINGS
SPR12S0.4 ☐ SPR12XS-C0.8 ☐
SPR12S0.5 ☑ SPR12XS-C1.0 ☐
SPR12S0.6 ☐ SPR12XS-C1.2 ☐
OTHER
SIDE SPRING SHIMS 1 mm
SIDE SPRING GAP 1 full turn per side mm

FRONT END SETUP
SPR12F C0.7 ☑ C0.9 ☐ C1.1 ☐ C1.3 ☐ C1.7 ☐ OTHER
TOP SHIMS NA mm pcs
BOTTOM SHIMS NA mm pcs
KINGPIN EXTENSION NA mm
ADJUSTABLE FRONT SUSPENSION (AFS) ☑
CASTER 3° ☐ 4° ☐ 5° ☐ 6° ☑
CAMBER 1.25 ° DROOP 0.8-0.9mm mm
SPRING PRELOAD front hub assemly 22.9mm in height mm
O-RINGS 0pcs ☑ 1pcs ☐ 2pcs ☐
O-RING TYPE NA
GREASE 10K MXLR

DAMPER OIL 80K AE
OR14V YES ☑ NO ☐

RIDE HEIGHT SPACERS 0.25 mm

REAR AXLE
SSS SPOOL ☑ BALL DIFF ☐
CS-1 SPOOL ☐ GEAR DIFF ☐
CARBON ☐ BRAND
STEEL ☐ OIL

OUTER FRAME
AM1204X-ST ☑
AM1204X-STS ☐
AM1204WC ☐
AM1204XT ☐


FRONT RIDE HEIGHT (FRH)	3.2 mm	FRONT DROOP (FD)	0.8-0.9mm mm
REAR RIDE HEIGH (RRH)	3.5 mm	REAR DOWNSTOP (RD)	1,60 mm
GAP UNDER DAMPER (GUD)	3.8 mm	TRACK WIDTH	
DOWNSTOP NUT GAP (DNG)	1.4 mm	FRONT	2mm inside each wheel mm
SPRING ROD HEIGHT (SRH)	mm	REAR	172.0 mm

BATTERY	Team EAM 9200
BATTERY PLUGS	FRONT ☑ BACK ☐
SERVO POSITION	LEFT ☐ RIGHT ☑
ESC POSITION	LEFT ☑ RIGHT ☐

SERVO	Sanwa PGS-HX
SERVO SAVER	Xray X-hard
SHIMS ON SERVO SAVER	2 mm
TOE OUT	0 °
STEER. TRAVEL	IN 24 ° OUT °

TIRES	FRONT	REAR
BRAND	Jaco	Jaco
TYPE	Mint	Mint
DIAMETER	39.70 mm	40.45 mm
GLUED SIDEWALLS	FRONT ☑	REAR ☐

ADDITIVE



FRONT 13 mm REAR
TIME 12 min TIME 30 min

MOTOR	Hobbywing G3 3.5T	TOTAL WEIGHT	741 grams
SPUR 88 PINION 24 ROLLOUT 34,66		F/R WEIGHT DISTRIBUTION	
ESC	Hobbywing XR10 Pro1s HD	RECEIVER	Sanwa RX 493i
ESC SETTINGS	Boosted	RADIO	Sanwa M17S
BODY	Montech M20	REAR BODY HEIGHT (SIDE DAMS)	82.0 mm
BEST LAPTIME	8.3	QUALIF / FINAL POSITION	2 / 4

COMMENTS:

MXLR electronics tray
rear tires double sauced at time of saucing fronts
damper read approximately 165 on Arrowmax diff checker
1 light coat of front glue only, slightly lower than edge of foam