

AWESOMATIX A800RR

SETUP SHEET

NAME	Timon Coenen	DATE	04-01-2025	TEMP. °C AIR / TRACK	/
RACE	Simply Fun Racing race 1 / Hudy series race 1	TRACK SURFACE		ASPHALT ☐	CARPET ☐
TRACK	MRC Vianen	TRACK LAYOUT	TECHNICAL ☑	MIXED ☐	FAST ☐
COUNTRY	Neherlands	TRACTION	LOW ☑	MEDIUM ☑	HIGH ☐
CLASS	17.5T				

FRONT

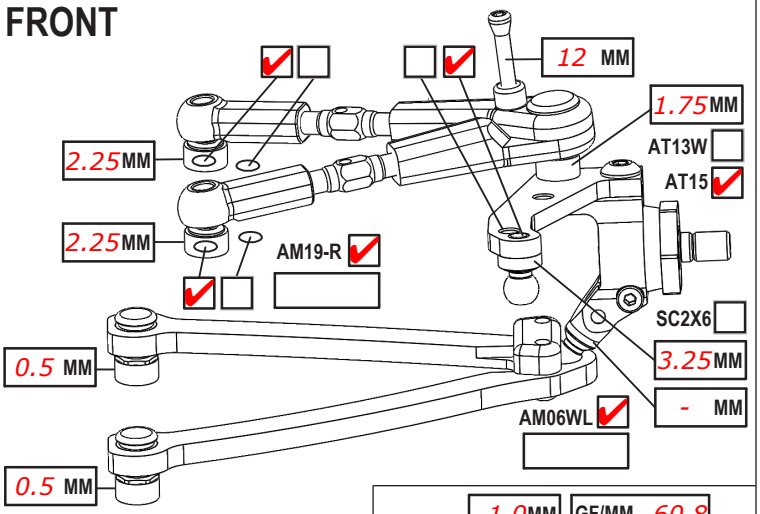

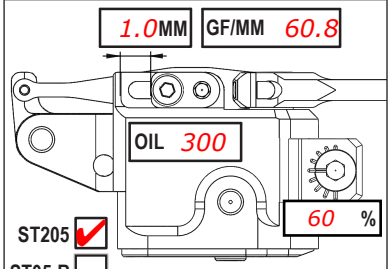



SHOCKS SETUP

CAMBER ANGLE / °	1.0
CASTER ANGLE / °	4.0
TOE ANGLE / °	1.0
RIDE HEIGHT / MM	5.0
DOWNSTOP / MM	6.1
UPSTOP / MM	32.2
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM14LS ☑	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	
DRIVE SPOOL ☑ DIFF ☐	
DRIVE POSITION DOWN ☑ UP ☐ +1 ☐	
DIFF OIL	DIFF SHIMS

DAMPER D4 ☑	
ROTOR 2 HOLES ☑	
SPRING STD ☐ S ☑	
SRS/RHS ARR. I ☑ II ☐	
PSS SETUP 30% ☑ 25% ☐ 15% ☐	
DAMPING LINEAR ☐ P1 ☐ P2 ☑	
DAMPER SPACER / MM	1.0
C45 YES ☑ NO ☐	

REAR

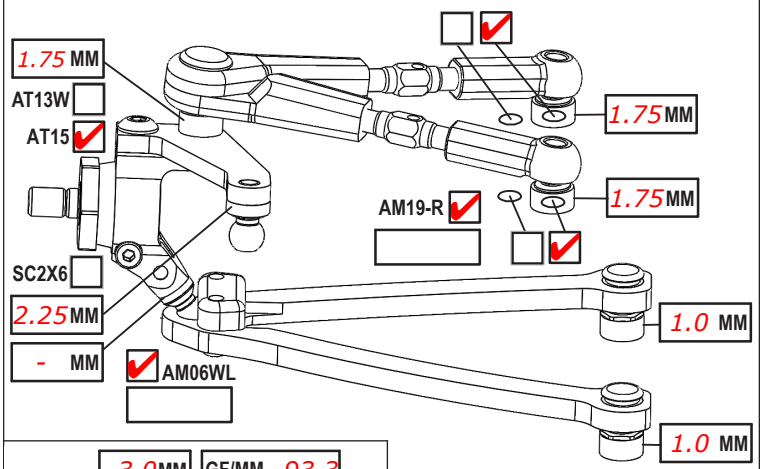

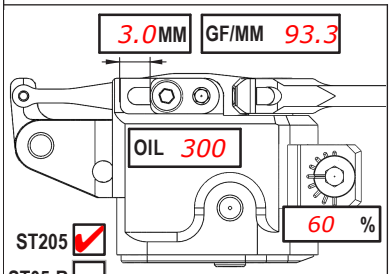


SHOCKS SETUP

CAMBER ANGLE / °	1.25
CASTER ANGLE / °	3.0
TOE ANGLE / °	2.0
RIDE HEIGHT / MM	5.2
DOWNSTOP / MM	4.3
UPSTOP / MM	32.2
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1 ☑	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	
DRIVE DIFF ☑	GD2B-R
DRIVE POSITION DOWN ☑ UP ☐ +1 ☐	
DIFF OIL 7k	DIFF SHIMS SH5X7X0.4

DAMPER D4 ☑	
ROTOR 2 HOLES ☑	
SPRING STD ☐ S ☑	
SRS/RHS ARR. I ☑ II ☐	
PSS SETUP 30% ☐ 25% ☐ 15% ☐	
DAMPING LINEAR ☐ P1 ☐ P2 ☑	
DAMPER SPACER / MM	1.0
C45 YES ☑ NO ☐	

CHASSIS FLEX AND WEIGHT SETTINGS

BW22-R ☑ ABH ☐ BW52-R ☐

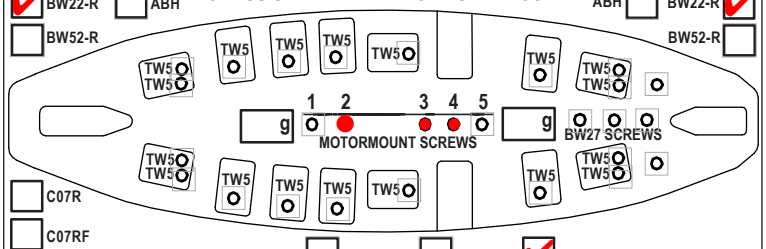


ABH ☐ BW22-R ☑ BW52-R ☐

C07R ☐ C07RF ☐

LOWER DECK C01B-RAF ☐ C01B-RC ☐ C01RS ☑ OTHER

BUMPER TOP PLATE CUT ☐ FRONT BUMPER P15L ☐ OTHER MXLR

C26 ☐ C26 ☐



TOP DECK CUTS ☐ ☐


FRONT TOP DECK C127 ☐ C127S ☑ OTHER

REAR TOP DECK C127 ☑ C127S ☑ OTHER

SINGLE TOP DECK C27MMX ☐ OTHER

BELT TENSIONER AM279 ☐ OTHER

BODY POSITION




BOTTOM WINDOW LINE TO BODY POST DISTANCE

FRONT BODY POST

ORING YES ☑ NO ☐

HOLE # 3

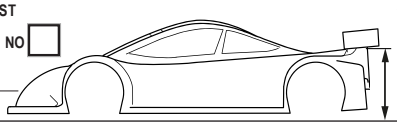


WINGLET YES ☑ NO ☐

REAR HRB SETTING / MM 5.5

SURFACE TO WING MOUNT DISTANCE / MM

TIRES	hudy C3 28
INSERTS	
SIDE WALLS GLUE Ø / MM F	R
ADDITIVE	Hudy 106260
TOTAL WEIGHT	1303
NOTES:	2x apply, 7:30min each time



TIME MIN. F 15 R 15

WEIGHT DISTRIBUTION % F 49.75 R 50.25

MOTOR LATERAL SHIFT / MM	0.0	SERVO	PowerHD GTS2
MOTOR	HW Justock 17.5t G2.1	SERVOHORN / HEIGHT	18mm
SPUR 102 PINION 43 RATIO 4.51		ACKERMANN POSITION	backwards
BODY	wolverine max 0.4	STEER TRAVEL IN 24 OUT	
WING	wolverine 0.7	BATTERY	EAM 5200
ESC	Ets HW XR10 stock spec	RECEIVER	Sanwa
ESC SETTING	blinky	RADIO	Sanwa M17
BEST LAPTIME	9.806	QUALIF./FINAL POSITION	2 / 2

COMMENTS: