

AWESOMATIX A800R — SETUP SHEET

NAME Monti
COUNTRY
RACE
TRACK Coral Spings FL

DATE 4/2 | TEMP. °C AIR / TRACK 85 / 140
TRACK SURFACE: ASPHALT ✓ | CARPET
TRACK LAYOUT: TECHNICAL | MIXED | FAST
TRACTION: LOW ✓ | MEDIUM ✓ | HIGH

FRONT

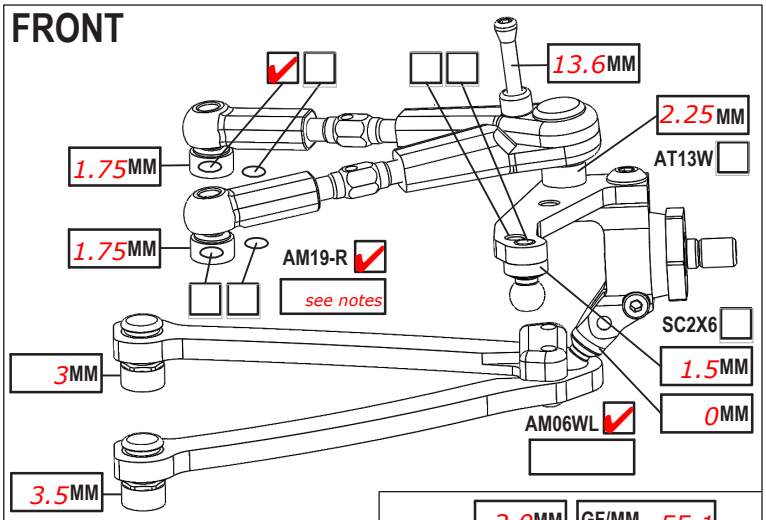

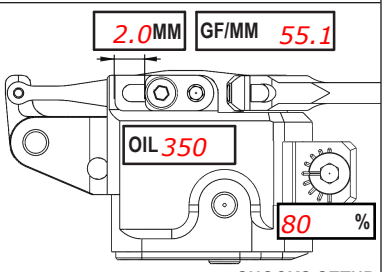



SHOCKS SETUP

CAMBER ANGLE / °	2
CASTER ANGLE / °	4
TOE ANGLE / °	1
RIDE HEIGHT / MM	5.3
DOWNSTOP / MM	5.2
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION	0 MM
STEER. ARM AM14LS ✓	
WHEEL SPACER / MM	0
DRIVE SPOOL ✓ DIFF ☐	
DRIVE POSITION UP ✓ DOWN ☐	
DIFF OIL	DIFF SHIMS

DAMPER D3 ✓	PT oil
ROTOR 2 HOLES ✓	
SPRING STD ✓ S ☐	
SRS/RHS ARR. I ☐ II ✓	
PSS SETUP 25% ✓ 15% ☐	
DAMPING LINEAR ☐ PROGRESSIVE ✓	
C45 YES ✓ NO ☐	
2ND SPRING SPR-P1 ☐	

REAR

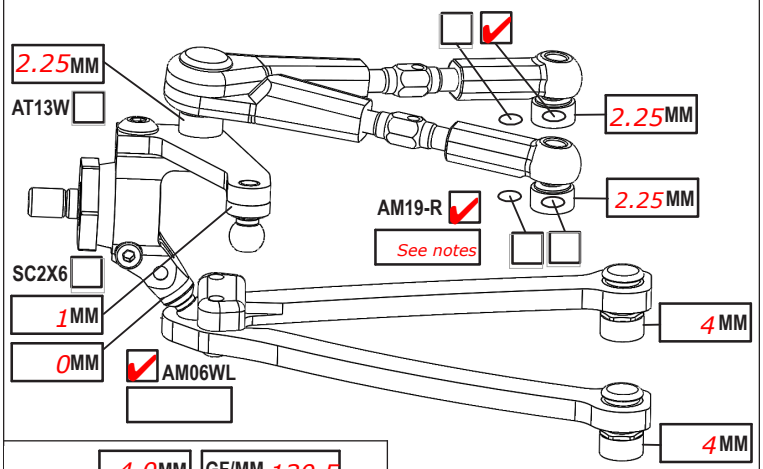

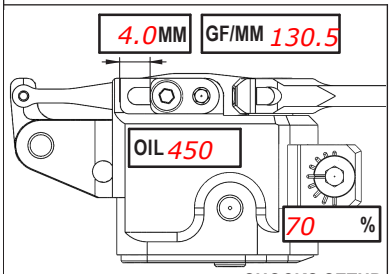


SHOCKS SETUP

CAMBER ANGLE / °	2
CASTER ANGLE / °	-4
TOE ANGLE / °	3
RIDE HEIGHT / MM	5.7
DOWNSTOP / MM	5
ANTI-ROLL BAR Ø / MM	1.3
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION	0 MM
STEER. ARM AM23-R ☐	AM23-1
WHEEL SPACER / MM	0
DRIVE (surprise us)	
DRIVE POSITION UP ✓ DOWN ☐	
DIFF OIL 6	DIFF SHIMS small

DAMPER D3 ✓	PT oil
ROTOR 2 HOLES ✓	
SPRING STD ✓ S ☐	
SRS/RHS ARR. I ✓ II ☐	
PSS SETUP 25% ☐ 15% ✓	
DAMPING LINEAR ☐ PROGRESSIVE ✓	
C45 YES ☐ NO ✓	
2ND SPRING SPR-P1 ☐	

CHASSIS FLEX AND WEIGHT SETTINGS


BW22 ✓ BW52 ☐ | BW22 ✓ BW52 ☐

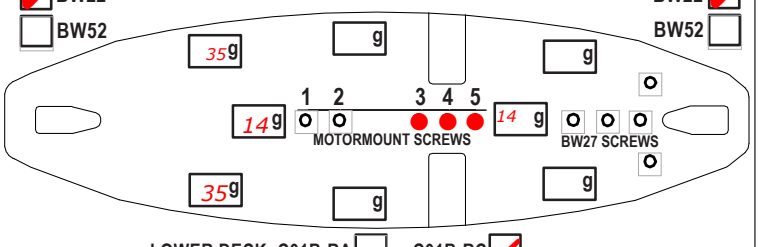

LOWER DECK C01B-RA ☐ C01B-RC ✓

BUMPER TOP PLATE CUT ☐

C26 ☐ C26 ☐



FRONT TOP DECK C127S ☐ C127 ☐ REAR TOP DECK C127S ☐ C127 ☐

SINGLE TOP DECK C27MMX ✓

TIRES

TIRES xpress 40
INSERTS
WHEELS
ADDITIVE MG yellow TIME - FR RR
TOTAL WEIGHT 1326 WEIGHT DISTRIBUTION F 51 % R 49 %
NOTES: Heat 5 min before run

MOTOR LATERAL SHIFT / MM	ACKERMANN SHIMS / MM
MOTOR Maclan	SERVO MkS
SPUR PINION 1 RATIO 0.00	STEER TRAVEL IN OUT
BODY Twister Special	BATTERY
WING Hard Special	RECEIVER Sanwa
ESC Maclan	RADIO Sanwa
ESC SETTING	
BEST LAPTIME 12.9	QUALIF./FINAL POSITION /

COMMENTS:

Upper links mounted in uppder deck bulk head holes for the inside locations.
Try 425 cts in the rear
Once track was sprayed with vht this set up pushed, remove rear pss