
AWESOMATIX A800RR

This form has been optimized for use with Adobe Acrobat.
Use of alternative PDF readers may result in formatting, display, or data entry issues.


NAME Michael Skeen
RACE 2026 MonTech NYGP
TRACK 360v2
COUNTRY United States CLASS 21.5T

DATE 18.10.2026 TEMP. °C AIR / TRACK 73F / 73F
TRACK SURFACE ASPHALT ☐ CARPET ☑
TRACK LAYOUT TECHNICAL ☐ MIXED ☐ FAST ☑
TRACTION LOW ☐ MEDIUM ☑ HIGH ☐

FRONT

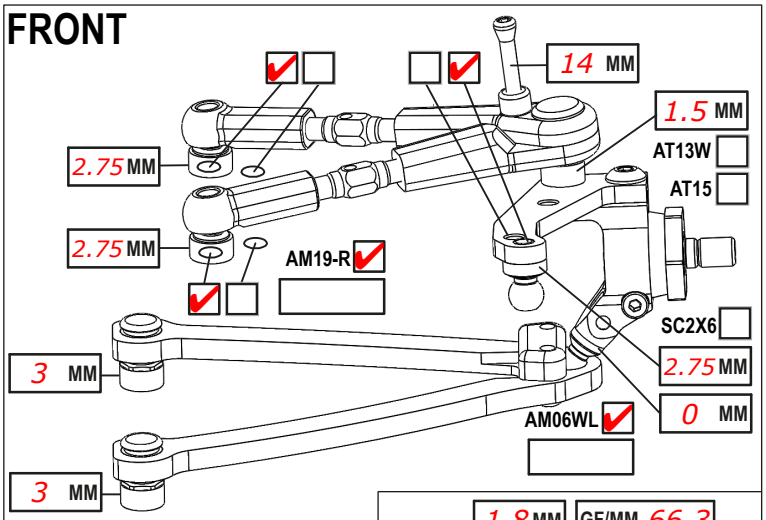


CAMBER ANGLE /° -1.75
CASTER ANGLE /° 4
TOE ANGLE /° 1 out
RIDE HEIGHT / MM 5.2
DOWNSTOP / MM 23.6
UPSTOP / MM 20.4
ANTI-ROLL BAR Ø / MM 1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
LOWER ARM EXTENSION / MM 0
STEER. ARM AM14LS ☐ MWAM14LSO
2ND SPRING SPR-P2 ☐ P1 ☐
WHEEL SPACER / MM
DRIVE SPOOL ☑ DIFF ☐
DRIVE POS. DOWN ☑ UP ☐ +1 ☐
DIFF OIL | DIFF SHIMS

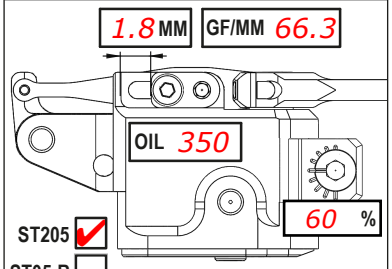


SHOCKS SETUP
DAMPER D4 ☑
ROTOR 2 HOLES ☑
SPRING STD ☐ S ☑
SRS/RHS ARR. I ☑ II ☐
PSS SETUP 30% ☐ 25% ☐ 15% ☐
DAMPING LINEAR ☐ P1 ☐ P2 ☑
DAMPER SPACER / MM 0
C45 YES ☐ NO ☑

REAR

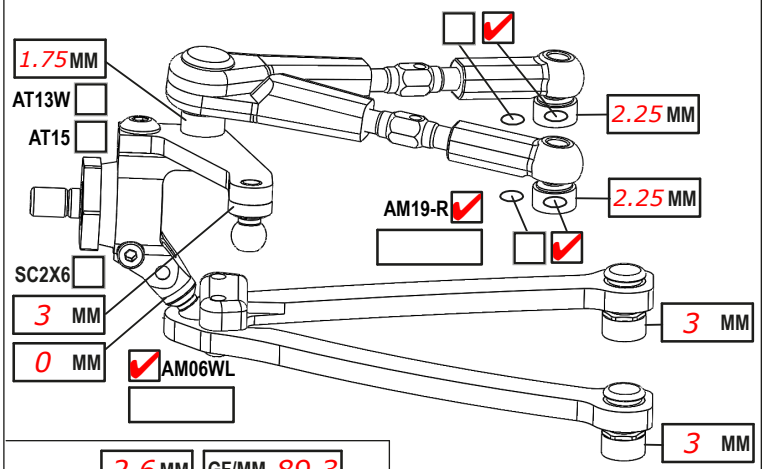


CAMBER ANGLE /° -2
CASTER ANGLE /° -2
TOE ANGLE /° -2.5 per side
RIDE HEIGHT / MM 5.2
DOWNSTOP / MM 23.2
UPSTOP / MM 21.6
ANTI-ROLL BAR Ø / MM 1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
LOWER ARM EXTENSION / MM 0
STEER. ARM AM23-1 ☑
2ND SPRING SPR-P2 ☐ P1 ☐
WHEEL SPACER / MM
DRIVE DIFF ☑
DRIVE POS. DOWN ☑ UP ☐ +1 ☐
DIFF OIL 7000 | DIFF SHIMS WA03

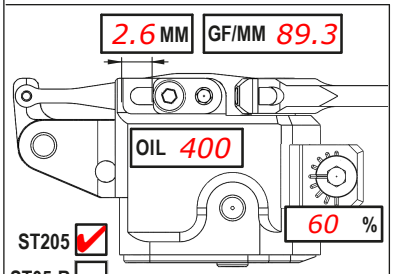


SHOCKS SETUP
DAMPER D4 ☑
ROTOR 2 HOLES ☑
SPRING STD ☐ S ☑
SRS/RHS ARR. I ☑ II ☐
PSS SETUP 30% ☐ 25% ☐ 15% ☐
DAMPING LINEAR ☐ P1 ☐ P2 ☑
DAMPER SPACER / MM 0
C45 YES ☐ NO ☑

CHASSIS FLEX AND WEIGHT SETTINGS

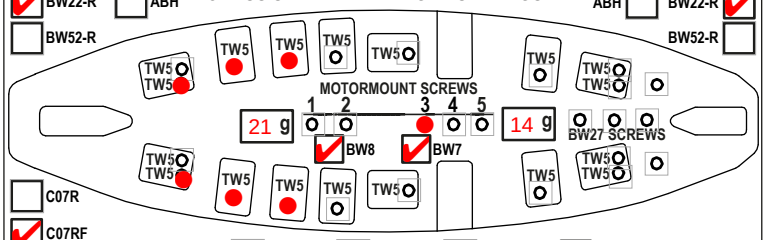


BW22-R ☐ ABH ☐ BW52-R ☐
ABH ☐ BW22-R ☑ BW52-R ☐
C07R ☐
C07RF ☑
LOWER DECK C01B-RAF ☐ C01B-RC ☐ C01B-RS ☐ C01B-RSL ☑ OTHER
BUMPER TOP PLATE CUT ☐ FRONT BUMPER P15L ☐ OTHER MAX-09-005
C26 ☐ C26 ☐



FRONT TOP DECK C127 ☐ C127S ☐ OTHER MW16EA
REAR TOP DECK C127 ☐ C127S ☐ OTHER MWN15
SINGLE TOP DECK C27MMX ☐ OTHER
BELT TESIONER AM279 ☐ OTHER

TIRES Gravity Gold
INSERTS Gravity
SIDEWALLS GLUE Ø / MM F 59 R
ADDITIVE SXT
TOTAL WEIGHT 1305 WEIGHT DISTRIBUTION % F 51 R 49
NOTES: 14g under receiver 8g behind receiver




TIME MIN. F 8 R 8

MOTOR LATERAL SHIFT / MM
MOTOR Hobbywing G5 21.5 TQ
SPUR 88 PINION 47 RATIO 3.56
BODY Zoo Wolverine, ZR-0015-04
WING SuperRad MX, SR-102-015
ESC Hobbywing G3X
ESC SETTINGS Blinky
BEST LAPTIME 10.69 QUALIF./FINAL POSITION 2 / 1

SERVO Sanwa PGS-LH II
SERVO HORN / HEIGHT SRFXR008 Sagami Mid Hole
ACKERMANN POSITION back
STEER. TRAVEL IN 24 OUT
BATTERY Team EAM 5400
RECEIVER Sanwa 492
RADIO Sanwa M17

BODY POSITION



BOTTOM WINDW LINE TO BODY POST DISTANCE
FRONT BODY POSTS
ORING YES ☑ NO ☐
HOLE # 4
WINGLETS YES ☐ NO ☑
REAR HRB SETTING / MM N/A
SURFACE TO WING MOUNT DISTANCE / MM N/A

COMMENTS:

MAD Wurks 40mm adjustable and sliding fan shroud Takishima 40mm fan
MAD Wurks 1.6 EA top deck first bridge cut
MAD Wurks 1.6 c127s profile uncut
MAD Wurks Front steering arms custom aluminum 2 hole style like CF option amx part. Ran short links early swapped back to normal length.
MAD Wurks Vertical rear body mounts hole 12
Sortafast black wheel nuts and screws