
AWESOMATIX A800RR


SETUP SHEET

NAME	Lucas Urbain	DATE	29.03.2026	TEMP. °C AIR / TRACK	/
RACE	French Nats Rnd1	TRACK SURFACE		ASPHALT ☐	CARPET ☑
TRACK	TRCM	TRACK LAYOUT	TECHNICAL ☑	MIXED ☐	FAST ☐
COUNTRY	France	TRACTION	LOW ☐	MEDIUM ☑	HIGH ☐
	CLASS Mod				

FRONT

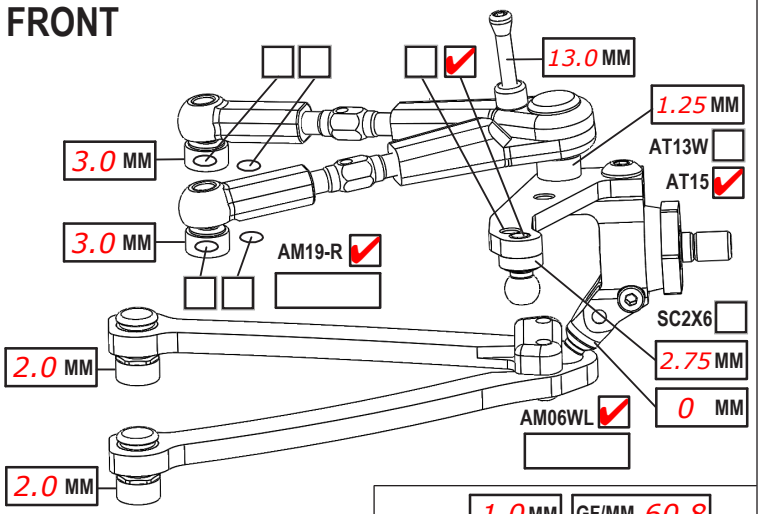


CAMBER ANGLE / °	1.5
CASTER ANGLE / °	4.5
TOE ANGLE / °	1.2
RIDE HEIGHT / MM	5.0
DOWNSTOP / MM	5.8
UPSTOP / MM	32.0
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM14LS ☑	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	0
DRIVE SPOOL ☑ DIFF ☐	
DRIVE POSITION DOWN ☑ UP ☐ +1 ☐	
DIFF OIL	DIFF SHIMS

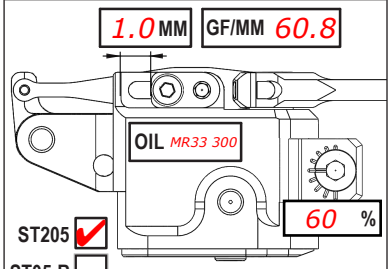


SHOCKS SETUP

DAMPER	D4 ☑		
ROTOR	2 HOLES ☑		
SPRING	STD ☐		S ☑
SRS/RHS ARR.	I ☑		II ☐
PSS SETUP	30% ☐	25% ☐	15% ☐
DAMPING LINEAR	☑	P1 ☐	P2 ☐
DAMPER SPACER / MM	ST237		
C45	YES ☐		NO ☑

REAR

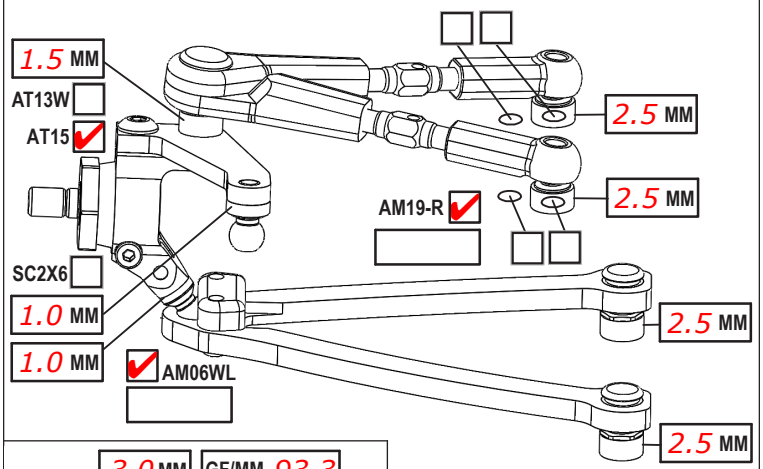


CAMBER ANGLE / °	1.5
CASTER ANGLE / °	7.0
TOE ANGLE / °	1.0
RIDE HEIGHT / MM	5.2
DOWNSTOP / MM	4.0
UPSTOP / MM	32.0
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1 ☑	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	0
DRIVE DIFF ☑	
DRIVE POSITION DOWN ☑ UP ☐ +1 ☐	
DIFF OIL MR33 8K	DIFF SHIMS SH5X7X0.4

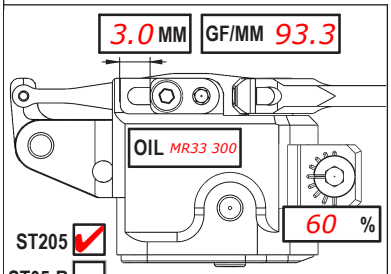

SHOCKS SETUP


DAMPER	D4 ☑		
ROTOR	2 HOLES ☑		
SPRING	STD ☐		S ☑
SRS/RHS ARR.	I ☑		II ☐
PSS SETUP	30% ☐	25% ☐	15% ☐
DAMPING LINEAR	☑	P1 ☐	P2 ☐
DAMPER SPACER / MM	ST237		
C45	YES ☑		NO ☐

CHASSIS FLEX AND WEIGHT SETTINGS

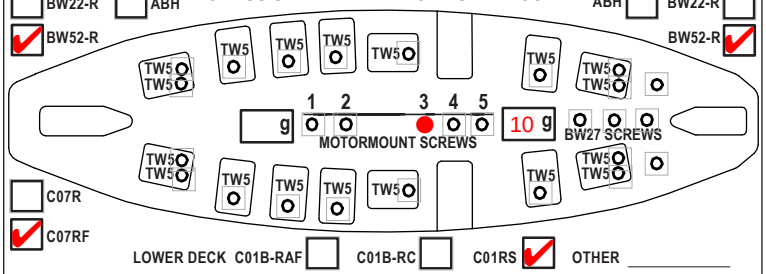

LOWER DECK C01B-RAF ☐ C01B-RC ☐ C01RS ☑ OTHER

BUMPER TOP PLATE CUT ☐ FRONT BUMPER P15L ☑ OTHER




FRONT TOP DECK C127 ☐ C127S ☐ OTHER C127S-1.6

REAR TOP DECK C127 ☐ C127S ☑ OTHER

SINGLE TOP DECK C27MMX ☐ OTHER

BELT TENSIONER AM279 ☑ OTHER

TIRES	Rush 28CPM
INSERTS	
SIDE WALLS GLUE Ø / MM	F 58.0 R /
ADDITIVE	MR33 V5
TOTAL WEIGHT	1300



TIME MIN. F 15 R 15

WEIGHT DISTRIBUTION % F 49 R 51

NOTES:

MOTOR LATERAL SHIFT / MM	0	SERVO	MKS HBL 575 SL
MOTOR	ORCA M4 5.0T	SERVOHORN / HEIGHT	17mm
SPUR 112 PINION 30 RATIO 7.09		ACKERMANN POSITION	Rearward
BODY	Ghibli 3 Light	STEER TRAVEL IN 25 OUT 16	
WING	Twister 0.5	BATTERY	ORCA 4400
ESC	ORCA Oe1 Mk2	RECEIVER	Sanwa RX492
ESC SETTING		RADIO	Sanwa M17
BEST LAPTIME	13.0	QUALIF./FINAL POSITION	1st / 1st

BODY POSITION

BOTTOM WINDOW LINE TO BODY POST DISTANCE 59 MM

FRONT BODY POST ORING YES ☑ NO ☐ HOLE # 4

WINGLET YES ☑ NO ☐

REAR HRB SETTING / MM 2.75

SURFACE TO WING MOUNT DISTANCE / MM

COMMENTS:

SB3X5AL Screws on top of the car
AT21-Ti - BS1-Ti - ST03-Ti
BW7+BW8
28g under receiver