
AWESOMATIX A800RR


SETUP SHEET

NAME	Jack Collins	DATE	6-7/12/25
RACE	EWS International	TEMP. °C AIR / TRACK	/
TRACK	International layout	TRACK SURFACE	ASPHALT ☐ CARPET ☑
COUNTRY	England	CLASS Mod	TRACK LAYOUT TECHNICAL ☐ MIXED ☑ FAST ☐
			TRACTION LOW ☐ MEDIUM ☑ HIGH ☑

FRONT

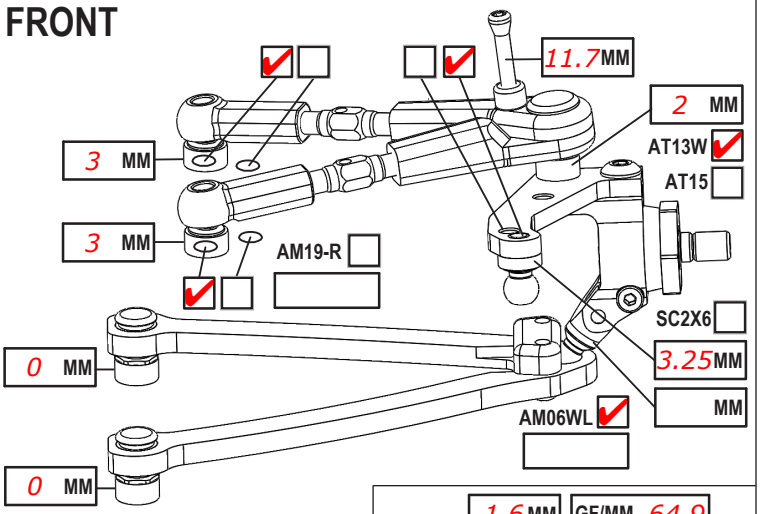

CAMBER ANGLE / °	1.5
CASTER ANGLE / °	5
TOE ANGLE / °	1.5
RIDE HEIGHT / MM	5.0
DOWNSTOP / MM	5.6
UPSTOP / MM	-
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM14LS ☐	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	
DRIVE SPOOL ☑ DIFF ☐	
DRIVE POSITION DOWN ☐ UP ☑ +1 ☐	
DIFF OIL	DIFF SHIMS

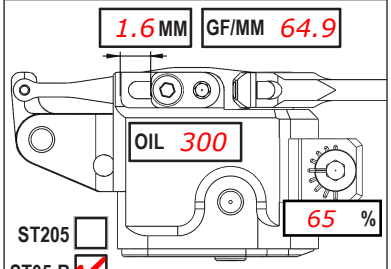


ST205 ☐
ST05-R ☑


SHOCKS SETUP

DAMPER	D4 ☑			
ROTOR	2 HOLES ☑			
SPRING	STD ☐		S ☑	
SRS/RHS ARR.	I ☑		II ☐	
PSS SETUP	30% ☑	25% ☐	15% ☐	
DAMPING LINEAR	☐	P1 ☐	P2 ☑	
DAMPER SPACER / MM	ST237			
C45	YES ☐		NO ☑	

REAR

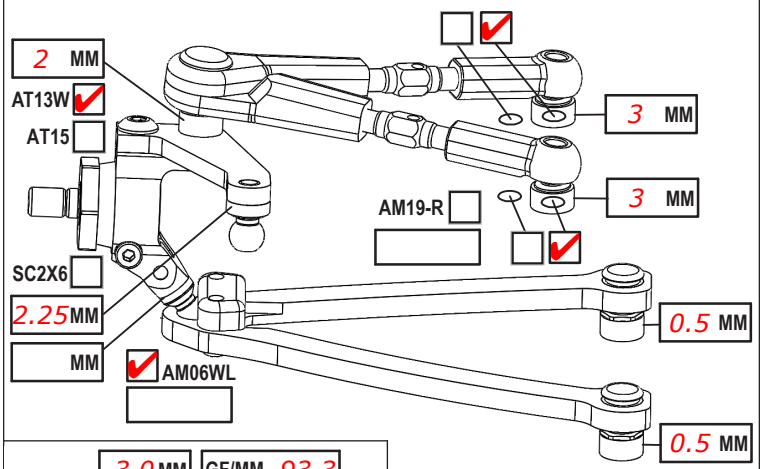

CAMBER ANGLE / °	1.5
CASTER ANGLE / °	3
TOE ANGLE / °	1.5
RIDE HEIGHT / MM	5.2
DOWNSTOP / MM	4.6
UPSTOP / MM	-
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1 ☑	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	
DRIVE DIFF ☑	
DRIVE POSITION DOWN ☐ UP ☐ +1 ☑	
DIFF OIL 8000	DIFF SHIMS std

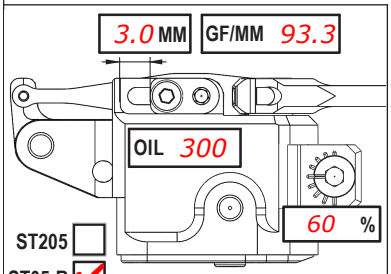


ST205 ☐
ST05-R ☑

SHOCKS SETUP


DAMPER	D4 ☑			
ROTOR	2 HOLES ☐			
SPRING	STD ☐		S ☑	
SRS/RHS ARR.	I ☑		II ☐	
PSS SETUP	30% ☐	25% ☐	15% ☐	
DAMPING LINEAR	☐	P1 ☐	P2 ☑	
DAMPER SPACER / MM	ST237			
C45	YES ☑		NO ☐	

CHASSIS FLEX AND WEIGHT SETTINGS

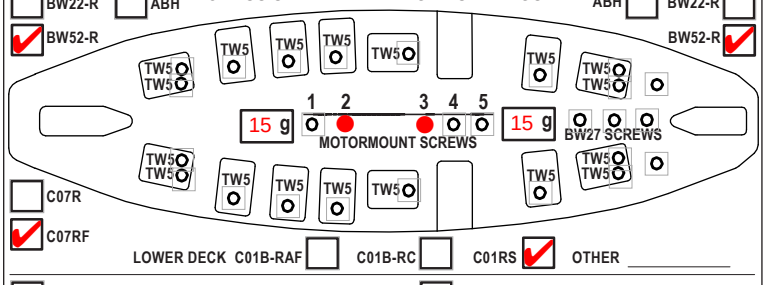

LOWER DECK C01B-RAF ☐ C01B-RC ☐ C01RS ☑ OTHER _____

BUMPER TOP PLATE CUT ☐ FRONT BUMPER P15L ☐ OTHER _____




FRONT TOP DECK C127 ☐ C127S ☑ OTHER _____

REAR TOP DECK C127 ☑ C127S ☑ OTHER _____

SINGLE TOP DECK C27MMX ☐ OTHER _____

BELT TENSIONER AM279 ☑ OTHER _____

TIRES	rush 30 controlled
INSERTS	
SIDE WALLS GLUE Ø / MM F	R
ADDITIVE	mr33 v5
TOTAL WEIGHT	1315g
NOTES:	keep additive wet




TIME MIN. F 15 R 15

WEIGHT DISTRIBUTION % F 49 R 51

MOTOR LATERAL SHIFT / MM		SERVO	power hd
MOTOR	hobbwing 5t	SERVOHORN / HEIGHT	15mm
SPUR 111 PINION 29 RATIO 7.27		ACKERMANN POSITION	backwrds
BODY	speciale 0.4	STEER TRAVEL IN 26 OUT	
WING	speciale 0.45	BATTERY	team ea 4200
ESC	hobbwing g2s	RECEIVER	rx-482
ESC SETTING	indoorsmod	RADIO	m17
BEST LAPTIME	14.0	QUALIF./FINAL POSITION	10th / 10th

BODY POSITION




BOTTOM WINDOW LINE TO BODY POST DISTANCE _____ MM

FRONT BODY POST

ORING YES ☐ NO ☑

HOLE # 4

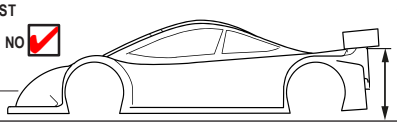

WINGLET YES ☑ NO ☐

REAR HRB SETTING / MM _____

SURFACE TO WING MOUNT DISTANCE / MM _____

COMMENTS:

AM19-LTL + 1mm
DT10+1.0 Bearing Housing
1up Racing Pro Duty Titanium Upper Screw Set
BEL351HD Heavy Duty Belt 351mm
SCC - Steel Chassis Conversion set