

AWESOMATIX A800R

SETUP SHEET

NAME	Jeff Rowland	DATE	12/10/2023	TEMP. °C AIR / TRACK	75 / 75
COUNTRY	Waynesboro, Pa, USA	TRACK SURFACE		ASPHALT ☐	CARPET ☑
RACE	2024 ROAR On Roar Carpet Nationals	TRACK LAYOUT	TECHNICAL ☑	MIXED ☑	FAST ☐
TRACK	997 RC Raceway	TRACTION	LOW ☐	MEDIUM ☑	HIGH ☐

FRONT

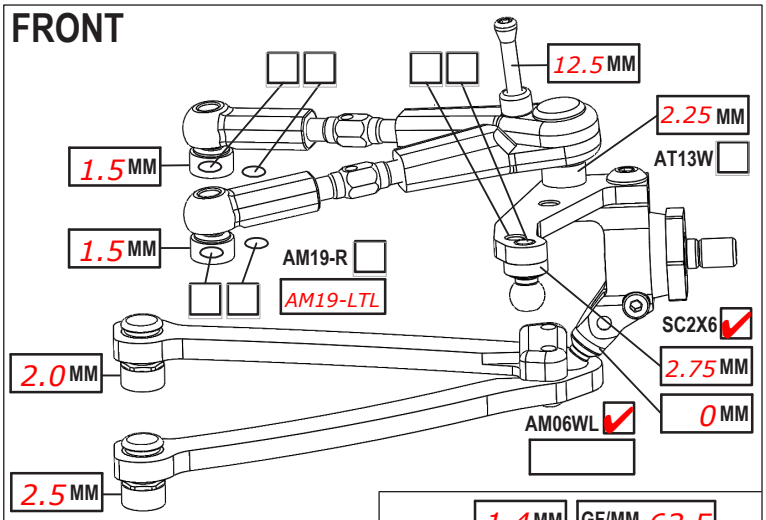

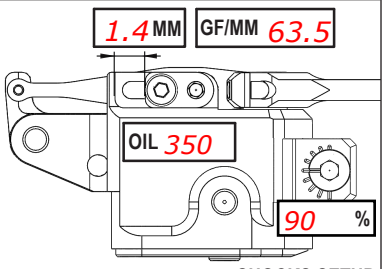



SHOCKS SETUP

CAMBER ANGLE / °	2.0
CASTER ANGLE / °	4
TOE ANGLE / °	1.0
RIDE HEIGHT / MM	5.4
DOWNSTOP / MM	5.8
ANTI-ROLL BAR Ø / MM	1.2
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION	0 MM
STEER. ARM AM14LS ☐	Avid
WHEEL SPACER / MM	0
DRIVE SPOOL ☑ DIFF ☐	
DRIVE POSITION UP ☐ DOWN ☑	
DIFF OIL	DIFF SHIMS

DAMPER D3 ☑	
ROTOR 2 HOLES ☑	
SPRING STD ☐ S ☑	
SRS/RHS ARR. I ☑ II ☐	
PSS SETUP 25% ☐ 15% ☐	
DAMPING LINEAR ☐ PROGRESSIVE ☑	
C45 YES ☐ NO ☑	
2ND SPRING SPR-P1 ☐	

REAR

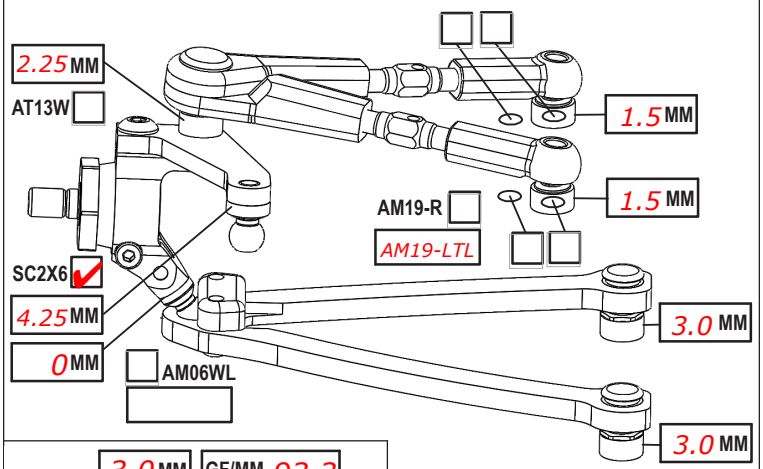

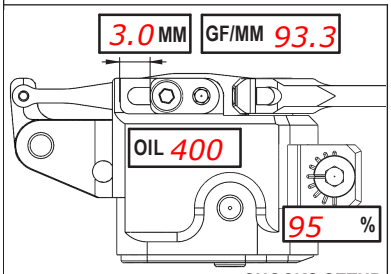


SHOCKS SETUP

CAMBER ANGLE / °	2.0
CASTER ANGLE / °	4 short
TOE ANGLE / °	2.5
RIDE HEIGHT / MM	5.6
DOWNSTOP / MM	5.4
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION	0 MM
STEER. ARM AM23-R ☐	AM23-1
WHEEL SPACER / MM	0
DRIVE (surprise us)	
DRIVE POSITION UP ☑ DOWN ☐	
DIFF OIL 12.5k	DIFF SHIMS .4


DAMPER D3 ☑	
ROTOR 2 HOLES ☑	
SPRING STD ☐ S ☑	
SRS/RHS ARR. I ☑ II ☐	
PSS SETUP 25% ☐ 15% ☐	
DAMPING LINEAR ☐ PROGRESSIVE ☑	
C45 YES ☑ NO ☐	
2ND SPRING SPR-P1 ☐	

CHASSIS FLEX AND WEIGHT SETTINGS

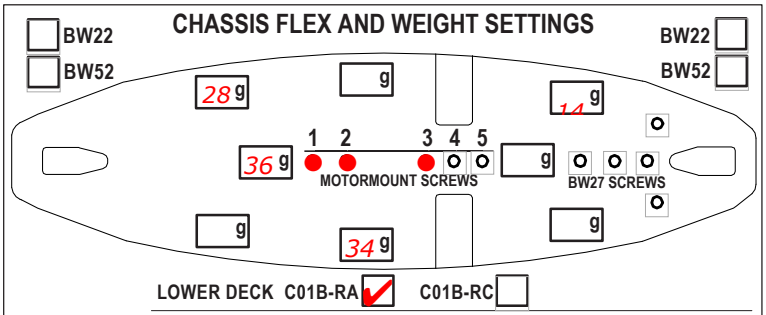

LOWER DECK C01B-RA ☑ C01B-RC ☐

BUMPER TOP PLATE CUT

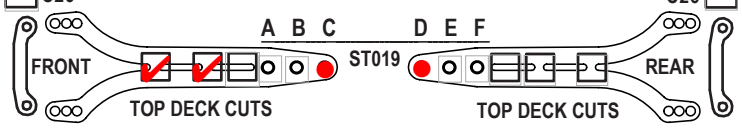

FRONT TOP DECK C127S ☑ C127 ☐ REAR TOP DECK C127S ☐ C127 ☑

SINGLE TOP DECK C27MMX ☐

TIRES

TIRES Gravity

INSERTS

WHEELS

ADDITIVE TIME - FR 20 RR 20

TOTAL WEIGHT 1335 WEIGHT DISTRIBUTION F 50 % R 50 %

NOTES: No glue

MOTOR LATERAL SHIFT / MM 0	ACKERMANN SHIMS / MM 3.5
MOTOR R1 17.5 Super Short	SERVO Sanwa
SPUR 94 PINION 47 RATIO 3.80	STEER TRAVEL IN 25 OUT
BODY Xtreme Twister 0.4	BATTERY Team EAM 6000 ULCG
WING Xtreme Twister 0.4	RECEIVER Sanwa
ESC R1 Digital-3 Super Stock	RADIO Sanwa
ESC SETTING Blinky	
BEST LAPTIME 9.270	QUALIF./FINAL POSITION 4 / 4

COMMENTS:

MR33 oil used in damper and diff; -1 lower arms used in front only; BW 7,8 and 10; ST05-R used, AMX USA flex chassis used

Note- AM19-LTL in +1 position

Body -- 4rd in front with one o-rings; 2.75 under hrb; 17mm with BS Works spacers