
DESTINY RACING TEAM — SET-UP SHEET — DTY-10

DATE	DEC/2024	TRACK	PYC HONG KONG
DRIVER	LOBO LO		☑ ASPHALT ☐ CARPET ☐ FLAT ☐ BUMPY
TRACTION	HIGH ☐ ☐ ☑ ☐ ☐ LOW	TEMP.	AIR / TRACK

EVENT	BEST LAP TIME	QUALIFYING POSITION	FINAL POSITION

FRONT

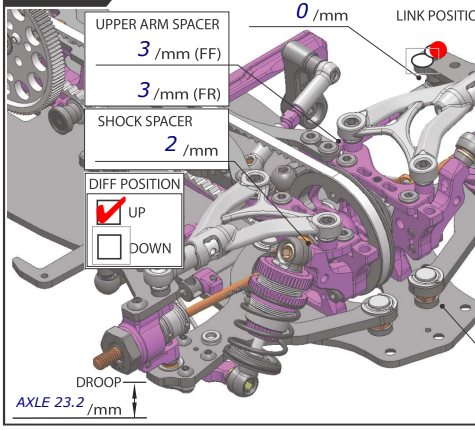

- LINKAGE SPACER: 0 /mm
- LINK POSITION
- BODY UPSTOP: /mm
- UPPER ARM SPACER: 3 /mm (FF), 3 /mm (FR)
- SHOCK SPACER: 2 /mm
- DIFF POSITION: ☑ UP ☐ DOWN
- SPACER: 3.5 /mm
- SPACER: 0 /mm
- TRACK WIDTH: 0mm +1mm
- ROLL-CENTER SPACER: 2 /mm (FF), 2 /mm (FR)
- DROOP: AXLE 23.2 /mm
- ACKERMANN
- LINKAGE POSITION
- CENTER PLATE: ☑ 8.5 ☐ 8.0


FRONT DIFF	
☑ SPOOL ☐ DIFF #	/CST
WHEEL HUB	☐ 4.0mm ☑ 5.0mm
WHEEL SPACER	/mm
SINGLE ARM ☑	DOUBLE ARM ☐

RIDE HEIGHT	5.2 /mm
CAMBER	1.5 °
CASTER	☑ 4° ☐ 5° °
SWAY BAR	☐ 1.2 ☑ 1.3 ☐ 1.4 ☐
TOE ANGLE	OUT 2 °

SHOCK ABSORBER

OIL	400 /CST
LENGTH	51.5 /mm
REBOUND	0 %
SPRING	☐ 2.5 ☐ 2.6 ☑ 2.7 ☐ AXON
ABSORBER MEMBRANE	KIT
PISTON	☐ PSS ☑ 4 HOLES

REAR

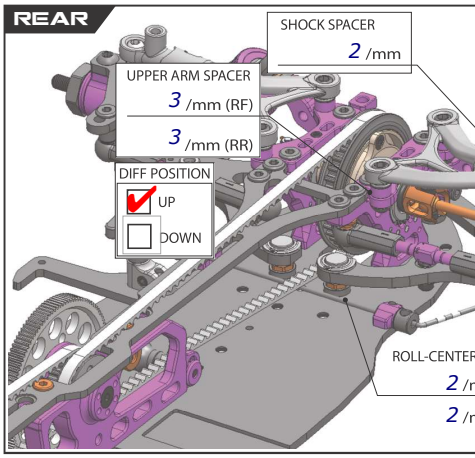


- SHOCK SPACER: 2 /mm
- UPPER ARM SPACER: 3 /mm (RF), 3 /mm (RR)
- DIFF POSITION: ☑ UP ☐ DOWN
- SPACER: 3.5 /mm
- LINKAGE SPACER: 0 /mm
- SPACER: 0 /mm
- DROOP: AXLE 22 /mm
- ROLL-CENTER SPACER: 2 /mm (RF), 2 /mm (RR)
- TRACK WIDTH: 0mm +1mm
- REAR LINK POSITION

DIFF OIL	
#	5000 /CST
WEIGHT	1.5 g
WHEEL HUB	☐ 4.0mm ☑ 5.0mm
WHEEL SPACER	

RIDE HEIGHT	5.4 /mm
CAMBER	1.5 °
CASTER	☑ 2.5° ☐ 3.5° °
SWAY BAR	☑ 1.2 ☐ 1.3 ☐ 1.4 ☐
TOE ANGLE	IN 2.5 °

SHOCK ABSORBER

OIL	400 /CST
LENGTH	51.5 /mm
REBOUND	0 %
SPRING	☐ 2.5 ☐ 2.6 ☑ 2.7 ☐ AXON
ABSORBER MEMBRANE	KIT
PISTON	☐ PSS ☑ 4 HOLES

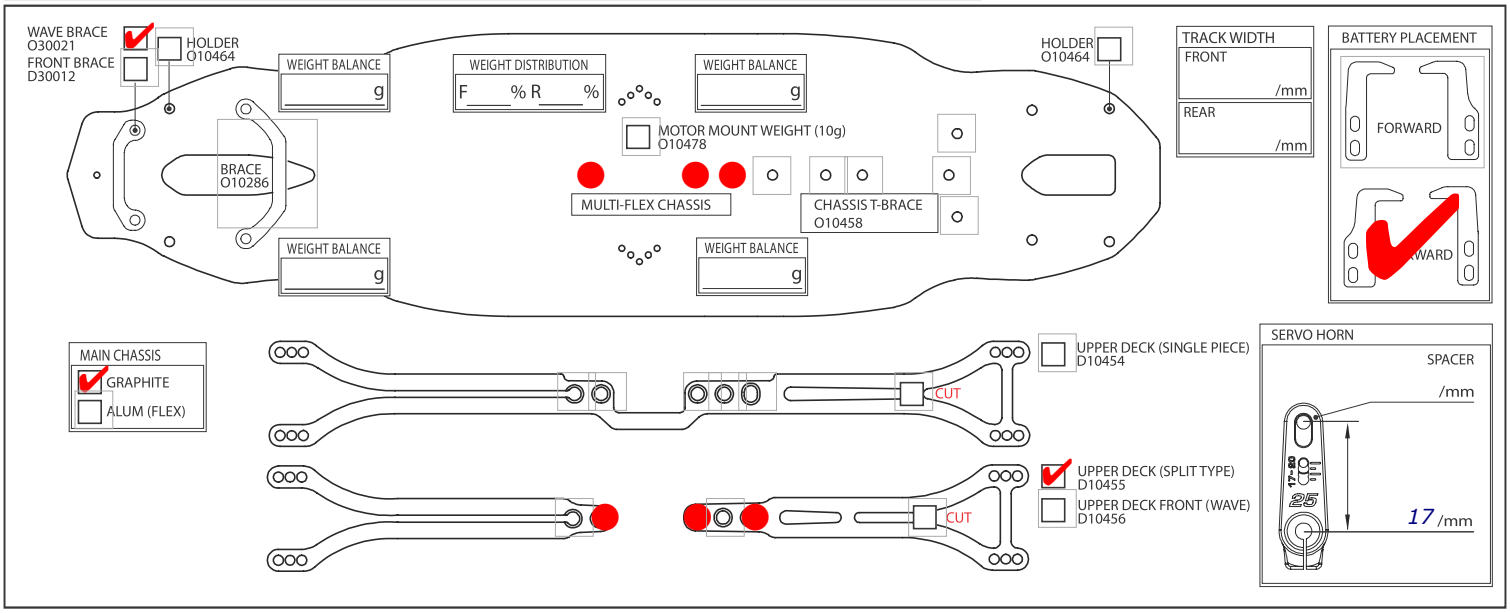

TIRE SETTINGS

FRONT & REAR

TIRE	TP SA-04-4M
INSERT	
WHEEL	
ADDITIVE	MR33 V3
ADDITIVE TIME	80 DEG / 15 /MINS

ADDITIVE AREA

FRONT LEFT | FRONT RIGHT

REAR LEFT | REAR RIGHT

MOTOR	ORCA MK2 4.5T	ROTOR	/mm	MOTOR TIMING	32 °
PINON GEAR	30 T	SPUR GEAR	110 T	FINAL RATIO	

ESC	ORCA	SETUP			
BATTERY	VOLTEX RACING ☐ SHORTY	BODY	XTREME SPECIALE TWISTER	TOTAL WEIGHT	1300 /g

NOTE