DRIVER DETAILS

NAME Matthew White
DATE 20 October 2013
EVENT EWS Round 1
WEATHER
RESULT Q4th F2nd

NOTES

Both rear braces
Cut wishbones.
25g in front of battery + servo.

CHASSIS AND ELECTRICS

CHASSIS 2mm quasi — Rear Motor ☒ Mid Motor ☐
TOP DECK both braces
BODYSHELL Protoform Speed 6
WING MR33
E.S.C GM - 2 Fixed timing
SERVO Sanwa SRG-BLS
RECIEVER Sanwa 451R
CELLS GM
CELL POSITION Foward ☐ Middle ☐ Rearward ☒

MOTOR AND GEARING

MOTOR GM 4.5
ROTOR DIAMETER std
TIMING std
GEAR PITCH 48DP ☐ 64DP ☒
SPUR SIZE 118
PINION SIZE 28


TRACK CONDITIONS

GRIP LEVEL High ☐ Medium ☒ Low ☐
TYPE Tight ☐ Open ☐ Mixed ☒
SURFACE Carpet ☒ Tarmac ☐
CONDITION Smooth ☒ Bumpy ☐
TEMPERATURE °C ☒ 22 °F ☐
VENUE Indoor ☒ Outdoor ☐


WHEELS, TYRES AND INSERTS

WHEELS Revlite
TYRES Sorex 32R
INSERTS JB
TYRE ADDITIVE Nosram
ADDITIVE TIME Front 20 Minutes Rear 40 Minutes
TYRE WARMERS Yes ☒ No ☐ Temp 50 °C Time 15 Minutes


REAR




☐ Ball Diff
☒ Gear Diff
Diff Oil 1300 cTs



☒ 3 Groove 39mm
☐ 4 Groove 37mm




☐ 0 Pip 3.0°
☒ 1 Pip 2.5°
☐ 2 Pip 2.0°




Alloy ☒ Steel ☐




☐ 1.1mm - Yellow
☒ 1.2mm - Red
☐ 1.3mm - Green
☐ 1.4mm - Blue
☐ 1.5mm - Grey
☐ 1.6mm - Orange



Washers 0.5 mm



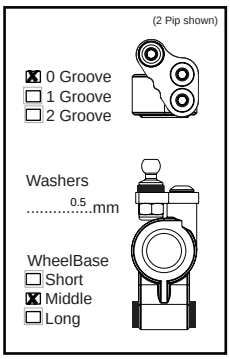


☒ 0 Groove
☐ 1 Groove
☐ 2 Groove

Washers 0.5 mm

WheelBase
☐ Short
☒ Middle
☐ Long


Droop 4.5 mm
On 10mm Block ☐

Ride Height 5.5 mm
Camber 2 Degree's

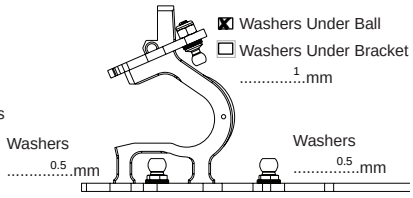


☒ Washers Under Ball
☐ Washers Under Bracket 1 mm

Washers 0.5 mm
Washers 0.5 mm

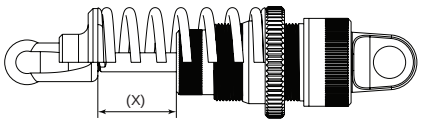


CAP TYPE Vented ☐ Sealed ☒ Emulsion ☐
OIL 500 cTs
SPRING Yokomo Blue
PISTON 3 hole
DRILLED Yes ☐ No ☒
DRILLED PISTON HOLE SIZE mm
SHOCK LENGTH (X) 10.8 mm
REBOUND 100 %


FRONT



☒ Spool
☐ Gear Diff
Diff Oil cTs



☒ 3 Groove 39mm
☐ 4 Groove 37mm





☒ 4° Yoke
☐ 6° Yoke




Yes ☐
No ☒
SERVO SAVER

Alloy ☐ Steel ☐ Double Joint ☒







☐ 1.1mm - Yellow
☐ 1.2mm - Red
☐ 1.3mm - Green
☒ 1.4mm - Blue
☐ 1.5mm - Grey
☐ 1.6mm - Orange



Washers 0 mm




Washers 0.5 mm

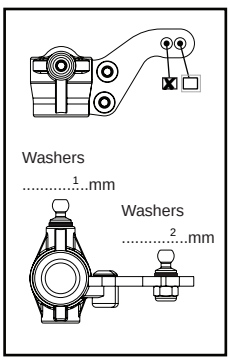

Washers 1 mm
Washers 2 mm


☐ Washers Under Ball
☐ Washers Under Bracket 0 mm

Washers 0.5 mm
Washers 0.5 mm



Droop 5 mm
On 10mm Block ☐

Ride Height 5.3 mm
Camber 1.5 Degree's
Toe-in Degree's
Toe-out Degree's

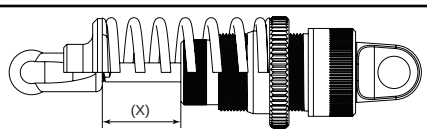

CAP TYPE Vented ☐ Sealed ☒ Emulsion ☐
OIL 500 cTs
SPRING Yokomo Blue
PISTON 3 hole
DRILLED Yes ☐ No ☒
DRILLED PISTON HOLE SIZE mm
SHOCK LENGTH (X) 10.8 mm
REBOUND 100 %