Driver Details

NAME	Olly Jefferies
DATE	
EVENT / TRACK	Newbury Test
WEATHER	
RESULT	
FASTEST LAP TIME	

NOTES

30g under battery
Inner screws on topdeck (4 places)
1.6g of diff oil

Chassis and Electrics

CHASSIS	Mid ☒	Alloy ☒	Carbon ☐
TOP DECK		Vertical ☐	Horizontal ☒
BODYSHELL	PF Type S PL		
WING	0.5mm		
E.S.C	Hobbywing		
SERVO	Highest		
RECEIVER	Sanwa		
LIPO	Sunpadow 5300		


Wheels, Tyres and Inserts

WHEELS				
TYRES				
INSERTS				
TYRE ADDITIVE				
ADDITIVE TIME	Front	Minutes	Rear	Minutes
TYRE WARMERS	Yes ☐	No ☐	Temp °C	Time Minutes

Track Conditions

GRIP LEVEL	High ☐	Medium ☒	Low ☐		
TYPE	Tight ☒	Open ☐	Mixed ☐		
SURFACE	Carpet ☒	Tarmac ☐			
CONDITION	Smooth ☒	Bumpy ☐			
AIR TEMPERATURE	°C	°F	TRACK TEMPERATURE	°C	°F
VENUE	Indoor ☒	Outdoor ☐			


Topdeck Options

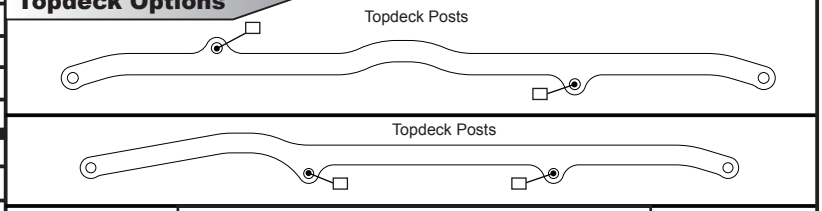

Motor and Gearing

MOTOR	Hobbywing 5.0T
ROTOR DIAMETER	12.3
TIMING	32.5°
GEAR PITCH	48DP ☒ 64DP ☐
SPUR SIZE	86
PINION SIZE	21

Front

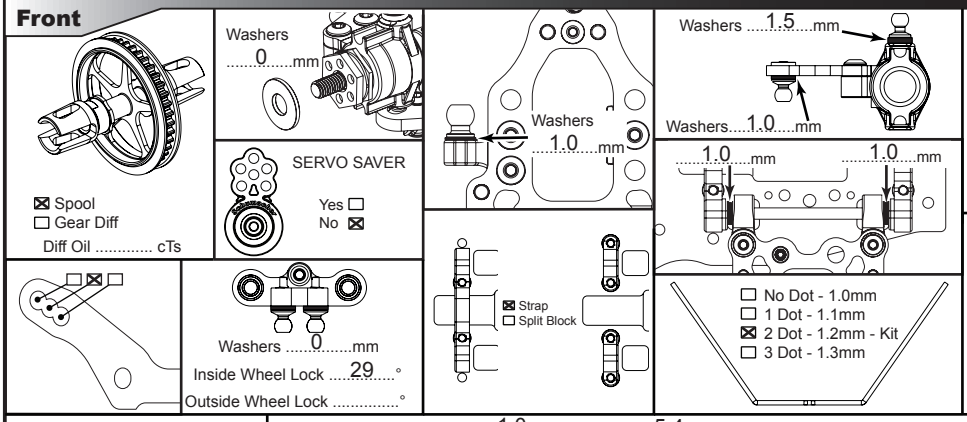

Cap Type Vented ☒ Sealed ☐ Emulsion ☐
Oil 400 cTs
Spring 2.5 - 2.8
Piston 1.1 x 4
Drilled Yes ☐ No ☒
Drilled piston Hole Size ..... mm
Shock Length (X) 10.5 mm
Rebound 0 %


☐ Narrow
☒ Medium (kit)
☐ Wide

Washers 1.0 mm
Washers 1.0 mm
Shims 0.5 mm
Shims 0.5 mm

Droop 5.4 mm (on 1.6mm droop gauge spacer)
Ride Height 5.2 mm
Camber 2.0 °
Toe 1.0 °

Pivot Pin Insert	Front	Rear
0.25 In	☒	☒
0.25 Out	☐	☐
0.75 In	☐	☐
0.75 Out	☐	☐

Rear

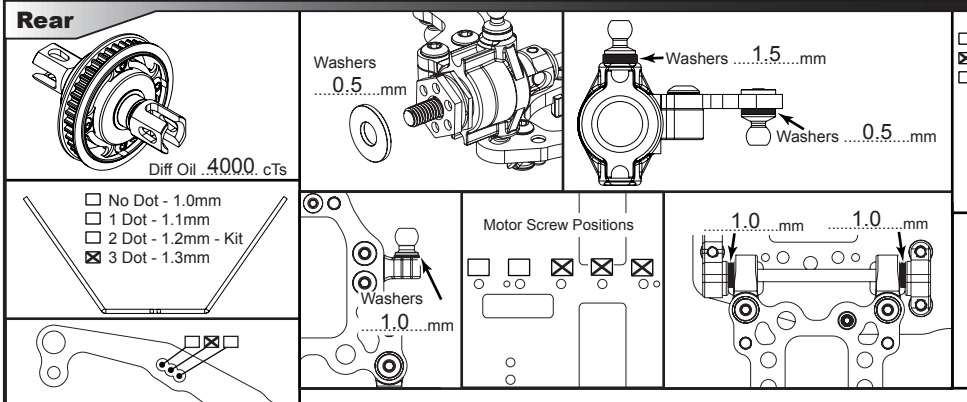

Cap Type Vented ☒ Sealed ☐ Emulsion ☐
Oil 400 cTs
Spring 2.6
Piston 1.1 x 4
Drilled Yes ☐ No ☒
Drilled piston Hole Size ..... mm
Shock Length (X) 10.5 mm
Rebound 0 %

☐ Narrow
☒ Medium (kit)
☐ Wide

Washers 1.0 mm
Washers 1.0 mm
Shims 1.0 mm
Shims 1.0 mm

Droop 4.4 mm (on 1.6mm droop gauge spacer)
Ride Height 5.4 mm
Camber 2.0 °
Toe 2.5 °

Pivot Pin Insert	Front	Rear
0.25 In	☐	☐
0.25 Out	☐	☐
0.75 In	☒	☒
0.75 Out	☐	☐

S1523iss1