Driver Details

Name Andy Sawyer
Date
Event / Track Derby (ETS carpet)
Weather cool
Result 3rd
Fastest Lap

Chassis and Electrics

Chassis Kit ☐ C/F ☐
Top Deck Kit ☐ C/F ☐ **Dowel** Yes ☐ No ☐
Bodyshell Montech Vision
Wing kit
ESC Arrowmax Dash V2
Servo KO RSx4 Grasper
Receiver KO KR420XT
LiPo IP5000 **Under LiPo Weight** g

Track Conditions

Grip Level High ☐ Medium ☐ Low ☐
Type Tight ☐ Open ☐ Mixed ☐
Surface Carpet ☐ Tarmac ☐
Condition Smooth ☐ Bumpy ☐
Air Temperature °C °F **Track Temperature** °C °F
Venue Indoor ☐ Outdoor ☐

Motor and Gearing

Motor Fantom 17.5
Rotor Diameter kit
Timing 48
Gear Pitch 48DP ☐ 64DP ☐
Spur Size 96
Pinion Size 45

Notes

MISSION FT
FRONT WHEEL DRIVE

1,000,000 front diff

Mi5 shocks all round

Ti screw kit, top half only
Ti turn buckles

Mi5 Alloy medium hex - rear
Mi5 Alloy wide hex - front


Option Builds

4WD Conversion Yes ☐ No ☐
Body Posts Horizontal ☐ Vertical ☐

Wheels, Tyres and Inserts

Wheels Ride
Tyres control - belted
Inserts conrtol
Tyre Additive CS High
Additive Time Front 20 Minutes Rear 20 Minutes
Tyre Warmers Yes ☐ No ☐ Temp °C Time Minutes


Front



Spool ☐
Gear Diff ☐
Diff Oil 1,000,000 cSt




Servo Saver
Yes ☐
No ☐
Inside wheel lock..... °
Outside wheel lock..... °

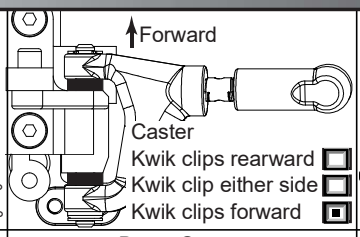



Caster
Kwik clips rearward ☐
Kwik clip either side ☐
Kwik clips forward ☐


Wheelbase
Short (Kit) ☐
Long ☐




Driveshaft
Kit ☐
Double Joint ☐









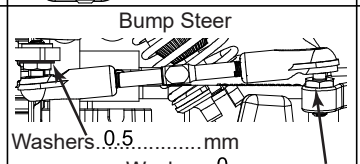


Bump Steer
Washers 0.5 mm
Washers 0 mm

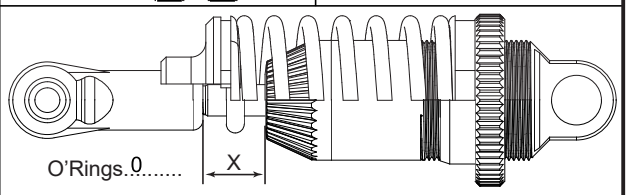


O'Rings 0
X



Washers 0 mm



Anti Roll Bar
Yes ☐
No ☐

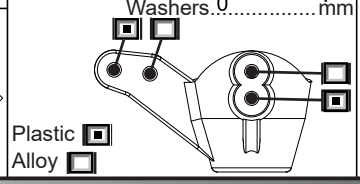


Plastic ☐
Alloy ☐


Ride Height 5 mm
Droop 3 mm
Camber 1 °
Toe 0.5 out °

Oil 300 cSt
Spring Core 2.2-2.9
Piston 3
Shock Length (X) mm
Rebound 50 %


Rear




None ☐
Gear Diff ☐
Diff Oil cSt





Wheelbase
Short (kwik clips rearward) ☐
Medium (Kit) ☐
Long (kwik clips forward) ☐




Bump Toe
Washers 1 mm
Washers 2 mm









Inboard Toe
2° (pip facing in) ☐
0° (pip facing out) ☐

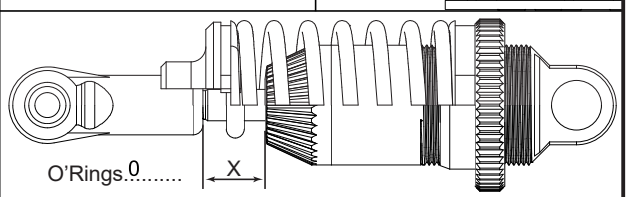


O'Rings 0
X



Washers 0 mm



Anti Roll Bar
Yes ☐
No ☐

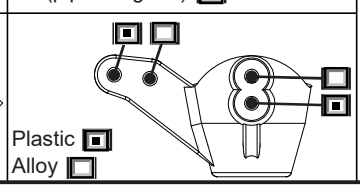

Plastic ☐
Alloy ☐

Ride Height 5.2 mm
Droop 1.5 mm
Camber 1 °
Toe 3 °

Oil 300 cSt
Spring Core 2.6
Piston 3
Shock Length (X) mm
Rebound 50 %