Driver and Event

Name	Tom Cockerill
Date	August '14
Event	Stotfold National
Weather	Dry, Warm
Result	Q3, F8

Electrics and Gearing

E.S.C	Nosram Comet HD
Servo	KO RSx2 Response
Reciever	KO
Batteries	Nosram 5800 Saddle
Motor	Nosram Pure 2 7.5
Spur Gear	98T [x] 95T [ ]
Pinion	18
LH Cell Position	Forward [ ] Backward [x]

Track Conditions

Surface	100% Astro
Grip Level	High
Track Condition	Bumpy, Jumps

Wheels and Tyres

Rear Wheels	Schumacher Hex (U4366)
Rear Tyre	Sch MiniSpike (U6558)
Rear Insert	Sch Medium (U6734)
Front Wheels	Schumacher Hex (U4496)
Front Tyre	Sch Yellow Stagger(U6770)
Front Insert	Sch Medium (U6733)

Diff Type

	Diff Oil
Front Ball [ ] Gear [x]	10,000
Rear Ball [ ] Gear [x]	10,000

Additional Settings

Car Weight	1825g
Weights Added	31g Between Cells
Chassis Carbon [ ]	Option [x]
Wing Gurney Height	Low Line mm

NOTES

CoreRC Springs & Oils
Alloy Chassis (U4147)
F.A.B. (U4133)
7.5Deg Yokes (U3404)

Front Shocks

Oil 450	Spring Red	Shock Cap Sealed [ ] Vented [ ] Emulsion [x]
Piston 3 Hole		
Drilled [ ]	Hole Size Std mm	



Shock Length 22.20 mm

Rear Shocks

Oil 350	Spring Red	Shock Cap Sealed [ ] Vented [ ] Emulsion [x]
Piston 3 Hole		
Drilled [x]	Hole Size 1.60 mm	



Shock Length 29.00 mm


Front Suspension

Anti roll bar No [x] 1.00 [ ] 1.20 [ ] 1.40 [ ] 1.60 [ ]


Camber at Ride Height -0.5 Deg


Toe-In +1.0 Deg

Ride Height 18 mm



Track Washers 1.0 mm

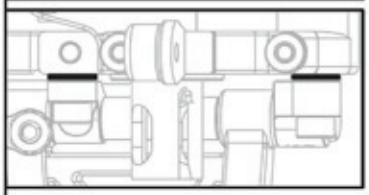


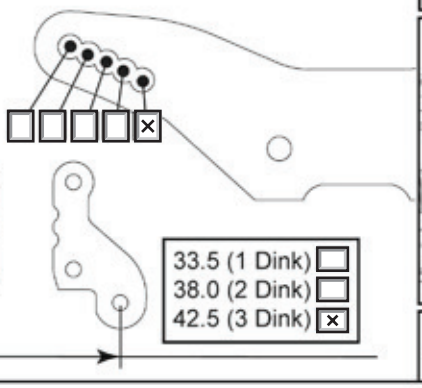

33.5 (1 Dink) [ ]
38.0 (2 Dink) [ ]
42.5 (3 Dink) [x]


Blocks Moulded [ ] Alloy [x]

Link Washers 0 mm



Front Rake
10.0 Deg [x] 7.5 Deg [ ]

Washers 2.0 mm



Front Yoke
12.5 [ ] (Kit 10.0) [ ] 7.5 [x]

Rear Suspension

Anti roll bar No [ ] 1.00 [ ] 1.20 [x] 1.40 [ ] 1.60 [ ]

Camber at Ride Height -1.0 Deg


Ride Height 20 mm


Wheelbase Short [ ] Med [ ] Long [x]

Rear Toe-in & Track Washers

- 0.00 Difference = 0.00° Toe-in [ ]
- 0.50 Difference = 0.60° Toe-in [ ]
- 1.00 Difference = 1.30° Toe-in [ ]
- 1.50 Difference = 1.95° Toe-in [ ]
- 2.00 Difference = 2.60° Toe-in [ ]
- 2.50 Difference = 3.25° Toe-in [•]
- 3.00 Difference = 3.90° Toe-in [ ]

Rear 3.0 mm Front 0.5 mm

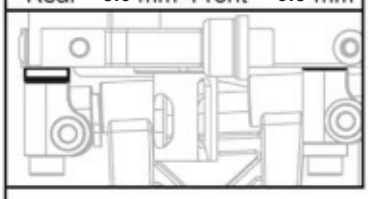

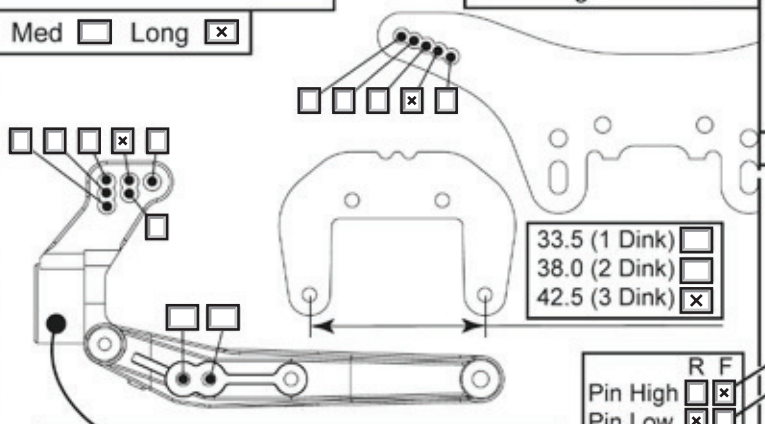

33.5 (1 Dink) [ ]
38.0 (2 Dink) [ ]
42.5 (3 Dink) [x]

Rear Hub Carrier Alloy [ ] Std [x]


Alloy Hub Carrier +1° [ ] -1° [ ]

Blocks Moulded [ ] Alloy [x]

Anti-squat Washers

- 0.00 Difference = 0.00° Anti-squat [ ]
- 0.50 Difference = 0.60° Anti-squat [ ]
- 1.00 Difference = 1.30° Anti-squat [ ]
- 1.50 Difference = 1.95° Anti-squat [•]
- 2.00 Difference = 2.60° Anti-squat [ ]
- 2.50 Difference = 3.25° Anti-squat [ ]
- 3.00 Difference = 3.90° Anti-squat [ ]

Rear 0 mm Front 3.50 mm

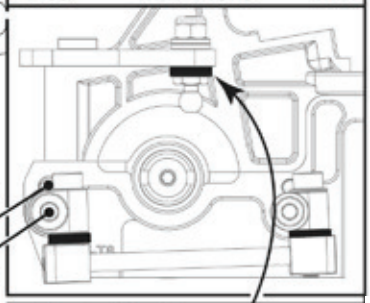

	R	F
Pin High	[ ]	[x]
Pin Low	[x]	[ ]

Link Washers 3.0 mm