Driver and Event

Name	Tom Cockerill
Date	Aug '14
Event	oOple Invernational
Weather	Dry, Warm
Result	Q2, Win

Electrics and Gearing

E.S.C	Nosram Comet HD
Servo	KO RSx2 Response
Reciever	KO
Batteries	Nosram 5800 Saddle
Motor	Nosram Pure 2 7.5
Spur Gear	98T [x] 95T [ ]
Pinion	18
LH Cell Position	Forward [ ] Backward [x]

Track Conditions

Surface	90% Clay, 10% Carpet
Grip Level	Medium
Track Condition	Dry, Small Ruts,

Wheels and Tyres

Rear Wheels	Schumacher Hex (U4366)
Rear Tyre	PL Holeshot
Rear Insert	Std
Front Wheels	Schumacher Hex (U4496)
Front Tyre	PL Holeshot
Front Insert	Std

Diff Type

	Diff Oil
Front Ball [ ] Gear [x]	10,000
Rear Ball [ ] Gear [x]	10,000

Additional Settings

Car Weight	1900g
Weights Added	None
Chassis Carbon [ ]	Option [x]
Wing Gurney Height	Low Line mm

NOTES

CoreRC Springs & Oils
Alloy Chassis (U4147)
F.A.B. (U4133)
7.5Deg Yokes (U3404)

Front Shocks

Oil 450	Spring Red	Shock Cap Sealed [ ] Vented [ ] Emulsion [x]
Piston 3 Hole		
Drilled [ ]	Hole Size Std mm	



Shock Length 21.35 mm

Rear Shocks

Oil 350	Spring Red	Shock Cap Sealed [ ] Vented [ ] Emulsion [x]
Piston 3 Hole		
Drilled [x]	Hole Size 1.60 mm	



Shock Length 28.40 mm


Front Suspension

Anti roll bar No [x] 1.00 [ ] 1.20 [ ] 1.40 [ ] 1.60 [ ]


Camber at Ride Height -1.0 Deg

Ride Height 21 mm


Toe-In -1.0 Deg



Track Washers 1.0 mm

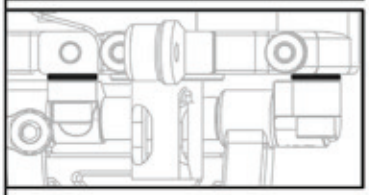


Blocks Moulded [ ] Alloy [x]

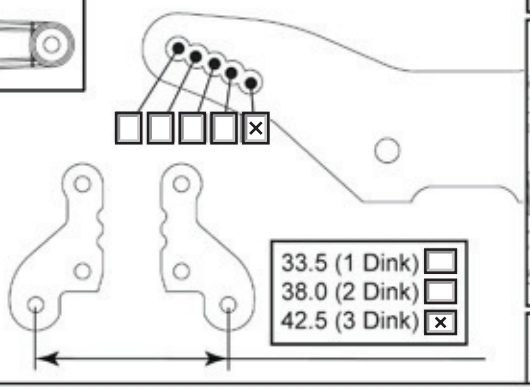


33.5 (1 Dink) [ ]
38.0 (2 Dink) [ ]
42.5 (3 Dink) [x]

Link Washers 0 mm



Front Rake
10.0 Deg [x] 7.5 Deg [ ]

Washers 2.0 mm



Front Yoke
12.5 [ ] (Kit 10.0) [ ] 7.5 [x]

Rear Suspension

Anti roll bar No [ ] 1.00 [ ] 1.20 [x] 1.40 [ ] 1.60 [ ]

Camber at Ride Height -1.0 Deg


Ride Height 21 mm

Wheelbase Short [x] Med [ ] Long [ ]


Rear Toe-in & Track Washers

0.00 Difference = 0.00° Toe-in [ ]
0.50 Difference = 0.60° Toe-in [ ]
1.00 Difference = 1.30° Toe-in [ ]
1.50 Difference = 1.95° Toe-in [ ]
2.00 Difference = 2.60° Toe-in [ ]
2.50 Difference = 3.25° Toe-in [•]
3.00 Difference = 3.90° Toe-in [ ]

Rear 3.0 mm Front 0.5 mm

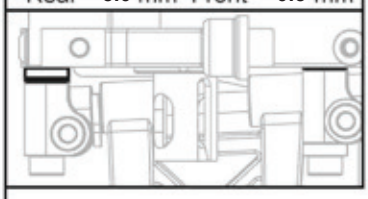

Blocks Moulded [ ] Alloy [x]

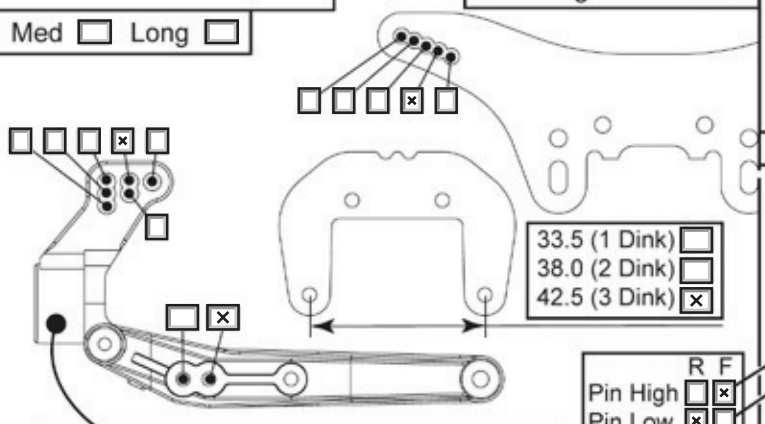

33.5 (1 Dink) [ ]
38.0 (2 Dink) [ ]
42.5 (3 Dink) [x]


Rear Hub Carrier Alloy [ ] Std [x]

Alloy Hub Carrier +1° [ ] -1° [ ]

Anti-squat Washers

0.00 Difference = 0.00° Anti-squat [ ]
0.50 Difference = 0.60° Anti-squat [ ]
1.00 Difference = 1.30° Anti-squat [ ]
1.50 Difference = 1.95° Anti-squat [•]
2.00 Difference = 2.60° Anti-squat [ ]
2.50 Difference = 3.25° Anti-squat [ ]
3.00 Difference = 3.90° Anti-squat [ ]

Rear 0 mm Front 3.50 mm

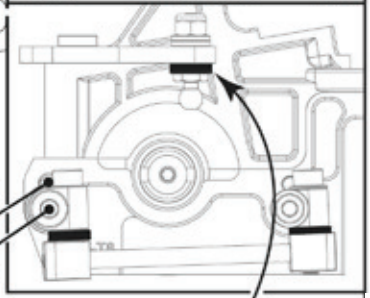

Pin High R [ ] F [x]
Pin Low R [x] F [ ]

Link Washers 3.0 mm