Driver and Event

Name	MAIZER
Date	4/19/14
Event	CLUB
Weather	55DEG
Result	TQ WIN

Electrics and Gearing

E.S.C	SP
Servo	SAVOX 1257TG
Reciever	410
Batteries	6000MA IP
Motor	6.5 SP
Spur Gear	98T [x] 95T [ ]
Pinion	19
LH Cell Position	Forward [ ] Backward [x]

Track Conditions

Surface	MIX HARD AND SOFT DIR
Grip Level	MIX HIGH MID LOW
Track Condition	BUMPY

Wheels and Tyres

Rear Wheels	
Rear Tyre	HOLE SHOT M4
Rear Insert	OPEN CELL STOCK
Front Wheels	
Front Tyre	HOLE SHOT M3
Front Insert	OPEN CELL STOCK

Diff Type

			Diff Oil
Front	Ball [ ]	Gear [x]	7K
Rear	Ball [ ]	Gear [x]	7K

Additional Settings

Car Weight	
Weights Added	TRISH 31G REAR
Chassis	Carbon [x] Option [ ]
Wing Gurney Height	STOCK mm

NOTES

servo foward holes

esc punch set at 5 timining 11deg

Front Shocks

Oil	25AE	Spring	4.5
Piston	3 HOLE		
Drilled [ ]	Hole Size	mm	

Shock Length +1 1/2 mm

Shock Cap: Sealed [ ] Vented [ ] Emulsion [x]




Rear Shocks

Oil	20AE	Spring	CORE RE
Piston	3 HOLE		
Drilled [ ]	Hole Size	mm	

Shock Length +1 1/2 mm

Shock Cap: Sealed [ ] Vented [ ] Emulsion [x]




Front Suspension

Anti roll bar: No [x] 1.00 [ ] 1.20 [ ] 1.40 [ ] 1.60 [ ]


Camber at Ride Height 1 Deg

Ride Height 24 mm


Toe-In 0 Deg

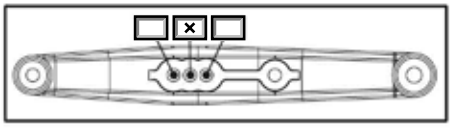


Track Washers mm

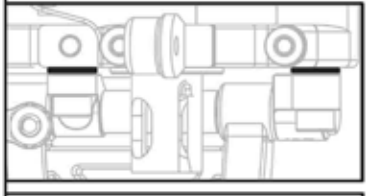

Blocks Moulded [ ] Alloy [x]

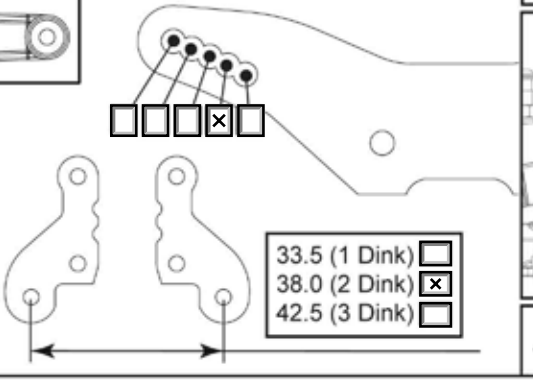


Link Washers mm



Front Rake: 10.0 Deg [x] 7.5 Deg [ ]

Washers 0 mm



Front Yoke: 12.5 [ ] (Kit) 10.0 [x] 7.5 [ ]

Rear Suspension

Anti roll bar: No [ ] 1.00 [ ] 1.20 [x] 1.40 [ ] 1.60 [ ]

Camber at Ride Height 1 Deg


Ride Height 27 mm

Wheelbase: Short [ ] Med [x] Long [ ]


Rear Toe-in & Track Washers

- 0.00 Difference = 0.00° Toe-in [ ]
- 0.50 Difference = 0.60° Toe-in [ ]
- 1.00 Difference = 1.30° Toe-in [ ]
- 1.50 Difference = 1.95° Toe-in [ ]
- 2.00 Difference = 2.60° Toe-in [ ]
- 2.50 Difference = 3.25° Toe-in [ ]
- 3.00 Difference = 3.90° Toe-in [ ]

Rear mm Front mm

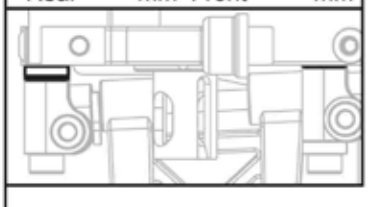

Blocks Moulded [x] Alloy [ ]

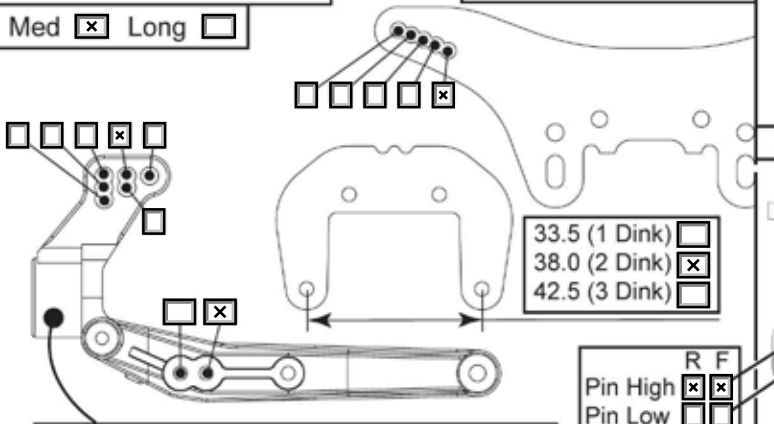

Rear Hub Carrier: Alloy [ ] Std [x]

Alloy Hub Carrier: +1° [ ] -1° [ ]

R F


Pin High [x] [x]

Pin Low [ ] [ ]

Anti-squat Washers

- 0.00 Difference = 0.00° Anti-squat [ ]
- 0.50 Difference = 0.60° Anti-squat [ ]
- 1.00 Difference = 1.30° Anti-squat [ ]
- 1.50 Difference = 1.95° Anti-squat [ ]
- 2.00 Difference = 2.60° Anti-squat [ ]
- 2.50 Difference = 3.25° Anti-squat [ ]
- 3.00 Difference = 3.90° Anti-squat [ ]

Rear mm Front mm

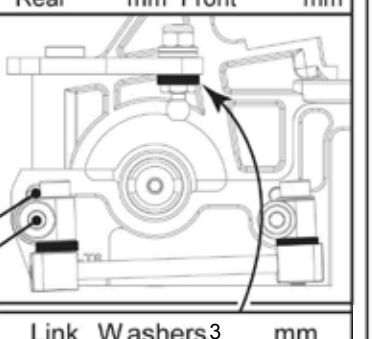

Link Washers 3 mm