Driver and Event

Name	Tom Cockerill
Date	Jan '14
Event	EOS Rd 2
Weather	Indoors
Result	20th

Electrics and Gearing

E.S.C	Nosram Comet HD
Servo	Spektrum
Reciever	KO
Batteries	Nosram 5800 Saddle
Motor	Nosram Pure 2 6.5
Spur Gear	98T [x] 95T [ ]
Pinion	17
LH Cell Position	Forward [ ] Backward [x]

Track Conditions

Surface	Carpet
Grip Level	High
Track Condition	

Wheels and Tyres

Rear Wheels	Schumacher Hex (U4366)
Rear Tyre	Handout
Rear Insert	Handout
Front Wheels	Schumacher Hex (U4496)
Front Tyre	Handout
Front Insert	Handout

Diff Type

			Diff Oil
Front	Ball [ ]	Gear [x]	10,000
Rear	Ball [ ]	Gear [x]	12,000

Additional Settings


Car Weight	1750g
Weights Added	None
Chassis Carbon [x]	Option [ ]
Wing Gurney Height	Middle mm

NOTES

Core RC Springs & Oil
Vented Shock Caps (U4209)
Alloy Yokes (U3404)
Long Front Link on Yoke

Front Shocks

Oil 400	Spring Red	Shock Cap Sealed [ ]	Vented [x] Emulsion [ ]
Piston 3 Hole			
Drilled [ ]	Hole Size Std mm		



Shock Length 82.00 mm

Rear Shocks

Oil 300	Spring Green	Shock Cap Sealed [ ]	Vented [x] Emulsion [ ]
Piston 3 Hole			
Drilled [x]	Hole Size 1.65 mm		



Shock Length 95.50 mm


Front Suspension

Anti roll bar No [ ] 1.00 [ ] 1.20 [ ] 1.40 [ ] 1.60 [x]


Camber at Ride Height -2.0 Deg

Toe-In -1.0 Deg


Ride Height 16 mm



Track Washers 2.0 mm

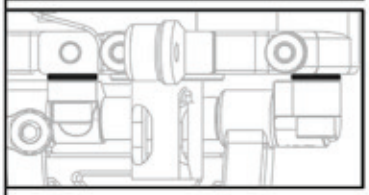


Blocks Moulded [ ] Alloy [x]

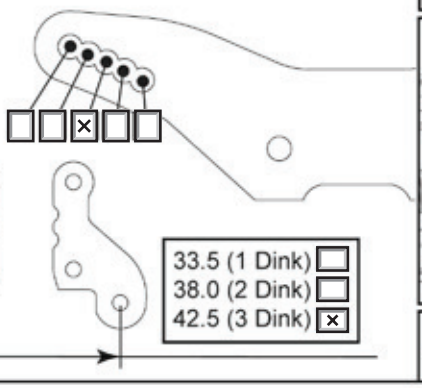


33.5 (1 Dink) [ ]
38.0 (2 Dink) [ ]
42.5 (3 Dink) [x]

Link Washers 2.0 mm



Front Rake
10.0 Deg [ ] 7.5 Deg [x]

Washers 1.0 mm



Front Yoke
12.5 [ ] (Kit 10.0) [ ] 7.5 [x]

Rear Suspension

Anti roll bar No [ ] 1.00 [ ] 1.20 [x] 1.40 [ ] 1.60 [ ]

Camber at Ride Height -2.0 Deg


Ride Height 16 mm

Wheelbase Short [ ] Med [ ] Long [x]


Rear Toe-in & Track Washers

0.00 Difference = 0.00° Toe-in [ ]
0.50 Difference = 0.60° Toe-in [ ]
1.00 Difference = 1.30° Toe-in [ ]
1.50 Difference = 1.95° Toe-in [ ]
2.00 Difference = 2.60° Toe-in [ ]
2.50 Difference = 3.25° Toe-in [•]
3.00 Difference = 3.90° Toe-in [ ]

Rear 0 mm Front 0 mm

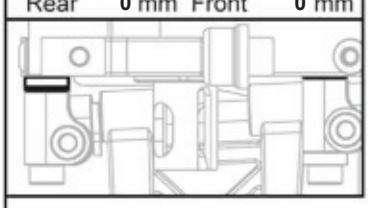

Blocks Moulded [x] Alloy [ ]

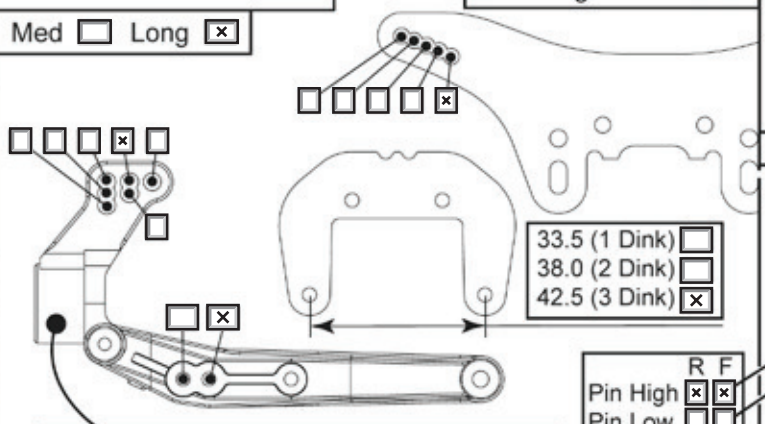

33.5 (1 Dink) [ ]
38.0 (2 Dink) [ ]
42.5 (3 Dink) [x]

Rear Hub Carrier Alloy [ ] Std [x]


Alloy Hub Carrier +1° [ ] -1° [ ]

	R	F
Pin High	[x]	[x]
Pin Low	[ ]	[ ]

Anti-squat Washers

0.00 Difference = 0.00° Anti-squat [ ]
0.50 Difference = 0.60° Anti-squat [ ]
1.00 Difference = 1.30° Anti-squat [ ]
1.50 Difference = 1.95° Anti-squat [•]
2.00 Difference = 2.60° Anti-squat [ ]
2.50 Difference = 3.25° Anti-squat [ ]
3.00 Difference = 3.90° Anti-squat [ ]

Rear N/A mm Front N/A mm

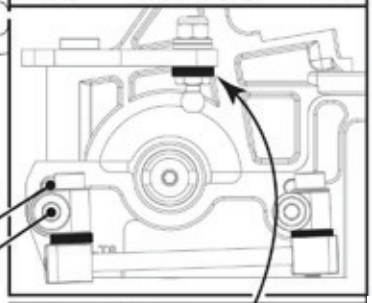

Link Washers 0 mm